


SBitDo[®]

Instruction Manual

使用说明





Pro 3 Bluetooth Gamepad 01

Pro 3 蓝牙手柄 09

Pro 3 Bluetooth Gamepad

English

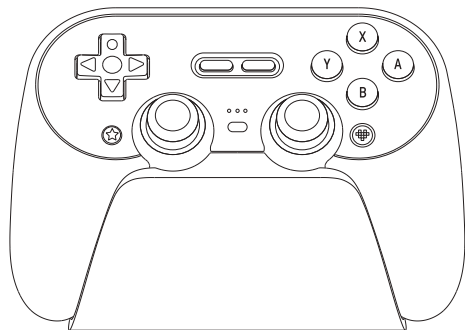

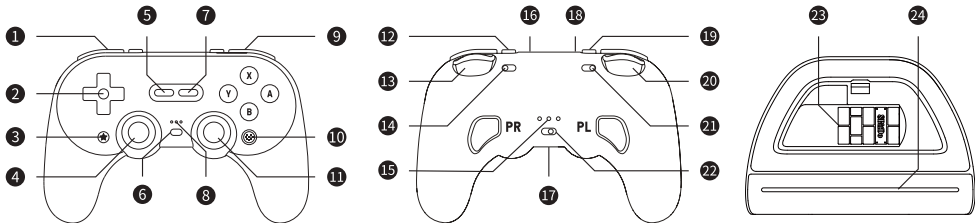

- Press the **start button** to turn on the gamepad.
- Hold the **start button** for 3 seconds to turn off the gamepad.
- Hold the **start button** for 8 seconds to forced shutdown the gamepad.

- | | | |
|---------------------|-------------------------|--------------------------------------|
| ① — L1 button | ⑩ — Home button | ⑲ — L4 button |
| ② — D-pad | ⑪ — R3 button | ⑳ — L2 button |
| ③ — Star button | ⑫ — R4 button | ㉑ — Trigger mode switch |
| ④ — L3 button | ⑬ — R2 button | ㉒ — Mode switch |
| ⑤ — - select button | ⑭ — Trigger mode switch | ㉓ — 2.4G Adapter/Adapter compartment |
| ⑥ — Profile button | ⑮ — Charging contacts | ㉔ — Charging status LED |
| ⑦ — + start button | ⑯ — Power LED | |
| ⑧ — Profile LED | ⑰ — Status LED | |
| ⑨ — R1 button | ⑱ — Pair button | |

Windows

- System requirement: Windows 10 (1903) or above.

Wireless Connection

1. Turn the **Mode switch** to **S/X** position.
2. Press the **start button** to turn on the gamepad.
3. Connect the 2.4G adapter to the USB port of your Windows device, the **Status LED** will remain solid to indicate a successful connection.

Wired Connection

1. Turn the **Mode switch** to **S/X** position.
 2. Connect the gamepad to your Windows device via a USB cable and wait till the gamepad is successfully recognized by the device.
-

Switch 1/2

- System requirement: Switch system 3.0.0 or above.
- NFC scanning, IR camera, HD rumble and notification LED are not supported.

Bluetooth Connection

1. Turn the **Mode switch** to **S** position.
2. Press the **start button** to turn on the gamepad.
3. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **Status LED** will start to roll side to side. (This is required for the very first time only)
4. Go to your Switch Home Page to click on [Controllers], then click on [Change Grip/Order], the **Status LED** will remain solid to indicate a successful connection.

Wireless Connection

- Switch 1: Enable “**Wired Connection**” for Pro Controller in Settings → Controllers and Sensors.
 - Switch 2: Enable “**Wired Connection**” for Nintendo Switch Pro Controller in Settings → Controllers and Peripherals.
1. Turn the **Mode switch** to **S/X** position.
 2. Press the **start button** to turn on the gamepad.
 3. Connect the 2.4G adapter to your Switch device’s USB port, the **Status LED** will remain solid to indicate a successful connection.

Wired Connection

- Switch 1: Enable “**Wired Connection**” for Pro Controller in Settings → Controllers and Sensors.
 - Switch 2: Enable “**Wired Connection**” for Nintendo Switch Pro Controller in Settings → Controllers and Peripherals.
1. Turn the **Mode switch** to **S** position.
 2. Connect the gamepad to your Switch device via a USB cable and wait till the gamepad is successfully recognized by the device.
-

SteamOS

- System requirement: SteamOS 3.7.13 or above.

Bluetooth Connection

1. Turn the **Mode switch** to **D** position.
2. Press the **start button** to turn on the gamepad.
3. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **Status LED** will start to roll side to side. (This is required for the very first time only)
4. Go to your SteamOS device’s “Bluetooth Setting” and turn it on, pair with “**8BitDo Pro 3**”, the **Status LED** will remain solid to indicate a successful connection.

Wired Connection

1. Turn the **Mode switch** to **D** position.
 2. Connect the gamepad to your SteamOS device via a USB cable and wait till the gamepad is successfully recognized by the device.
-

Apple

- System requirement: iOS 26, iPadOS 26, tvOS 26, macOS 26, and visionOS 26.

Apple®, iPadOS®, macOS®, tvOS®, and visionOS® are trademarks of Apple Inc., registered in the U.S. and other countries.

Bluetooth Connection

1. Turn the **Mode switch** to **D** position.
2. Press the **start button** to turn on the gamepad.
3. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **Status LED** will start to roll side to side. (This is required for the very first time only)
4. Go to your Apple device's "Bluetooth Setting" and turn it on, pair with "**8BitDo Pro 3**", the **Status LED** will remain solid to indicate a successful connection.

Wired Connection

- USB wired connection is only available for macOS or iOS/iPadOS devices with USB-C ports.
1. Turn the **Mode switch** to **D** position.
 2. Connect the gamepad to your Apple device via a USB cable and wait till the gamepad is successfully recognized by the device.

Android

- System requirement: Android 13.0 or above.

Bluetooth Connection

1. Turn the **Mode switch** to **D** position.
2. Press the **start button** to turn on the gamepad.
3. Hold the **Pair button** for 3 seconds to enter its pairing mode, the **Status LED** will start to roll side to side. (This is required for the very first time only)
4. Go to your Android device's "Bluetooth Setting" and turn it on, pair with "**8BitDo Pro 3**", the **Status LED** will remain solid to indicate a successful connection.

Wired Connection




- OTG support is required on your Android device, please contact your manufacturer for more information.
1. Turn the **Mode switch** to **D** position.
 2. Connect the gamepad to your Android device via a USB cable and wait till the gamepad is successfully recognized by the device.

Turbo Function

- **D-pad, Home button, L3/L4 buttons, L4/R4 buttons, and PL/PR buttons** are not supported for turbo.
- The turbo settings will not be saved permanently and will revert to default settings after the gamepad is powered off or disconnected.

Turn on Turbo Mode:  +  → 


Turn off Turbo Mode:  +  → 

Turn on Auto Turbo Mode:  +  x 2 → 

Turn off Auto Turbo Mode:  +  → 

L4/R4/PL/PR Buttons Configuration

- Single or multiple buttons on the gamepad can be mapped to the **L4/R4/PL/PR buttons**.
- **L3/R3 buttons** are not supported.
- The **Home LED** will blink continuously when the mapped button is pressed.



Battery

Status –

Low battery



Battery charging



Fully charged



Power LED –

Power LED blinks

Power LED stays solid

Power LED turns off

- Built-in 1000mAh battery pack, 20 hours of usage time via Bluetooth connection and wireless 2.4G connection, rechargeable with 4 hours charging time.
- The gamepad will automatically shut down if it fails to connect within 1 minute of startup, or if there are no operations within 1 minute after establishing a connection.
- The gamepad will not shut down during wired connection.
- Charging and battery life depend on variations in settings or environmental factors, and actual results may vary.

Calibrate Joysticks

- Please follow the steps below:
1. Gamepad in the powered-on state, press and hold the “**L+R+select**” buttons for 8 seconds to enter the calibration mode, the **Home LED** will start to blink.
 2. Push the joysticks to the edge and rotate them slowly 2–3 times.
 3. Slowly press the triggers to the bottom 2–3 times.
 4. Press the same “**L+R+Select**” buttons combination again to complete the calibration.

Safety Warnings

- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.
- This product contains small parts that may cause choking. Not suitable for children under three years old.
- This product features flashing lights. Individuals with epilepsy or photosensitivity should disable the lighting effects before use.
- Cables may cause tripping or entanglement hazards. Keep them away from walkways, children, and pets.
- Stop using this product immediately and seek medical attention if you experience dizziness, visual disturbances, or muscle spasms.

Ultimate Software


Please visit app.8bitdo.com to download the **Ultimate Software V2** to get the latest firmware & additional support.


Support

Please visit support.8bitdo.com for further information & additional support.

Pro 3 蓝牙手柄

中文

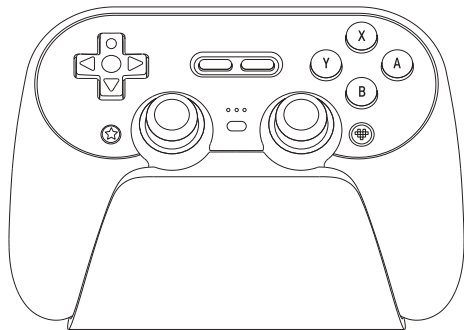

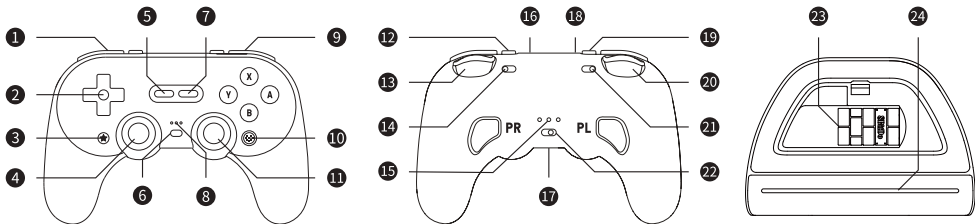

* 开机:按下 **start** 键。

* 关机:按住 **start** 键 3 秒。

* 强制关机:按住 **start** 键 8 秒。

① — L1

② — 方向键

③ — 星号键

④ — L3

⑤ — -select 键

⑥ — 配置键

⑦ — +start 键

⑧ — 配置指示灯

⑨ — R1

⑩ — Home 键

⑪ — R3

⑫ — R4

⑬ — R2

⑭ — 扳机模式开关

⑮ — 充电触点

⑯ — 电源指示灯

⑰ — 状态指示灯

⑱ — 配对键

⑲ — L4

⑳ — L2

㉑ — 扳机模式开关

㉒ — 模式开关

㉓ — 接收器 / 接收器收纳仓

㉔ — 充电指示灯

Windows

* 要求 Windows 设备系统版本为 Windows 10 (1903) 或更高版本。

无线连接

1. 将 **模式开关** 移动到 **S/X** 位置。
2. 按下 **start 键** 开启手柄。
3. 将配备的 2.4G 接收器或装有 2.4G 接收器的底座连接到 Windows 设备的 USB 端口, 连接完成后 **状态指示灯** 常亮。

有线连接

1. 将 **模式开关** 移动到 **S/X** 位置。
2. 使用 USB 线将手柄连接到 Windows 设备的 USB 端口, 等待系统识别完成后即可使用。

Switch 1 / 2

- * 要求 Switch 主机系统版本为 3.0.0 或更高版本。
- * 不支持 NFC 扫描、红外摄像头、HD 振动、通知灯等功能。

蓝牙连接

1. 将 **模式开关** 移动到 **S** 位置。
2. 按下 **start 键** 开启手柄。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 左右滚动闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Switch 主机 **手柄** 选项, 选择 **更改握法 / 顺序**, 等待手柄连接; 连接完成后 **状态指示灯** 常亮。

无线连接

- * Switch 1:请确保 **设置 - 手柄与感应器 - Pro 手柄的有线连接** 功能已开启。
 - * Switch 2:请确保 **设置 - 手柄与外设 - Nintendo Switch Pro 手柄的有线连接** 功能已开启。
1. 将 **模式开关** 移动到 **S/X** 位置。
 2. 按下 **start** 键 开启手柄。
 3. 将配备的 2.4G 接收器连接到 Switch 主机的 USB 端口,连接完成后 **状态指示灯** 常亮。

有线连接

- * Switch 1:请确保 **设置 - 手柄与感应器 - Pro 手柄的有线连接** 功能已开启。
 - * Switch 2:请确保 **设置 - 手柄与外设 - Nintendo Switch Pro 手柄的有线连接** 功能已开启。
1. 将 **模式开关** 移动到 **S** 位置。
 2. 使用 USB 线将手柄连接到 Switch 主机的 USB 端口,等待系统识别完成后即可使用。

SteamOS

- * 要求 SteamOS 设备系统版本为 3.7.13 或更高版本。

蓝牙连接

1. 将 **模式开关** 移动到 **D** 位置。
2. 按下 **start** 键 开启手柄。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 左右滚动闪烁,进入配对状态。(仅首次连接时需要配对)
4. 打开 SteamOS 设备蓝牙,搜索 **8BitDo Pro 3** 手柄连接;连接完成后 **状态指示灯** 常亮。

有线连接

1. 将 **模式开关** 移动到 **D** 位置。
2. 使用 USB 线将手柄连接到 SteamOS 设备的 USB 端口，等待系统识别完成后即可使用。

Apple

* 要求 iOS 26、iPadOS 26、tvOS 26、macOS 26、visionOS 26 或更高版本。

蓝牙连接

1. 将 **模式开关** 移动到 **D** 位置。
2. 按下 **start** 键 开启手柄。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 左右滚动闪烁，进入配对状态。(仅首次连接时需要配对)
4. 打开 Apple 设备蓝牙，搜索 **8BitDo Pro 3** 手柄连接；连接完成后 **状态指示灯** 常亮。

有线连接

* 仅 macOS 和配备 USB-C 端口的 iOS、iPadOS 设备支持有线连接。

1. 将 **模式开关** 移动到 **D** 位置。
2. 使用 USB 线将手柄连接到 Apple 设备的 USB 端口，等待系统识别完成后即可使用。

Android

* 要求 Android 设备系统版本为 13.0 或更高版本。

蓝牙连接

1. 将 **模式开关** 移动到 **D** 位置。
2. 按下 **start** 键 开启手柄。
3. 按住 **配对键** 约 3 秒至 **状态指示灯** 左右滚动闪烁, 进入配对状态。(仅首次连接时需要配对)
4. 打开 Android 设备蓝牙, 搜索 **8BitDo Pro 3** 手柄连接; 连接完成后 **状态指示灯** 常亮。

有线连接

* 需要设备支持 OTG 功能, 请咨询设备制造商。

1. 将 **模式开关** 移动到 **D** 位置。
2. 使用 USB 线将手柄连接到 Android 设备的 USB 端口, 等待系统识别完成后即可使用。

连发功能

* 方向键、Home 键、左 / 右摇杆、L4 / R4 键、PL / PR 键 不支持连发。

* 连发功能不会保存, 关机或断开连接后恢复默认。

开启连发:  +  → 


关闭连发:  +  → 

开启自动连发:  +  x 2 → 

关闭自动连发:  +  → 

配置 L4 / R4 / PL / PR 键


- * 可将手柄上的单个或多个按键复制到 L4 / R4 / PL / PR 键。
- * 左 / 右摇杆 不支持配置。
- * 已配置的按键使用时 Home 指示灯 会持续闪烁。



电源

电源状态

电量不足
正在充电
充电完成



电源指示灯状态

电源指示灯闪烁
电源指示灯常亮
电源指示灯熄灭

- * 配备 1000 mAh 可充电式锂电池, 蓝牙连接可持续使用约 20 小时, 2.4G 连接可持续使用约 20 小时, 充电时间约 4 小时。
- * 开机后 1 分钟内未连接, 或连接后 15 分钟无操作会自动休眠。
- * 使用有线连接时不会自动休眠。
- * 充电和续航时间取决于设置或环境因素差异, 实际结果可能有所不同。

校准摇杆 / 扳机

请按以下操作完成校准：

1. 手柄开机状态下，按住 **L1 键 + R1 键 + Select 键** 8 秒后开始校准，**Home 指示灯** 闪烁。
2. 将左 / 右摇杆推到边缘并缓慢转动 2、3 圈。
3. 缓慢将左 / 右扳机键按到底 2、3 次。
4. 再次按下 **L1 键 + R1 键 + Select 键** 完成校准。

安全警示

- * 请使用制造商的电池、充电器、配件。
- * 在用户使用第三方的配件时，制造商不能对用户的安全负责。
- * 请勿自行拆卸、改装或修理设备。
- * 请勿挤压、拆解、刺穿或尝试改装设备及电池。
- * 对设备的任意变动或改装，将导致制造商对设备不予保修。
- * 产品包含小部件，可能造成窒息危险，不适合 3 岁以下儿童使用。
- * 本产品使用时包含闪烁灯光效果，若有癫痫病史或光敏性反应者使用时请关闭灯光。
- * 产品线缆可能造成绊倒或缠绕危险，请勿放置在行走区域，并远离儿童及宠物。
- * 如产品使用过程中出现头晕、视力异常、肌肉抽搐等症状，请立即停止使用并就医。

自定义配置

请访问 app.8bitdo.cn 获取 **精英软件 V2** 使用。

技术支持

请访问 support.8bitdo.cn 了解详细信息。



Manual



使用说明

