

LogiLink®




4x1 HDMI™ Switch Multiviewer 4K/30 Hz

Art. No.: HD0053

Supports four HDMI input sources to be displayed on one screen with three multi-view modes and seamlessly switch the four HDMI inputs. It also can be controlled through the front panel button or IR control.

Features:

- » Supports multiplexed HDMI 4-input and 1-output
- » Supports 4 by 1 quad multiviewer and seamless switch (with same resolution)
- » Supports scaler up and scaler down function
- » Compliant with HDCP 1.4
- » Supports multi output resolution, up to 4K@30 Hz and Full 3D
- » Supports digital audio format LPCM/AC3/DTS
- » Supports manual control and IR remote control
- » Supports USB upgrade
- » Supports uncompressed audio such as LPCM
- » Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)

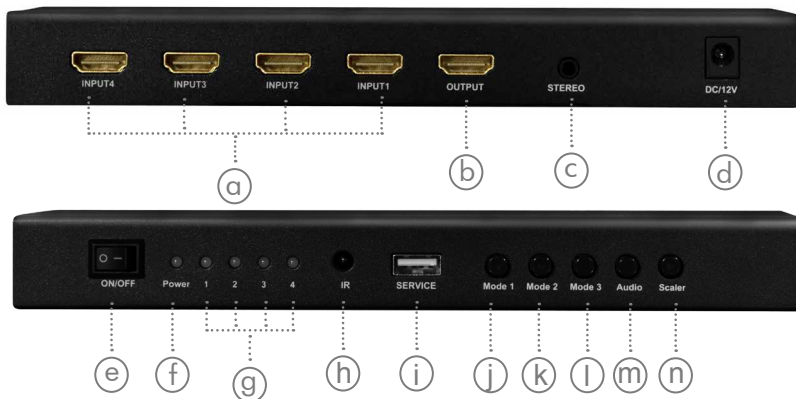


- (a) HDMI input 1-4 ports
- (b) HDMI output port
- (c) Stereo audio output
- (d) DC 12 V input
- (e) Power ON/OFF button
- (f) Power LED indicator
- (g) Input 1-4 LED indicator
- (h) IR Receiver
- (i) Service Port: For firmware update
- (j) Mode 1: "+" type, "I" type modes switch button
- (k) Mode 2: Fullscreen mode seamless switch button
- (l) Mode 3: One bigger and three smaller windows mode switch button
- (m) Audio channel output select button
- (n) Scaler: HDMI output resolution 1080p/1600p/4K@30 Hz switch button



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.



- (o) Power Button: Power standby/power ON
- (p) Audio output mute ON/OFF
- (q) Full Screen Mode: Press 1–4 button will select the corresponding channel and displayed in full screen as a seamless switcher
- (r) Audio Switch: press 1–4 button will select the corresponding audio output (In Mode 1 and 3)
- (s) Mode 1: The four HDMI input sources are displayed in 2x2 on one screen. In this mode, press the button will select the “+” type or “|” type
 Mode 3: The four HDMI input sources are displayed with one bigger and three smaller windows on one screen. In this mode, press the button 1–4 will select the corresponding channel to the bigger window
 Scaler button: Press the button to switch 1080p, 1600p and 4K@30 Hz
- (t) PIP mode: Press button to cycle PIP mode (one big picture one small picture on the right corner of the screen)
 OSD: Press to show the OSD content and disappear 3 seconds later

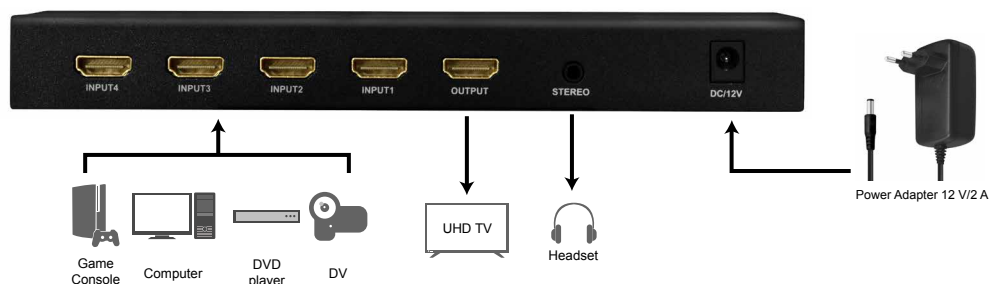

Specifications:

Input Ports	4x HDMI-A female, 1x DC power jack
Output Port	1x HDMI-A female, 1x Stereo
HDMI Version	1.4
HDCP Version	1.4 (only for input)
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz
Video Bandwith	3 Gbps/300 MHz
3D Supporting	Yes
Input and output DDC signal	Yes
Chassis Material	Metal
LED Indicator	Yes
IR Remote Support	Yes
Power Consumption	8 W max.
Power Supply	12 V/2 A
Uncompressed Audio	LPCM 2.0/5.1/7.1 CH 44.1/48 KHz
Compressed Audio	DTS, Dobby Digital
Operating Temperature	0°C–70°C
Operating Humidity	10%–85% RH (no condensation)
Storage Temperature	-10°C–80°C
Storage Humidity	5%–90% RH (no condensation)
Dimensions	21.3x9.2x2.5 cm
Weight	0.485 kg



*The specifications and pictures are subject to change without prior notice.
 *All trade names referenced are the registered trademarks of their respective owners.



Specification of External Power Supply:

Input Voltage	100–240 V, 50/60 Hz 0.65 A max.
Output Power	12 V/2 A, 24 W
DC Plug	5.5x2.1 mm
Dimensions	68x43x68 mm
Cable Length	1.2 m
Weight	0.12 kg



Package Contents:

- » 1x 4x1 HDMI Switch
- » 1x Remote control
- » 1x Power Adapter 12 V/2 A
- » 1x User Manual

Package Information:

- » Packing Dimension: 243x196x60 mm
- » Packing Weight: 0.68 kg
- » Carton Dimension: 505x235x340 mm
- » Carton Q'ty: 10 pcs
- » Carton Weight: 7.4 kg



*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

