
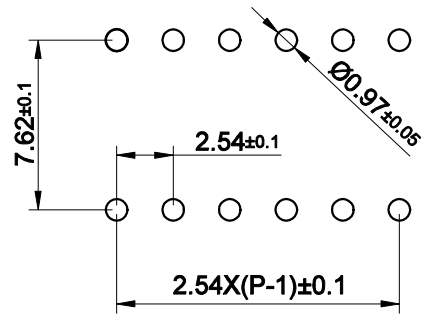
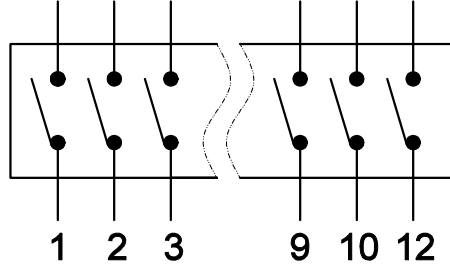
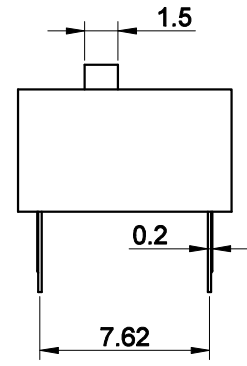




FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

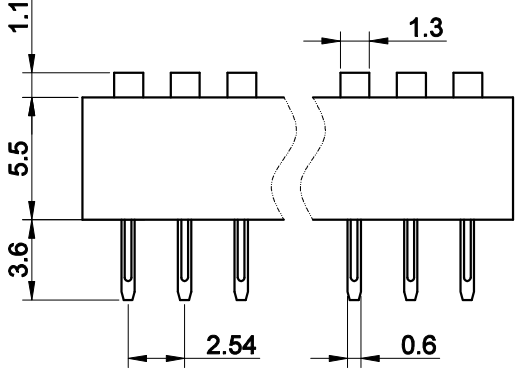

Extend actuator(E)

Circuit

PCB Layout

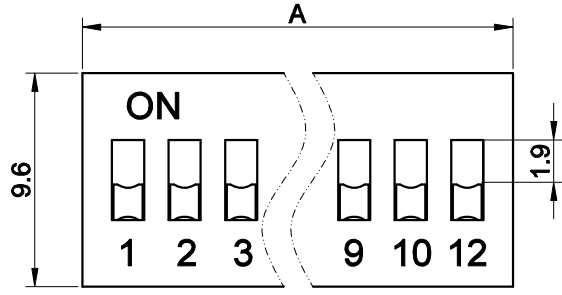

Recessed actuator(R)

Number	DS★01	DS★02	DS★03	DS★04	DS★05	DS★06	DS★07	DS★08	DS★09	DS★10	DS★12
DIM A (mm)	3.54	6.64	9.18	11.72	14.26	16.8	19.34	21.88	24.42	26.96	32.04

Part Number: DS★-◇◆-△

"★"	Actuator
E	Extend actuator
R	Recessed actuator

"◇"	Position
01~12	1To12
11 excluded	

"◆"	Housing Color
R	Red
B	Blue
N	Black

"△"	Plating
GT	Semi Tin Gold
GA	Gold

SPECIFICATIONS:

- 1.Current/voltage rating: 25mA at 24VDC.
- 2.Insulation Resistance: 100MΩ at 250VDC.
- 3.Contact resistance: 50mΩ Max.
- 4.Dielectric strength: 500VAC /1min.
- 5.Operating force: 10N Max.
- 6.Electrical Life: ≤2000.
- 7.Operating temperature: -20°C to 85°C (no ice).
- 8.Operating life: 10N Max.
- 9.Hand soldering: 260°C max. for 2 seconds max.(30 wattiron max.)

Wave soldering: 320°C max. for 5 seconds max. keep switches at OFF.

MATERIALS:

- 1.Cover: PBT.
- 2.Housing: PBT.
- 3.Actuator: PBT.
- 4.Terminals seal: epoxy resin.
- 5.Terminals: Brass, Gold over Nickel Plated.

BRAND 品牌 ONPOW THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	
	USED 用途 APPD 审核 CH 2020/06/20	FINISH 处理 CHKD 校对 NCH 2020/06/20
SCALE 比例 2.8 : 1 UNIT 单位 mm	DR. 制图 ZPD 2020/06/20	
DIMENSIONS 尺寸 0.00 TO 18.00mm ±0.43mm 18.01 TO 30.00mm ±0.52mm 30.01 TO 50.00mm ±0.62mm 50.01 TO 80.00mm ±0.74mm	TITLE 名称 DIP Switch	
DWG NO. 图号 DS Series	SIZE 图纸 A4	
FILE NAME 档案名称 DS. dwg	SHEET 张 1 / 1	REV. 更改 1