



PANEL CUTOUT
MAX.PANEL THICKNESS
8 mm



Seal Ring

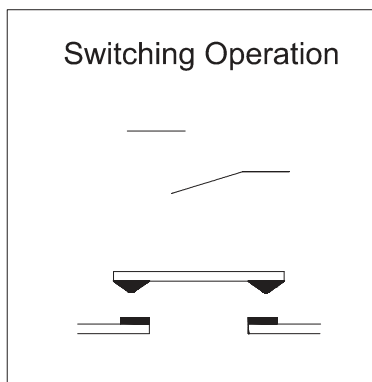

Part Number:GQ19H-10/◎

"◎"	Crust Material
N	Nickel Plated Brass
S	Stainless Steel
A	Al alloy(black)
G	Gold Plated Brass

SPECIFICATIONS:

- 1.Switch Rating: AC250V/0.5A, DC36V/2A.
- 2.Mechanical Life: $\geq 1,000,000$ cycles.
- 3.Electrical Life: $\geq 200,000$ cycles(DC36V);
 $\geq 50,000$ cycles(AC220V).
- 4.Contact Resistance: ≤ 50 m Ω .
- 5.Insulation Resistance: $\geq 1,000$ M Ω .
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25°C ~ +55°C(No Freezing).
- 8.Operating Force: About 4N.
- 9.Operating Travel: About 1.8mm.
- 10.Torque: About 0.8Nm max.applied to nut.
- 11.Protection degree: IP65;IK09.
- 12.Terminal Type: Screw Terminal.

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: ◎.
- 3.Body: ◎.
- 4.Base: PBT.

BRAND 品牌 ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.						
	USED 用途	APPD 审核	CH	2020/03/04			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	FINISH 处理	CHKD 校对	NCH	2020/03/04			
	SCALE 比例	UNIT 单位	DR. 制图	ZPD 2020/03/04			
	1.6 / 1	mm					
DIMENSIONS	TOLERANCE	TITLE 名称		GQ Series Anti-vandal push button			
0.00 TO 18.00mm	± 0.43 mm	DWG NO.					
18.01 TO 30.00mm	± 0.52 mm	图号					
30.01 TO 50.00mm	± 0.62 mm	GQ19H-10					
50.01 TO 80.00mm	± 0.74 mm	FILE NAME 档案名称	GQ19-□.DWG	SHEET 张	1 / 1	REV. 更改	1

FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人