



THE RELIABLE SOURCE

Telecommunication (Universal)

40~80W
SNP-NXXX Series

TB2 Assignment

Pin Model	1	2	3	4	5	6	7	8	9	10	11	12	13	14
SNP-N063	+5V	+3.3V	+3.3V	+3.3V	+3.3V	GND	GND	GND	GND					
SNP-N563	+5V	+5V	+5V	GND	GND	GND	GND	+3.3V	+3.3V	+3.3V				
SNP-Z873	Power fail	+12V	NC	GND	GND	GND	GND	GND	+3.3V	+3.3V	+3.3V	+3.3V	+3.3V	Remote sense +

Output Specifications:

MODEL NO.	OUTPUT RAIL	LOAD			VOLTAGE ACCURACY	RIPPLE NOISE	LINE REG.	LOAD REG.
		MIN.	RATED	PEAK				
SNP-N063	+5V	0A	4 A		+4.75V~+5.30V	50mV	±1%	±5%
	+3.3V	1A	13A		+3.20V~+3.40V	50mV	±1%	±2%
SNP-N563	+3.3V	0.5A	6A		+3.20V~+3.40V	50mV	±1%	±3%
	+5V	0.5A	8A		+4.75V~+5.25V	50mV	±1%	+5%
SNP-Z873	+3.3V	0.5A	24A		+3.25V~+3.35V	50mV	±1%	±1%
	+12V	0A	0.8A		+11.00V~+13.00V	120mV	±2%	±5%


Notes:

- Each output can provide up to peak load temporarily. Continuous staying in more than rated load is not allowed.
- At factory, all outputs in 60% rated load condition, each output is checked to be within the accuracy range while the main output is setting to within the specified accuracy range at rated load.
- Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load at another output set to 60% rated load.
- Ripple & noise is measured by using 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line.
- Hold up time is measured from the end of the last charging pulse to the time which the main output drop down to regulation limit at rated load and nominal line.
- Rated load is maximum loading for flat mounting and free air convection cooling.


-Clark-

Performance for SNP-N063:


1. Switching frequency ripple

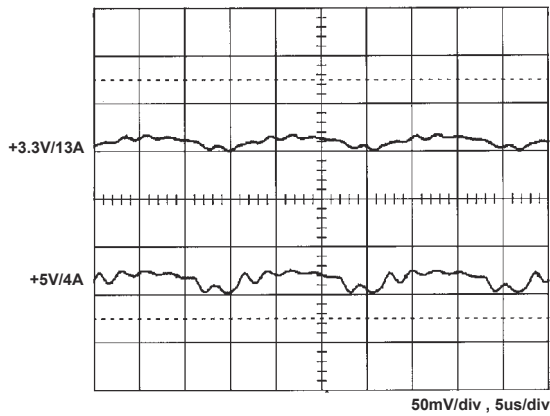


2. Line frequency ripple

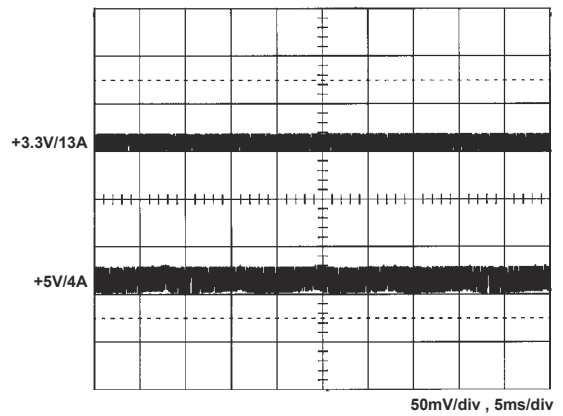


3. Output turn on wave form

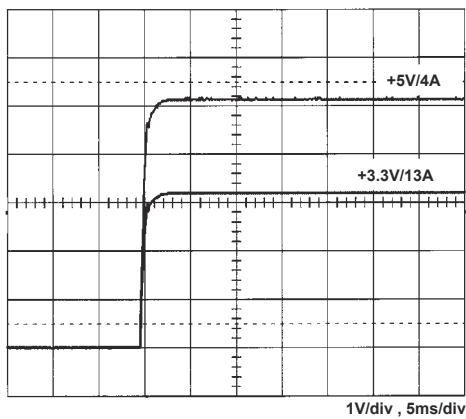


4. Output turn off wave form

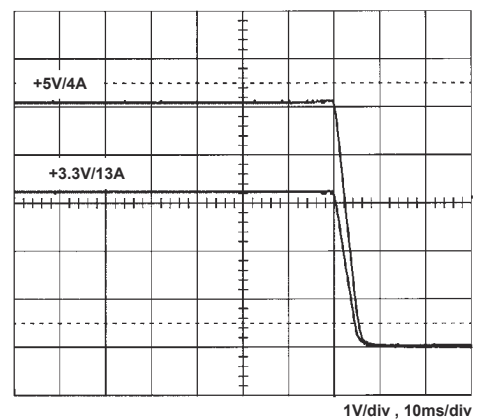


5. Hold-up time

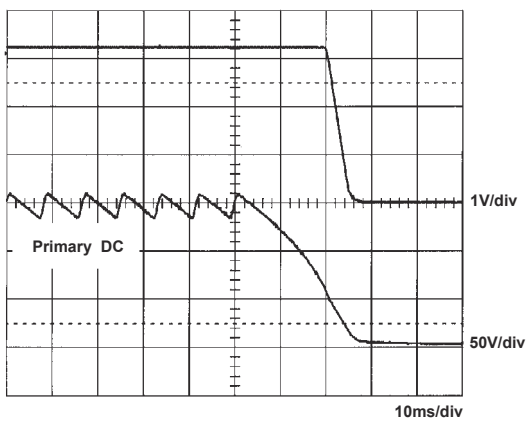


6. Over voltage protection

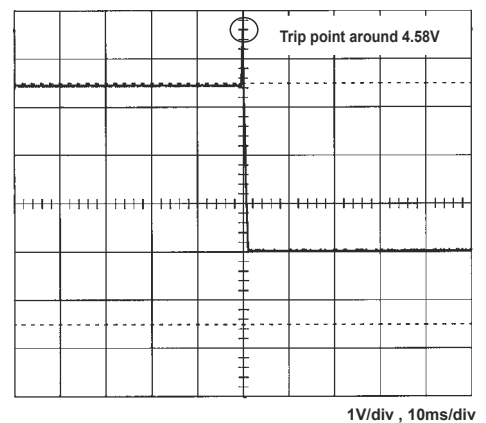


7. +5V step response

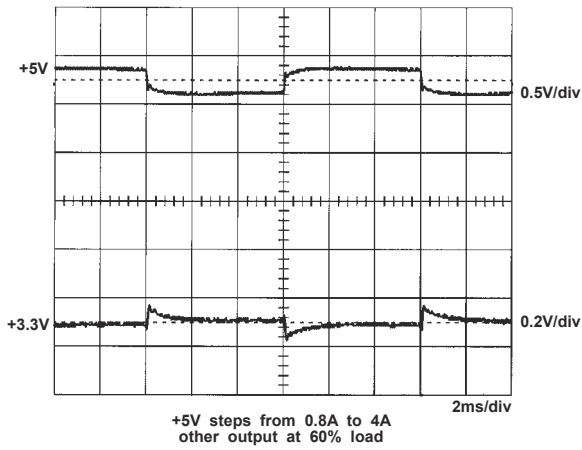

8. +3.3V step response

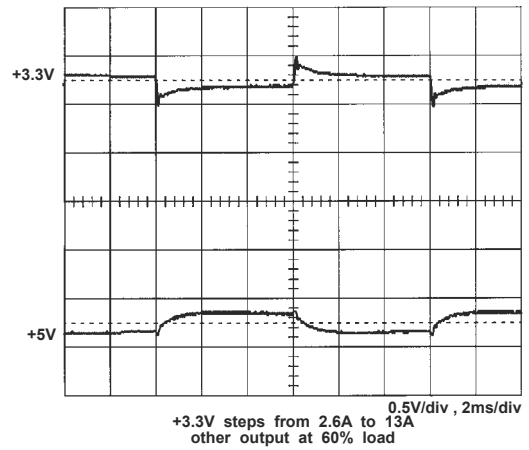

9. FCC B

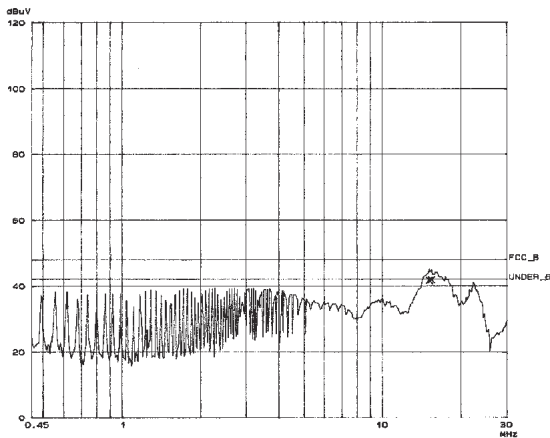

10. CISPR 22B

