

AZ6962

10 AMP SUBMINIATURE POWER RELAY

FEATURES

- High sensitivity, 120 mW pickup
- Dielectric strength 5000 Vrms
- Isolation spacing greater than 10 mm
- Proof tracking index (PTI/CTI) 250
- Epoxy sealed version available
- Reinforced insulation, EN 60730-1 (VDE 0631, part 1) EN 60335-1 (VDE 0700, part 1)
- UL, CUR file E44211
- VDE certificate 40025524



CONTACTS

| | |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Arrangement | SPDT (1 Form C), SPST (1 Form A, 1 Form B) |
| Ratings | Resistive load: Max. switched power: 300 W or 2500 VA Max. switched current: 10 A Max. switched voltage: 240 VDC* or 440 VAC * Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory. |
| Rated Load UL, CUR | See chart for UL contact ratings on page 3. |
| VDE | See chart for VDE contact ratings on page 3. |
| Material | Silver tin oxide [1], silver nickel [2], gold plating available |
| Resistance | < 100 milliohms initially |

COIL

| | |
|------------------------------------|---------------------------------------------------------------|
| Power | |
| At Pickup Voltage (typical) | 120 mW (up to 24 VDC coil) 140 mW (48 VDC and 60 VDC coil) |
| Max. Continuous Dissipation | 1.2 W at 20°C (68°F) ambient |
| Temperature Rise | 20°C (36°F) at nominal coil voltage |
| Temperature | Max. 130°C (266°F) |

NOTES

| |
|-----------------------------------------------------------|
| 1. All values at 20°C (68°F). |
| 2. Relay may pull in with less than "Must Operate" value. |
| 3. Specifications subject to change without notice. |

GENERAL DATA

| | |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Life Expectancy Mechanical Electrical | Minimum operations 1 x 10 ⁷ 1 x 10 ⁵ at 8 A 250 VAC res. |
| Operate Time (typical) | 7 ms at nominal coil voltage |
| Release Time (typical) | 3 ms at nominal coil voltage (with no coil suppression) |
| Dielectric Strength (at sea level for 1 min.) | 5000 Vrms coil to contact 1000 Vrms between open contacts |
| Insulation Resistance | 1000 megohms min. at 20°C, 500 VDC, 50% RH |
| Insulation (according to DIN VDE 0110, IEC 60664-1) | C250 Overvoltage category: III Pollution degree: 3 Nominal voltage: 250 VAC |
| Dropout | Greater than 10% of nominal coil voltage |
| Ambient Temperature Operating | At nominal coil voltage -40°C (-40°F) to 85°C (185°F) |
| Vibration | Break: 0.031" (0.8 mm) DA at 10–55 Hz Make: 0.059" (1.5 mm) DA at 10–55 Hz |
| Shock | Break Contact: 5 g Make Contact: 10 g |
| Enclosure | P.B.T. polyester, UL94 V-O |
| Terminals | Tinned copper alloy, P.C. |
| Max. Solder Temp. | 270°C (518°F) |
| Max. Solder Time | 5 seconds |
| Max. Solvent Temp. | 80°C (176°F) |
| Max. Immersion Time | 30 seconds |
| Weight | 8 grams |
| Packing unit in pcs | 20 per plastic tube / 1000 per carton box |

ZETTLER electronics GmbH - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com
fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2017-02-21


AZ6962

RELAY ORDERING DATA


| COIL SPECIFICATIONS | | | | ORDER NUMBER* | |
|---------------------|------------------|---------------------|---------------------|--------------------|-----------------|
| Nominal Coil VDC | Must Operate VDC | Max. Continuous VDC | Coil Resistance Ohm | 1 Form A (SPST-NO) | 1 Form C (SPDT) |
| 5 | 3.5 | 11.6 | 113 ± 10% | AZ6962-1AE-5D | AZ6962-1CE-5D |
| 6 | 4.2 | 14.0 | 164 ± 10% | AZ6962-1AE-6D | AZ6962-1CE-6D |
| 9 | 6.3 | 20.8 | 360 ± 10% | AZ6962-1AE-9D | AZ6962-1CE-9D |
| 12 | 8.4 | 27.2 | 620 ± 10% | AZ6962-1AE-12D | AZ6962-1CE-12D |
| 15 | 10.5 | 31.0 | 970 ± 10% | AZ6962-1AE-15D | AZ6962-1CE-15D |
| 18 | 12.6 | 39.4 | 1,295 ± 10% | AZ6962-1AE-18D | AZ6962-1CE-18D |
| 24 | 16.8 | 53.1 | 2,350 ± 10% | AZ6962-1AE-24D | AZ6962-1CE-24D |
| 48 | 33.6 | 98.0 | 8,000 ± 15% | AZ6962-1AE-48D | AZ6962-1CE-48D |
| 60 | 42.0 | 122.4 | 12,500 ± 15% | AZ6962-1AE-60D | AZ6962-1CE-60D |

* "1AE" or "1CE" denote silver tin oxide contacts.
 Substitute "1BE" in place of "1AE" or "1CE" for 1 Form B relay.
 Substitute "1AB" or "1BB" or "1CB" in place of "1AE" or "1BE" or "1CE" for silver nickel contacts.
 Add suffix "E" at the end of order number for sealed version.
 Add suffix "A" at the end of order number for gold plated contacts.
 Note: 15 VDC coil is not VDE approved!


MECHANICAL DATA

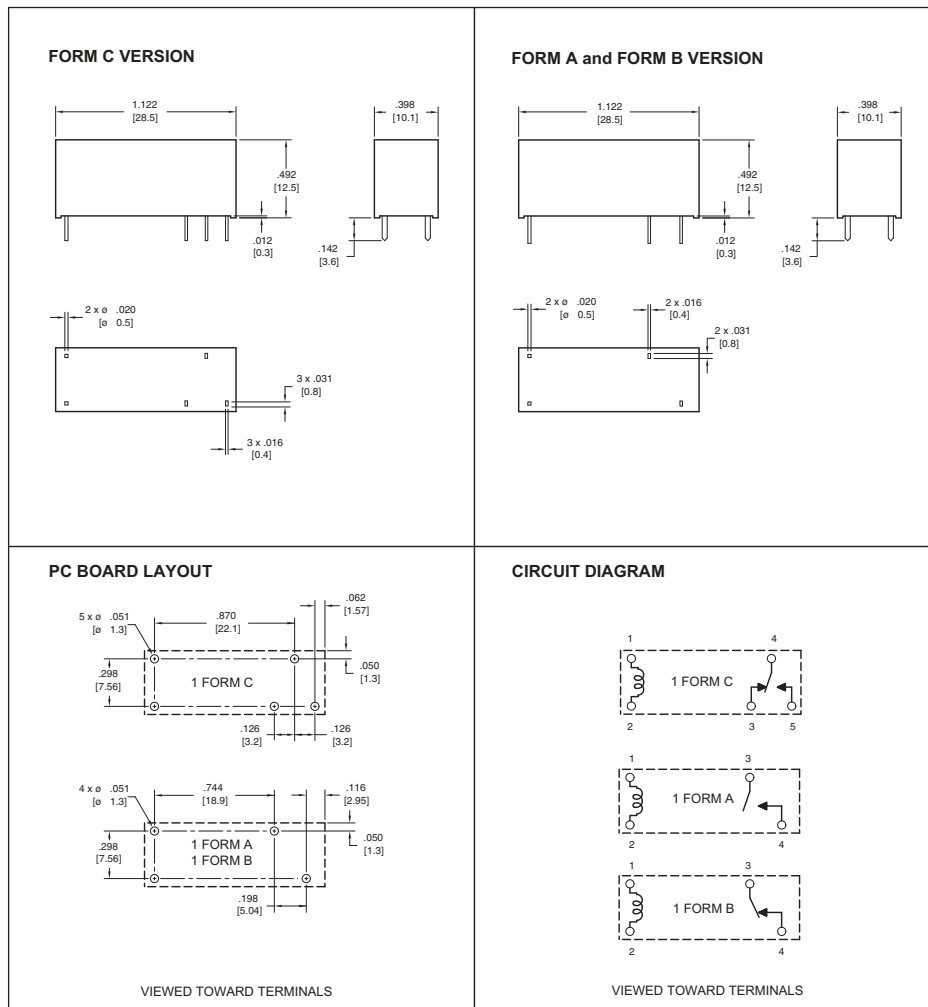

Coil Temperature Rise

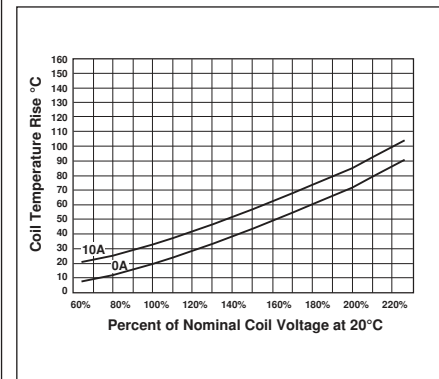

Maximum Switching Capacity (1 Form A, 1 Form B and 1 Form C)

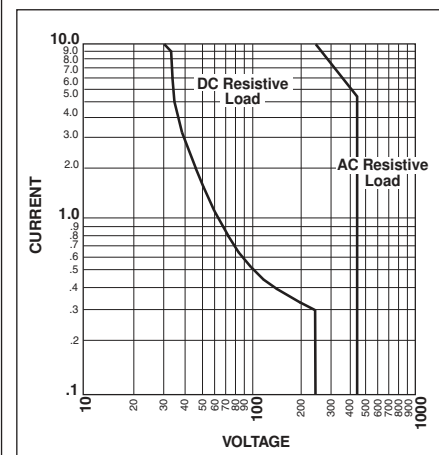

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"

ZETTLER electronics GmbH - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com
 fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2015-03-31

AZ6962

UL/CUR FILE E44211 APPROVED CONTACT RATING

| Load Type | Cycles | Voltage | 1 Form A (N.O.) | 1 Form B (N.C.) | 1 Form C | | Contact Material | Ambient Temperature |
|-------------|--------|---------|--------------------|--------------------|----------|--------|---------------------|------------------------|
| | | | | | (N.O.) | (N.C.) | | |
| Resistive | 100k | 250 VAC | 10 A | - | 10 A | - | [1][2] | 85°C |
| | 30k | 250 VAC | 10 A | 10 A | 10 A | 10 A | [1][2] | 85°C |
| | 30k | 30 VDC | 10 A | 10 A | 10 A | 10 A | [1][2] | 85°C |
| General Use | 100k | 250 VAC | 4 A | - | 4 A | - | [2] | 110°C |
| | 100k | 30 VDC | 4 A | - | 4 A | - | [2] | 110°C |
| | 30k | 250 VDC | 10 A | 10 A | 10 A | 10 A | [2] | 70°C |
| MotorLoad | 30k | 240 VAC | 1/2 HP | - | 1/3 HP | - | [1][2] | 85°C |
| | 30k | 120 VAC | 1/3 HP | - | 1/3 HP | - | [1] | 85°C |
| Pilot Duty | - | 30 VDC | 1 A | 1 A | 1 A | 1 A | [2] | 85°C |
| Inductive | - | - | B300 | B300 | B300 | B300 | [1][2] | 85°C |
| | - | - | R300 | R300 | R300 | R300 | [1][2] | 85°C |

VDE CERTIFICATE 4002524 APPROVED CONTACT RATING

| Load Type | Cycles | Voltage | 1 Form A (N.O.) | 1 Form B (N.C.) | 1 Form C | | Contact Material | Ambient Temperature |
|---------------------------------|--------|---------|-------------------------|--------------------|-------------------------|--------|---------------------|------------------------|
| | | | | | (N.O.) | (N.C.) | | |
| Resistive | 100k | 250 VAC | 8 A | 8 A | - | - | [1][2] | 85°C |
| | 100k | 250 VAC | 10 A * | - | - | - | [1] | 70°C |
| | 100k | 250 VAC | - | - | 8 A | 8 A | [2] | 85°C |
| | 10k | 250 VAC | - | - | - | 8 A | [1] | 85°C |
| | 100k | 250 VAC | - | - | 8 A | - | [1] | 85°C |
| | 100k | 250 VAC | - | - | 10 A | - | [2] | 85°C |
| Inductive VDE 0631 Part 1 | 50k | 250 VAC | 10(4) A * | - | - | - | [1] | 85°C |
| | 100k | 250 VAC | - | 2(2) A | - | - | [2] | 85°C |
| | 100k | 250 VAC | - | - | 2(2) A | 2(2) A | [1] | 85°C |
| | 100k | 250 VAC | - | - | 8(4) A | - | [1] | 85°C |
| | 30k | 250 VAC | - | - | - | 6(4) A | [1] | 85°C |
| Inductive AC-15 | 100k | 250 VAC | On: 30 A cos phi 0.7 | - | On: 30 A cos phi 0.7 | - | [1] | 85°C |
| | 100k | 250 VAC | Off: 3 A cos phi 0.4 | - | Off: 3 A cos phi 0.4 | - | [1] | 85°C |

* with open vent hole

[1] Silver tin oxide

[2] Silver nickel

ZETTLER electronics GmbH - A ZETTLER GROUP Company

Junkersstr. 3, D-82178 Puchheim, Germany

phone: +49 89 800 97-0 office@ZETTLERelectronics.com

fax: +49 89 800 97-200 www.ZETTLERelectronics.com

This product specification to be used only together with the application notes
which can be downloaded from <http://www.ZETTLERelectronics.com/pdfs/relais/ApplicationNotes.pdf>

2015-03-31