


SPECIFICATION:

Operating Current (Nom.):	1 A
Operating Temperature:	-25°C to 85°C
Insulation Resistance (Min.):	100 MΩ
Contact Resistance (Max.):	30 mΩ
Dielectric Strength:	250 Vac

ROHS
COMPLIANT

MATERIAL:

Material (Terminal):	copper alloy, gold plated
Material (Insulation):	LCP
Flammability Class:	UL 94 V-0
Material (Contact Area):	copper alloy, gold plated

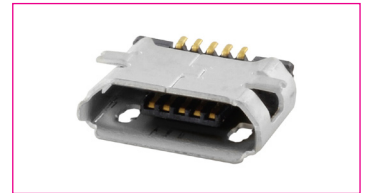


HANDLING:

Packaging:	taped
------------	-------

TOLERANCE:

.X:	± 0.30
.XX:	± 0.20

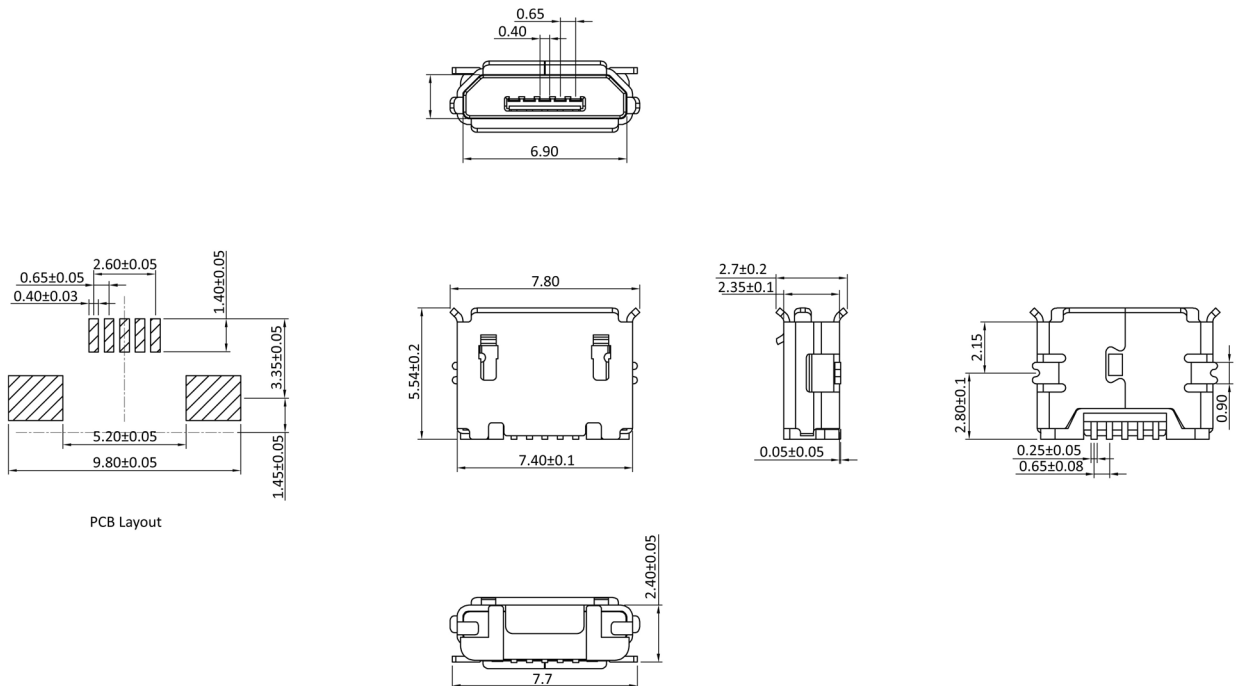

Order Information

Identifier:

MICUB5BBS

USB 2.0 Socket 5 poles B-Typ SMT