

800pcs 2:1 Heat shrink tube-assortment


Item-No.: 22CA142 (1/2)

This range is particularly suitable for hobbyists, craftsmen, field service, service workshops, electronics and the laboratory needs. 800 pieces of shrinking ratio 2:1 standard shrinking tube for a range of application diameter from 1.5 to 12.0 mm.

The heat-shrink tubing can be used for insulation, protective covering of components, as anti-kink protection, protection against corrosion, as well as repair of cables and lines, and much more be used.



| | |
|-----------------------|----------------------|
| Shrinking ratio | 2 : 1 |
| Material | PE |
| Shrinking temperature | 70°C - 110°C |
| Operation temperature | -40°C - 125°C |
| Flammability | VW-1 |
| Tensile strength | ≥ 10.4Mpa |
| Elongation at break | ≥ 300% |
| Rated voltage | 600V |
| Dielectric strength | ≥ 1.5kv/mm at 30sec. |
| Volume resistivity | ≥ 10 ¹⁴ Ω |

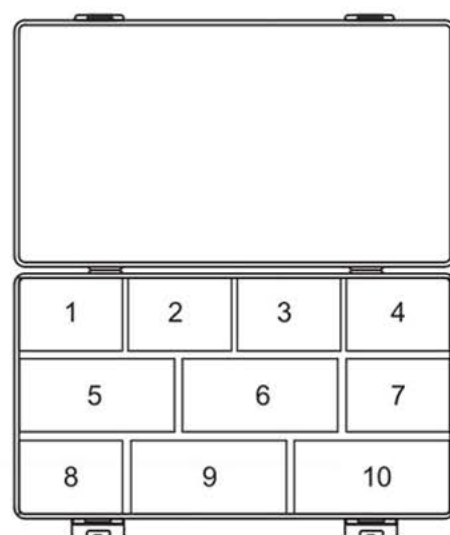

set contents


| Section | Heat shrink tube | | Length | pcs |
|---------|------------------|----------------|--------|-----|
| | Inner diameter ø | after shrink ø | | |
| 1-2 | 1.5 mm | 0.85 mm | 45 mm | 150 |
| 3-4 | 2.5 mm | 1.3 mm | 45 mm | 110 |
| 5 | 3.5 mm | 1.8 mm | 65 mm | 60 |
| 6 | 5.0 mm | 2.5 mm | 65 mm | 30 |
| 7 | 6.0 mm | 3.0 mm | 45 mm | 25 |
| 8 | 8.0 mm | 4.0 mm | 45 mm | 55 |
| 9 | 9.0 mm | 4.5 mm | 65 mm | 55 |
| 10 | 12.0 mm | 6.0 mm | 65 mm | 55 |

Heat shrink tube 2:1 assortment 620 pcs

Item-No.: 22CA142 (2/2)

This range is particularly suitable for hobbyists, craftsmen, field service, service workshops, electronics and the laboratory needs. 620 pieces of shrinking ratio 2:1 standard shrinking tube for a range of application diameter from 1.0 to 13.0 mm.

The heat-shrink tubing can be used for insulation, protective covering of components, as anti-kink protection, protection against corrosion, as well as repair of cables and lines, and much more.

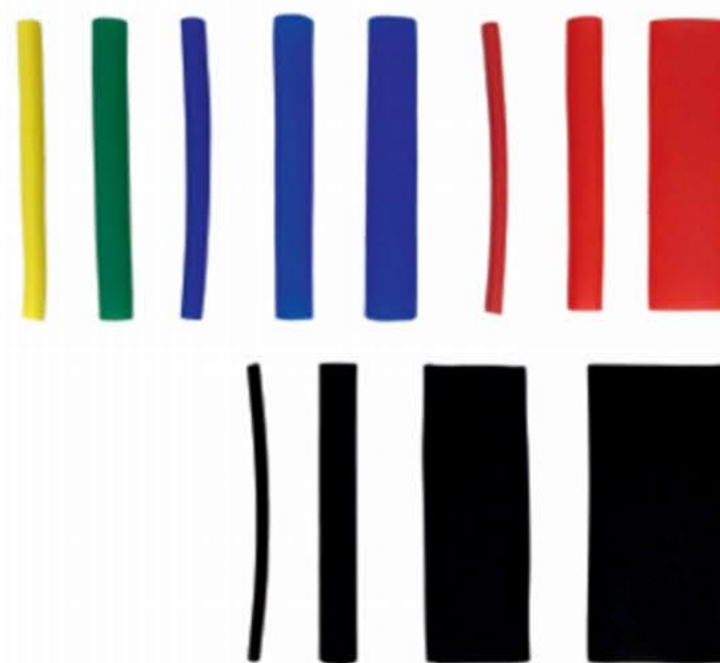

Technical Specifications

Material: PE • Shrink ratio: 2:1 • Shrinking temperature: 80°C ... 125°C • Operation temperature: -20°C ... 130°C • Flammability: VW-1 • Tensile strength: 10 Mpa • Rated voltage: 600 V

Content

Quantity x Internal Diameter x Single Length x Color:

120pcs x 1.0mm x 45mm Black/ 95pcs x 1.5mm x 45mm Red / 75pcs x 2.0mm x 45mm Yellow / 55pcs x 2.5mm x 45mm Blue / 55pcs x 3.5mm x 45mm Green / 45pcs x 4.0mm x 45mm Red / 45pcs x 4.0mm x 45mm Black 35pcs x 5.0mm x 45mm Blue / 20pcs x 6.0mm x 45mm Blue / 30pcs x 7.0mm x 45mm Red 25pcs x 10.0mm x 45mm Black / 20pcs x 13.0mm x 45mm Black