

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

A

B

B

C



C

D


D

E

E

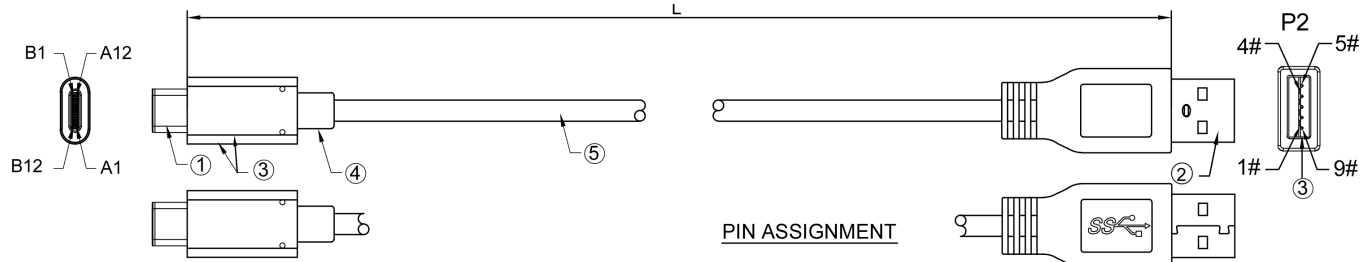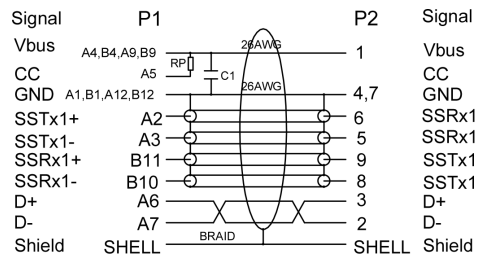

PIN ASSIGNMENT

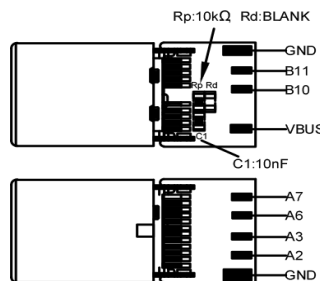

PCB VIEW

F

F

G

G

H

H



P/N No	Length(L)
45247	150 ±10mm
67999	500 ±20mm
67890	1000 ±20mm
	1500 ±30mm
71221	2000 ±30mm

USB3.1 Gen. 1 SuperSpeed Kabel

- Verbinder: USB3.0 A-Stecker > USB-C™ Stecker
- Kontakte: vergoldet
- Schale: vernickelt
- Datenrate: max. 5 Gbit/s
- Schirmung: 3-fach
- Isolierung: PVC; schwarz
- Innenleiter: 28+28+24 AWG Cu
- RoHS-konform

USB3.1 Gen. 1 SuperSpeed Cable

- Connectors: USB3.0 A plug > USB-C™ plug
- Contacts: gold-plated
- Shell: nickel-plated
- Data transfer: max. 5Gbps
- Shielding: triple
- Insulation: PVC; black
- Inner conductor: 28+24+24 AWG Cu
- RoHS compliant

I

I

J

J

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	20.07.2017	ss
		gepr.:	20.07.2017	ss
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung	Blatt
USB 3.1 C/A 3.0 0015	
SCHWARZ 0.15 m	
Zeichnungs-Nr.:	von
45247	



1 2 3 4 5 6 7 8 9 10 11 12 13 14