

SPECIFICATION:

Operating Current (Nom.): 1 A
 Operating Temperature: -40°C to 105°C
 Insulation Resistance (Min.): 1000 MΩ
 Contact Resistance (Max.): 20 mΩ
 Dielectric Strength: 500 Vac

MATERIAL:



Material (Terminal): brass
 Material (Housing): PBT
 Flammability Class: UL 94 V-0
 Material (Contact Area): brass, gold plated

HANDLING:

Packaging: tray

TOLERANCE:

.X: ± 0.25
 .XX: ± 0.20

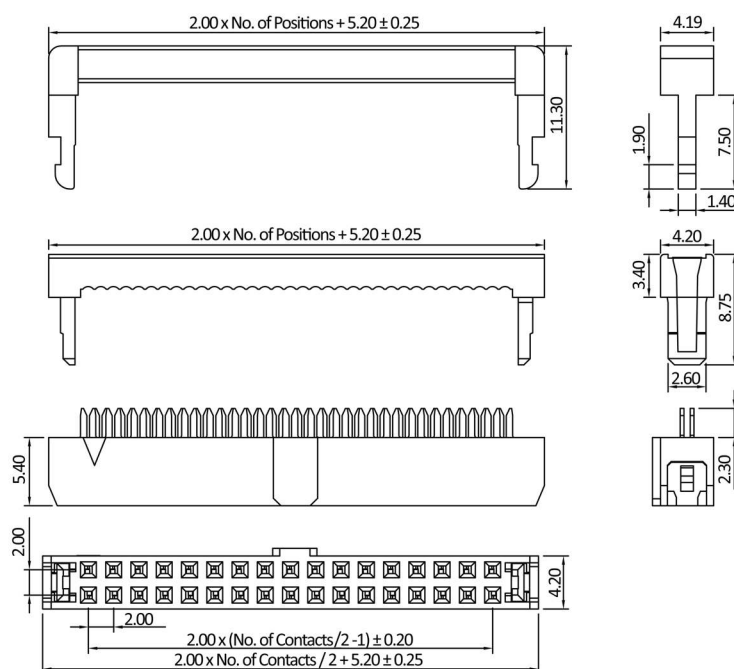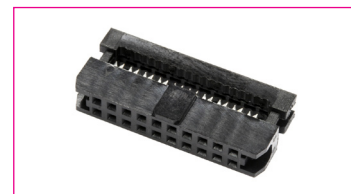

Order Information

Identifier:	No. of Contacts:	Pitch:	Version:
PV	#	RM2	#
IDC socket	6: 2 x 3 8: 2 x 4 10: 2 x 5 14: 2 x 7 16: 2 x 8 20: 2 x 10 24: 2 x 12 26: 2 x 13 34: 2 x 17 40: 2 x 20 44: 2 x 22	Pitch 2.0 mm	empty: w/o strain relief * S: with strain relief

* = Standard