





**DRAWING**

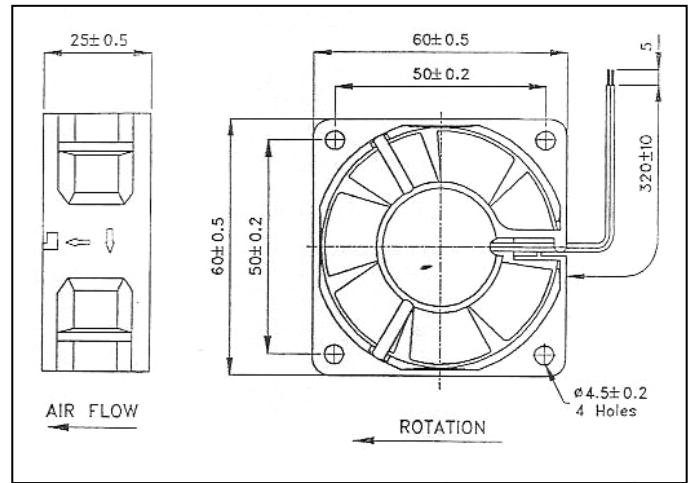

**FEATURES**

- Glass fibre reinforced plastic (PBT) fan casing and impeller.
- Brushless dc motor. I.C. protected against running overload.
- Electrical connection via 2 leads UL1007 AWG24, 320mm long.
- Rated temperature range:  
 Ball bearing from -20°C to +70°C  
 Sleeve bearing from -10°C to +60°C  
 Hypro bearing from -10°C to +60°C
- Service life L10:  
 Ball bearing 70,000 hours at 40°C  
 40,000 hours at t max  
 Sleeve bearing 50,000 hours at 40°C  
 35,000 hours at t max  
 Hypro bearing 70,000 hours at 40°C  
 40,000 hours at t max
- Weight 58g.

**AIR FLOW CURVES**

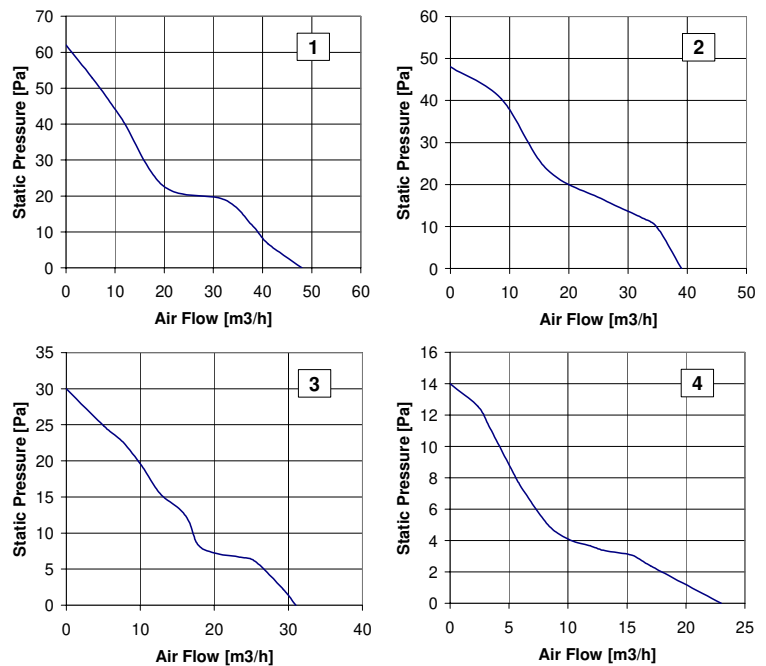

Please refer to our terms of sales including our warranty and limited liabilities clauses.

Model	Diagram	Bearing #			Rated Voltage [V]	Input Power [W]	Speed [rpm]	Air Flow [m3/h]	Static Pressure [Pa]	Noise [dB(A)]	Approvals		
		S	H	B							UL	CUL	TUV
D06A04SW#A00	1	★	★	★	12	2.6	5300	48	62	37.0	S,H,B		
D06A04HW#A00	2	★	★	★	12	2.8	4500	39	48	32.3	S,H,B	S,H,B	
D06A04MW#A00	3	★	★	★	12	1.7	3500	31	30	24.0	S,H,B	H	
D06A04LW#A00	4	★	★	★	12	1.0	2500	23	14	16.1	S,H,B	H,B	
D06A05SW#A00	1	★	★	★	24	3.1	5300	48	62	37.0			
D06A05HW#A00	2	★	★	★	24	3.6	4500	39	48	32.3	S,H,B		
D06A05MW#A00	3	★	★	★	24	1.9	3500	31	30	24.0	S,H,B		
D06A05LW#A00	4	★	★	★	24	1.4	2500	23	14	16.1	S,H,B		

“#” : S= Sleeve, H= Hypro, B= Ball



Fandis S.p.A. Via per Castelletto, 69  
 28040 Borgoticino (No) Italy  
 Tel. +39 0321 96.32.32 Fax +39 0321 96.32.96  
 info@fandis.it • www.fandis.it

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV  
**ISO 9001/2000**

All specifications, data and drawings are subject to change without notice and are approximate.