

**SPECIFICATION:**




Operating Current (Nom.): 1 A  
 Operating Temperature: -40°C to 70°C  
 Insulation Resistance (Min.): 500 MΩ  
 Contact Resistance (Max.): 30 mΩ  
 Dielectric Strength: 500 Vac

**MATERIAL:**

Material (Housing): steel, front nickel plated and back tin plated  
 Front Insulator: PBT black  
 Back Insulator: PA 66 black  
 Flammability Class: UL 94 V-0

**HANDLING:**

Terminal: crimp  
 Packaging: tray

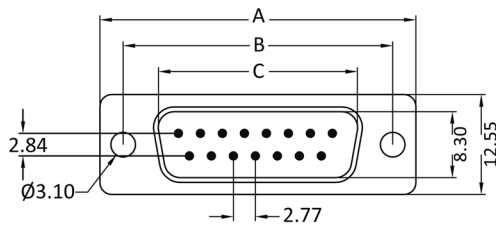

**Dimensions**

Number of Contacts:	A:	B:	C:
9	30.85	25	16.92
15	39.25	33.35	25.25
25	53.1	47.04	38.96
37	69.4	63.5	55.42

**Order Information**

Identifier:	No. of Contacts:	Version:
<b>ST</b>	<b>#</b>	<b>CR</b>
D-Sub Male housing	9: 9 poles	crimp termination
	15: 15 poles	
	25: 25 poles	
	37: 37 poles	