

# LogiLink®

## 4K HDMI™ Over IP Extender/Splitter Set, 70 m

Art. No.: HD0030





This 4K HDMI Over IP extender set distributes 1 HDMI source to 2 HDMI displays over network cable simultaneously with 4K@60 Hz resolution.


### Features:

- » Supports 4K@60 Hz up to 70 m over a single Cat. 5e/6/7/8 cable
- » Connects one HDMI source to two HDMI displays at the same time
- » Resolution up to UHD 4K@60Hz (YUV 4:4:4) and Full 3D
- » Bandwidth: 6.0 Gbps/600 MHz per channel (18 Gbps total)
- » Compatible with HDCP2.2 and HDCP1.4 (bypass function)
- » Supports HDR10, IR and bi-directional PoC (12 V)
- » Supports uncompressed audio such as LPCM 7.1
- » Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio™ and Dolby TrueHD)
- » Compatible with Windows, Mac OS and Linux OS
- » Plug and Play, no software installation required

### Transmitter

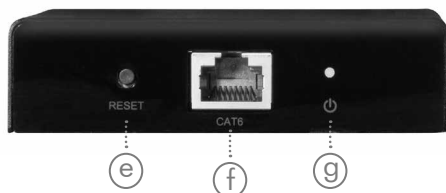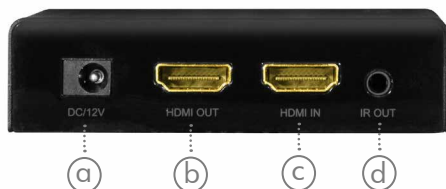

### Receiver

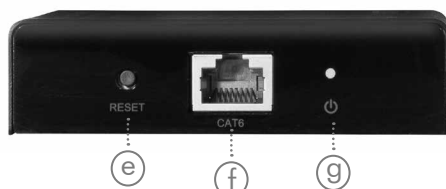


- (a) Connect to DC 12 V Power Supply
- (b) Connect to output devices via HDMI male output port for local loop out
- (c) Connect to input sources via HDMI male input port
- (d) IR OUT: IR signal output port
- (e) Short click to Reset
- (f) UTP ethernet cable connection port
- (g) Power LED Indicator
- (h) IR IN: IR signal input port



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

Made in China

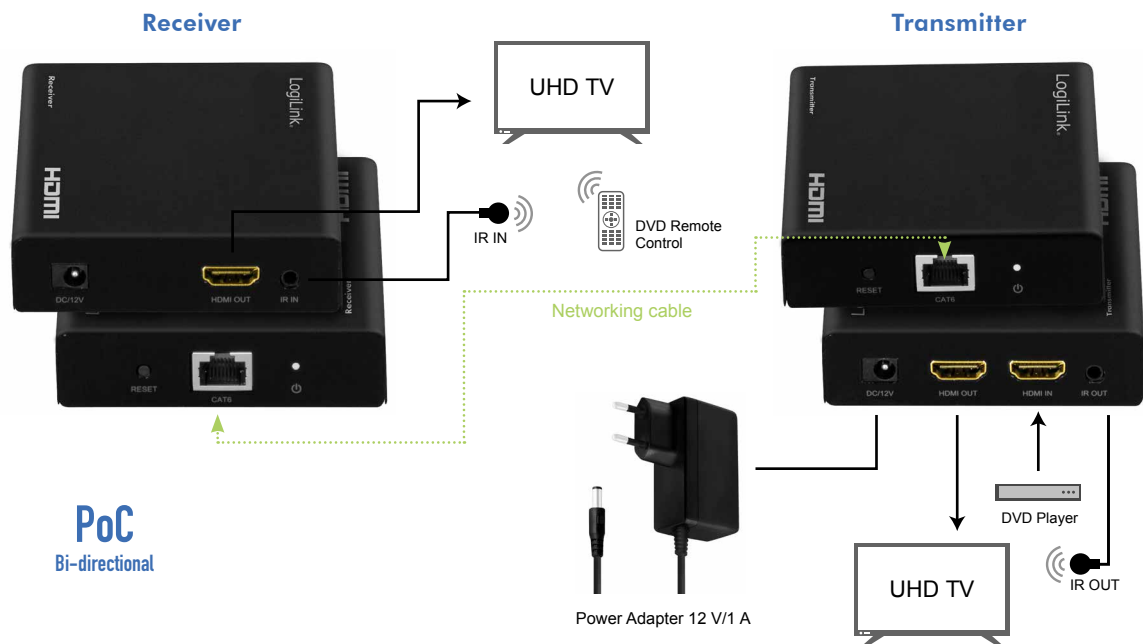

**PoC**  
Bi-directional

## Specifications:

Transmitter (TX) Interface	2x HDMI-A female, 1x DC power jack, 1x 3.5mm IR Jack, 1x RJ45 Jack
Receiver (RX) Interface	1x HDMI-A female, 1x DC power jack, 1x 3.5mm IR Jack, 1x RJ45 Jack
HDMI Version	2.0
HDCP Version	2.2
Working Distance	70 m
Output Resolution	480i/60 Hz, 576i/50 Hz, 1080i/50/60 Hz, 480p/60 Hz, 576p/50 Hz, 720p/50/60 Hz, 1080p/24/25/30/50/60 Hz, 4K@24/25/30 Hz, 4K@50/60 Hz 4:4:4
Video Bandwidth	6 Gbps/600 MHz
HDR (High-Dynamic Range)	Yes
DDC (Display Data Channel)	Yes
LED Indicator	Yes
Chassis Material	Metal
3D Supporting	Yes
IR Support	Yes
POC (Power Over Cable)	Yes, Bi-directional
HDMI Loop Out	Yes
Power Consumption	TX:1.3 W, RX:1.6 W
Power Supply	12 V/1 A
Uncompressed Audio	LPCM 7.1
Compressed Audio	DTS, Dolby Digital, DTS-HD Master Audio™, Dolby TrueHD
Networking Cable	Cat5E/6/7/8
Operating Temperature	0°C–70°C
Operating Humidity	10%–85% RH (no condensation)
Storage Temperature	-10°C–80°C
Storage Humidity	5%–90% RH (no condensation)
Dimensions	TX:10x8.8x2.3 cm ; RX:10x8.8x2.3 cm
Weight	TX:0.2 kg; RX:0.2 kg



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.



Made in China

### Specification of External Power Supply:

Input Voltage	100–240 V, 50/60 Hz 0.4 A max.
Output Power	12 V/1 A, 12 W
DC Plug	5.5x2.1 mm
Dimensions	70x21x76 mm
Cable Length	1.2 m
Weight	0.075 kg



### Package Contents:

- » 1x HDMI Extender Set
- » 1x IR TX Cable
- » 1x IR RX Cable
- » 4x Mounting Ears
- » 1x Power Adapter 12 V/1 A
- » 1x User Manual

### Package Information:

- » Packing Dimension: 243x196x60 mm
- » Packing Weight: 0.73 kg
- » Carton Dimension: 505x235x340 mm
- » Carton Q'ty: 10 pcs
- » Carton Weight: 7.9 kg



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.



Made in China