

D-Sub Connectors High Density, PCB Mounting, angled

Female Connectors with Threaded Bolt UNC 4/40



SPECIFICATION:

Operating Current (Nom.): 3 A
 Operating Temperature: -55°C to 105°C
 Insulation Resistance (Min.): 1000 MΩ
 Contact Resistance (Max.): 13 mΩ
 Dielectric Strength: 500 Vac

MATERIAL:




Material (Terminal): copper alloy, tin plated
 Material (Housing): steel, nickel plated
 Flammability Class: UL 94 V-0
 Material (Insulation): PBT
 Material (Contact Area): copper alloy, gold plated

HANDLING:



Processing: wave soldering
 Packaging: tray

TOLERANCE:

.X: ± 0.25
 .XX: ± 0.20

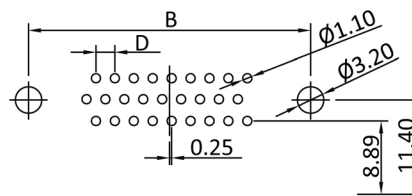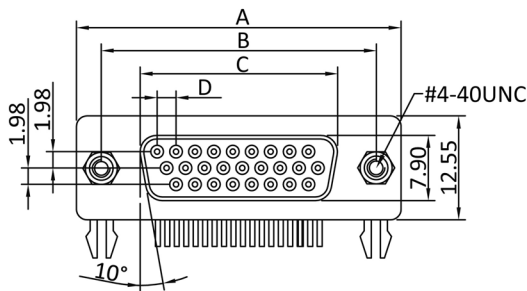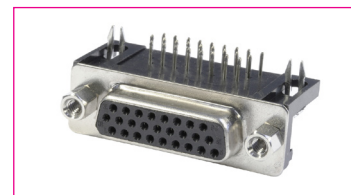

Recommended PCB Layout
(PCB Tolerance ±0.05)

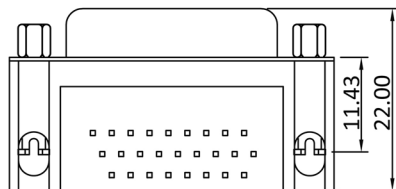

Dimensions

Number of Contacts:	A:	B:	C:	D:
15	30.81	24.99	16.33	2.29
26	39.14	33.32	24.66	2.29
44	53.04	47.04	38.38	2.29

Order Information

Identifier:	No. of Contacts:	Version:
BU	#	HDW
D-Sub High Density Female with solder pins	15: 15 poles 26: 26 poles 44: 44 poles	High Density angled