




## Dome-Top® Barb Ty Cable Ties – Nylon 6.6

- For indoor use
- Dome-top head features unique patented design with round, smooth edges
- Stainless steel locking barb provides consistent performance, reliability, and infinite adjustability through entire bundle range

- High strength and low thread force
- A variety of materials and colors are available for specific applications
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- UL Listed for use in plenum or air handling spaces per NEC

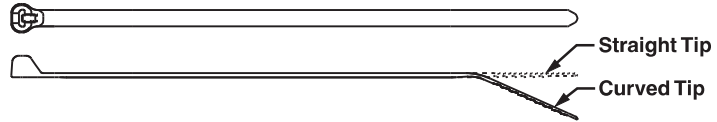

| Part Number  | Length |     | Width |     | Thickness |     | Max. Bundle Dia. |     | Min. Loop Tensile Str. |     | Recommended Installation Tool                          | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--|--------|-----|-------|-----|-----------|-----|------------------|-----|------------------------|-----|--|----------------|----------------|
|  | In.    | mm  | In.   | mm  | In.       | mm  | In.              | mm  | Lbs.                   | N   |  |                |                |
| <b>Miniature Cross Section – Plenum-Rated</b>                  |        |     |       |     |           |     |                  |     |                        |     |  |                |                |
| <b>BT1M-C</b>  | 4.0    | 102 | .095  | 2.4 | .036      | .9  | .90              | 23  | 18                     | 80  | GTS, GTSL, GS2B, PTS, PPTS, STS2                       | 100            | 1000           |
| <b>BT1.5M-C</b>  | 6.3    | 160 | .095  | 2.4 | .046      | 1.2 | 1.50             | 38  | 18                     | 80  |  | 100            | 1000           |
| <b>BT2M-C</b>  | 7.9    | 201 | .095  | 2.4 | .046      | 1.2 | 2.00             | 51  | 18                     | 80  |  | 100            | 1000           |
| <b>BT4M-C</b>  | 14.2   | 361 | .095  | 2.4 | .046      | 1.2 | 4.00             | 102 | 18                     | 80  |  | 100            | 1000           |
| <b>Intermediate Cross Section – Plenum-Rated</b>               |        |     |       |     |           |     |                  |     |                        |     |  |                |                |
| <b>BT1.5I-C</b>  | 6.1    | 155 | .141  | 3.6 | .041      | 1.0 | 1.50             | 38  | 40                     | 178 | GTS, GTSL, GS2B, PTS, PPTS, STS2                       | 100            | 1000           |
| <b>BT2I-C</b>  | 8.0    | 203 | .141  | 3.6 | .041      | 1.0 | 2.00             | 51  | 40                     | 178 |  | 100            | 1000           |
| <b>BT3I-C</b>  | 11.3   | 287 | .141  | 3.6 | .049      | 1.2 | 3.00             | 76  | 40                     | 178 |  | 100            | 1000           |
| <b>BT4I-C</b>  | 14.3   | 363 | .141  | 3.6 | .049      | 1.2 | 4.00             | 102 | 40                     | 178 |  | 100            | 1000           |
| <b>Standard Cross Section – Plenum-Rated</b>                   |        |     |       |     |           |     |                  |     |                        |     |  |                |                |
| <b>BT2S-C</b>  | 8.0    | 203 | .185  | 4.7 | .045      | 1.1 | 2.00             | 51  | 50                     | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 100            | 1000           |
| <b>BT3S-C</b>  | 12.0   | 305 | .185  | 4.7 | .052      | 1.3 | 3.00             | 76  | 50                     | 222 |  | 100            | 1000           |
| <b>BT4S-C</b>  | 15.1   | 384 | .185  | 4.7 | .052      | 1.3 | 4.00             | 102 | 50                     | 222 |  | 100            | 1000           |
| <b>Light-Heavy Cross Section (Straight Tip) – Plenum-Rated</b> |        |     |       |     |           |     |                  |     |                        |     |  |                |                |
| <b>BT2LH-L</b>   | 8.7    | 221 | .275  | 7.0 | .065      | 1.7 | 2.00             | 51  | 120                    | 534 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH                     | 50             | 500            |
| <b>BT3LH-L</b>   | 11.8   | 300 | .275  | 7.0 | .065      | 1.7 | 3.00             | 76  | 120                    | 534 |  | 50             | 500            |
| <b>BT4LH-L</b>   | 14.9   | 378 | .275  | 7.0 | .065      | 1.7 | 4.00             | 102 | 120                    | 534 |  | 50             | 500            |
| <b>BT5LH-L</b>   | 18.1   | 460 | .275  | 7.0 | .065      | 1.7 | 5.00             | 127 | 120                    | 534 |  | 50             | 500            |
| <b>BT6LH-L</b>   | 21.2   | 538 | .275  | 7.0 | .065      | 1.7 | 6.00             | 152 | 120                    | 534 |  | 50             | 500            |
| <b>BT7LH-L</b>   | 24.4   | 620 | .275  | 7.0 | .065      | 1.7 | 7.00             | 178 | 120                    | 534 |  | 50             | 500            |
| <b>BT8LH-L</b>   | 27.5   | 699 | .275  | 7.0 | .065      | 1.7 | 8.00             | 203 | 120                    | 534 |  | 50             | 500            |
| <b>BT9LH-L</b>   | 30.7   | 780 | .275  | 7.0 | .065      | 1.7 | 9.00             | 229 | 120                    | 534 |  | 50             | 500            |

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index