



MODEL: SP85-12(85AH/20HR)



Product Specification

Nominal Voltage: 12 V

Rated Capacity:

20Hour Rate (4.25A to 10.5V)	85 AH
10Hour Rate (1.40A to 10.5V)	80 AH
5Hour Rate (13.6A to 10.5V)	68 AH
2Hour Rate (28.0A to 10.5V)	56 AH

Dimension and Weight

Length	259mm±2mm
Width	168mm±2mm
Height	210mm±2mm
Total Height	217mm±2mm
Wright(WT)	27.5kg

Internal Resistance: Fully charged Battery ≤8 m Ω

Self discharge Rate:20°C, 4% first month, after 1% per month

Operating Temperature Range:

Discharge	-35°C(-31°F) ~50°C(122°F)
Charge	-15°C(5°F)~40°C(104°F)
Storage	-15°C(5°F)~40°C(104°F)

Charging Methods:

Floating Use	13.5V~13.8V(20°C),Compensation coefficient-3mv/cell/°C
Cycling Use	14.4V~15.0V(20°C),Compensation coefficient-5mv/cell/°C
Max Charge Current	0.3C(A)

Case ABS

Applications Electric Vehicle, Electric Slide Vehicle, Electric Golf Car, Solar Power, Wind Power, Telecom Systems, UPS

General Features

High Corrosion Resistart Performance:Pb-Ca multi-alloy grid Patented Silicate Compound Electrolyte:Minor acid vapor, environment friendly.


High Energy Density and Power Density.

Excellent Charge Acceptance Ability.



Strong High and Low Temperatare Performance.

Optimized Capability of Instant High-current Discharging

Outer Dimensions

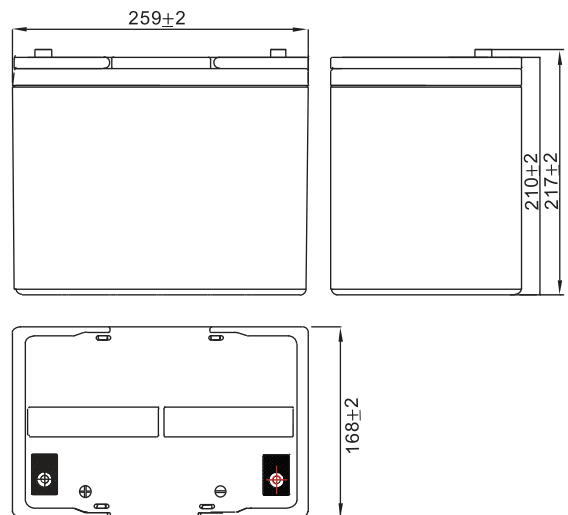


Terminal Type




**MODEL: SP85-12(85AH/20HR)**


Discharge Characteristic Curves

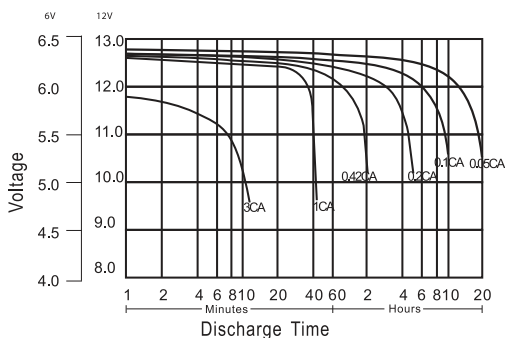


Constant Voltage Charging For Standby Use Batteries

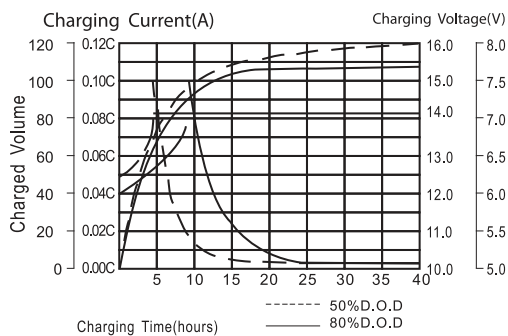


Self-Discharge Characteristics

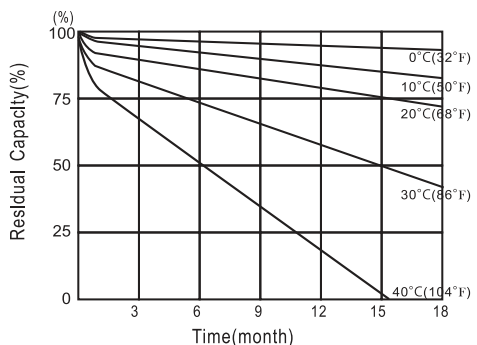


Cycle Service Life

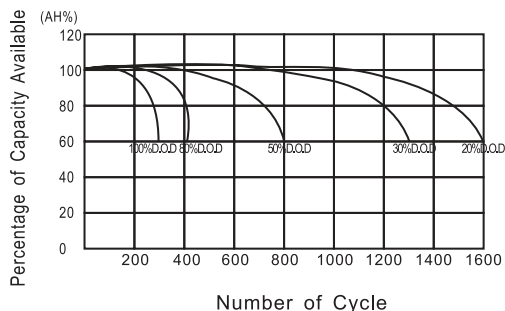


Effect of Temperature on Capacity

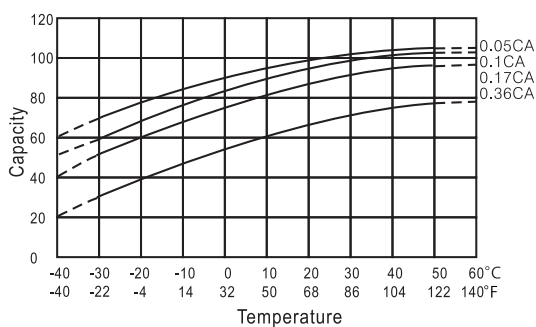

Float Service Life

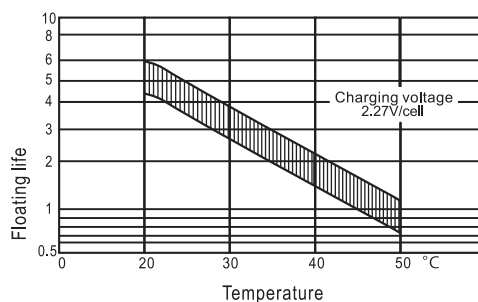

Open-Circuit Voltage and Residual Capacity

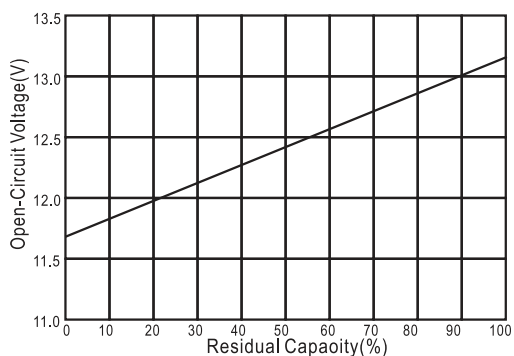

Charge Curves

