

**Female Headers
Pitch 2.54 mm, angled**

Double row, height 8.5 mm



SPECIFICATION:

Operating Current (Nom.):	3 A
Operating Temperature:	-40°C to 105°C
Insulation Resistance (Min.):	1000 MΩ
Contact Resistance (Max.):	20 mΩ
Dielectric Strength:	1,000 Vac

MATERIAL:






Material (Housing):	PBT
Flammability Class:	UL 94 V-0
Material (Contact Area):	copper alloy, gold plated

HANDLING:

Processing:	wave soldering
Packaging:	tray

TOLERANCE:

.X:	± 0.25
.XX:	± 0.20

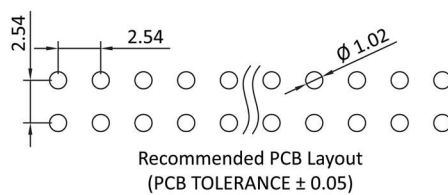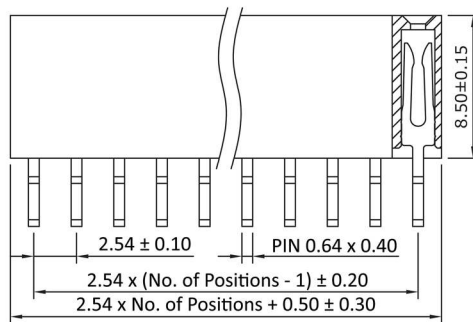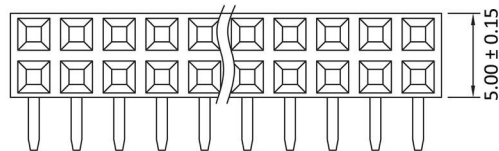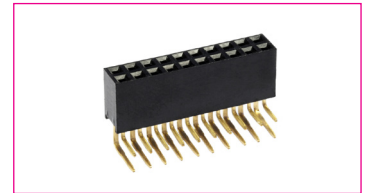

Order Information

Identifier:	Version:	No. of Contacts:
BL	W	#
Female header pitch 2.54 mm double row	angled	2X2: 2 x 2
		2X3: 2 x 3
		2X4: 2 x 4
		:
		2X40: 2 x 40