

C87 Series, Cylindrical Aluminum Case, Overpressure Protection, 420 VAC/470 VAC

Overview

Polypropylene metallized film with cylindrical aluminium can type filled with resin; faston, plastic deck or cable terminals and overpressure safety device.

Applications

Typical applications include motor run P2 safety class: single-phase motors, low power electric motors and compressors.

Benefits


- Self-healing
- VDE, CQC and UL810 approved
- Rated frequency of 50 Hz and 60 Hz
- High capacitance density
- Safety device protection



Part Number System

| C87 | 8 | B | F | 3 | 4300 | AA | 4 | J |
|----------------------------|---|--|--|--|---|---------------|--------------------------|---|
| Series | Marking | Case & Fixing Bolt Code | Terminal Style | Capacitance Code (pF) | Packaging | Internal Use | Tolerance | |
| C87 = Motor Run Capacitors | 0 = 10,000 hours/420 VAC (Class B) or 3,000 hours/470 VAC (Class C) 8 = 30,000 hours/420 VAC (Class A) or 10,000 hours/470 VAC (Class B) | C870: C = Standard D = UL Z = Special C878: A = Standard B = UL Z = Special | F = Cylindrical aluminum can with M8 bolt G = Cylindrical aluminum can with M12 bolt E = Without fixing bolt/flat bottom | 1 = Single faston 2.8 x 0.8 (hole) 2 = Single faston 6.3 x 0.8 3 = Double faston 6.3 x 0.8 4 = Single faston 2.8 x 0.8 (slot) 5 = Single faston 2.8 x 0.5 (hole) | Digits 2-4 indicate the first three digits of the capacitance value. First digit indicates the number of zeros to be added. | AA = Standard | 0, 1, 2, 4, 5 = Standard | J = 5% K = 10% R = 0 to +10% X = Special tolerance |

Dimensions – Millimeters

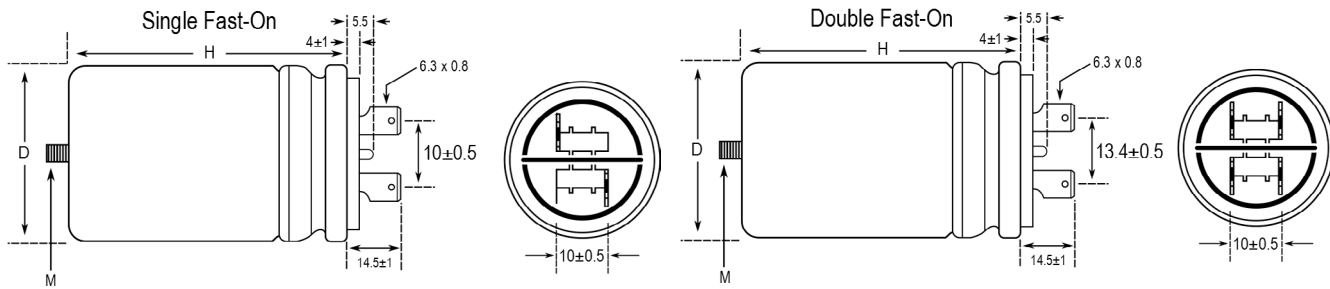

| D | H | Mounting Stud (M) |
|-------|-----|-------------------|
| +1/-0 | ±2 | |
| 25 | 48 | M8 x 10 |
| 25 | 60 | M8 x 10 |
| 25 | 78 | M8 x 10 |
| 30 | 48 | M8 x 10 |
| 30 | 60 | M8 x 10 |
| 30 | 78 | M8 x 10 |
| 35 | 48 | M8 x 10 |
| 35 | 60 | M8 x 10 |
| 35 | 78 | M8 x 10 |
| 35 | 98 | M8 x 10 |
| 40 | 78 | M8 x 10 |
| 40 | 98 | M8 x 10 |
| 45 | 78 | M8 x 10 |
| 45 | 98 | M8 x 10 |
| 45 | 133 | M8 x 10 |
| 50 | 133 | M12 x 12.5 |
| 55 | 133 | M12 x 12.5 |
| 60 | 98 | M12 x 12.5 |
| 60 | 133 | M12 x 12.5 |

Performance Characteristics

| Type of Service | Continuous |
|--|---|
| Operating Class | |
| C87/8 | Class B 10,000 hours at 470 VAC, Class A 30,000 hours at 420 VAC |
| C87/0 | Class B 10,000 hours at 420 VAC, Class C 3,000 hours at 470 VAC |
| C87/1 | None |
| C87/5 | None |
| Temperature Range | -25 to +85°C |
| Rated Voltage | 470 VAC |
| Rated Frequency | 50 – 60 Hz |
| Voltage Rise/Fall Time (Maximum) | 0 = 15 V/μs 8 = 20 V/μs |
| Maximum Permissible Voltage | 1.10 x rated voltage |
| Maximum Permissible Current | 1.30 x rated current |
| Dissipation Factor (DF) | 20×10^{-4} at +20°C, 50Hz |
| Safety Class | P2 |
| Maximum Altitude | 2,000 m |
| Capacitance Tolerance | ±5% |
| Mounting | Any position |
| Case | Aluminium |
| Disk | Thermoplastic Polymer V0 (UL 94) Plastic deck with: - self-extinguishing features V0 (UL94) - GWT–GWFI–GWIT value in conformity with the Standard IEC60335-1 ed.4 par.30/EN60335-1 ed.3 par.30 |
| Filling Resin | Polyurethane |
| Dielectric | Polypropylene |
| Plates | Self-healing metal layer |
| Test Voltage Terminal to Terminal (V_{TT}) | $2 V_n$ for 2 seconds |
| Test Voltage Terminal to Can (V_{TC}) | 2,000 V for 2 seconds |
| Total Harmonic Distortion | Up to 10% |
| Fire Load | 40 MJ/kg |
| Air Distance Between Live Parts | ≥ 5 mm |
| Air Distance Between Live Parts and Case | ≥ 6 mm |
| Vibration Test | IEC 68-2-6 |
| Maximum Tightening Torque | 5 Nm (M8), 10 Nm (M12) |

Table 1 – Ratings & Part Number Reference


| Capacitance Value (µF) | VAC | Maximum Dimensions in mm | | dV/dt (V/µs) | Termination | Part Number |
|------------------------|-----|--------------------------|--------|--------------|----------------|-----------------|
| | | D | H | | | |
| 16 | 470 | 40 | 78 | 15 | Double Fast-On | C870CF35160AA1J |
| 18 | 470 | 40 | 78 | 15 | Double Fast-On | C870CF35180AA0J |
| 20 | 470 | 35 | 98 | 15 | Double Fast-On | C870CF35200AA0J |
| 20 | 470 | 35 | 98 | 15 | Double Fast-On | C870CF35200AA1J |
| 22 | 470 | 40 | 78 | 15 | Double Fast-On | C870CF35220AA0J |
| 25 | 470 | 45 | 78 | 15 | Double Fast-On | C870CF35250AA0J |
| 25 | 470 | 40 | 98 | 15 | Double Fast-On | C870CF35250AA1J |
| 30 | 470 | 40 | 98 | 15 | Double Fast-On | C870CF35300AA1J |
| 35 | 470 | 45 | 98 | 15 | Double Fast-On | C870CF35350AA0J |
| 40 | 470 | 45 | 98 | 15 | Double Fast-On | C870CF35400AA0J |
| 45 | 470 | 45 | 133 | 15 | Double Fast-On | C870CF35450AA0J |
| 50 | 470 | 50 | 133 | 15 | Double Fast-On | C870CG35500AA1J |
| 60 | 470 | 60 | 98 | 15 | Double Fast-On | C870CG35600AA5J |
| 70 | 470 | 55 | 133 | 15 | Double Fast-On | C870CG35700AA1J |
| 75 | 470 | 60 | 133 | 15 | Double Fast-On | C870CG35750AA0J |
| 75 | 470 | 50 | 133 | 15 | Double Fast-On | C870CG35750AA2J |
| 80 | 470 | 50 | 133 | 15 | Double Fast-On | C870CG35800AA2J |
| 100 | 470 | 55 | 133 | 15 | Double Fast-On | C870CG36100AA0J |
| 100 | 470 | 55 | 133 | 15 | Double Fast-On | C870CG36100AA0K |
| 100 | 470 | 60 | 133 | 15 | Double Fast-On | C870CG36100AA1J |
| 110 | 470 | 60 | 133 | 15 | Double Fast-On | C870CG36110AA0J |
| 1 | 450 | 30 | 48 | 20 | Double Fast-On | C878BF34100SA4J |
| 1.5 | 450 | 30 | 48 | 20 | Double Fast-On | C878BF34150SA4J |
| 1.8 | 450 | 30 | 48 | 20 | Double Fast-On | C878ZF34180SA0J |
| 2 | 450 | 30 | 48 | 20 | Double Fast-On | C878BF34200SA0J |
| 2.5 | 450 | 30 | 48 | 20 | Double Fast-On | C878BF34250SA4J |
| 3 | 450 | 30 | 48 | 20 | Double Fast-On | C878BF34300SA4J |
| 3.5 | 450 | 35 | 48 | 20 | Double Fast-On | C878BF34350SA4J |
| 4 | 450 | 35 | 48 | 20 | Double Fast-On | C878BF34400SA0J |
| 5 | 450 | 30 | 60 | 20 | Double Fast-On | C878BF34500SA0J |
| 6 | 450 | 30 | 78 | 20 | Double Fast-On | C878BF34600SA0J |
| 7.5 | 450 | 30 | 78 | 20 | Double Fast-On | C878BF34750SA0J |
| 8 | 450 | 30 | 78 | 20 | Double Fast-On | C878BF34800SA0J |
| 10 | 450 | 35 | 78 | 20 | Double Fast-On | C878BF35100SA0J |
| 11 | 450 | 35 | 78 | 20 | Double Fast-On | C878BF35110SA0J |
| 12 | 450 | 35 | 78 | 20 | Double Fast-On | C878BF35120SA0J |
| 15 | 450 | 40 | 78 | 20 | Double Fast-On | C878BF35150SA0J |
| 16 | 450 | 40 | 78 | 20 | Double Fast-On | C878BF35160SA0J |
| 20 | 450 | 45 | 78 | 20 | Double Fast-On | C878BF35200SA0J |
| 23 | 450 | 45 | 78 | 20 | Double Fast-On | C878BF35230SA0J |
| 25 | 450 | 45 | 98 | 20 | Double Fast-On | C878BF35250SA0J |
| 29 | 450 | 45 | 98 | 20 | Double Fast-On | C878BF35290SA0J |
| 30 | 450 | 45 | 98 | 20 | Double Fast-On | C878BF35300SA0J |
| 46 | 450 | 45 | 133 | 20 | Double Fast-On | C878BF35460SA0J |
| 50 | 450 | 50 | 133 | 20 | Double Fast-On | C878BF35500SA0J |
| 55 | 450 | 50 | 133 | 20 | Double Fast-On | C878BF35550SA0J |
| 60 | 450 | 50 | 133 | 20 | Double Fast-On | C878BF35600SA0J |
| 8 | 470 | 30 | 78 | 20 | Single Fast-On | C878AF24800AA0J |
| 8 | 470 | 35 | 78 | 20 | Single Fast-On | C878AF24800AA1J |
| 10 | 470 | 35 | 78 | 20 | Single Fast-On | C878AF25100AA0J |
| 12 | 470 | 35 | 78 | 20 | Single Fast-On | C878AF25120AA0J |
| 12 | 470 | 40 | 78 | 20 | Single Fast-On | C878AF25120AA1J |
| 16 | 470 | 40 | 78 | 20 | Single Fast-On | C878AF25160AA0J |
| 16 | 470 | 40 | 98 | 20 | Single Fast-On | C878AF25160AA1J |
| 20 | 470 | 45 | 78 | 20 | Single Fast-On | C878AF25200AA0J |
| 25 | 470 | 45 | 98 | 20 | Single Fast-On | C878AF25250AA0J |
| 30 | 470 | 45 | 98 | 20 | Single Fast-On | C878AF25300AA0J |
| 40 | 470 | 45 | 133 | 20 | Single Fast-On | C878AF25400AA0J |
| 1 | 470 | 30 | 48 | 20 | Double Fast-On | C878AF34100AA4J |
| 2 | 470 | 30 | 48 | 20 | Double Fast-On | C878AF34200AA4J |
| 2.5 | 470 | 30 | 48 | 20 | Double Fast-On | C878AF34250AA4J |
| Capacitance Value (µF) | VAC | B (mm) | H (mm) | dV/dt (V/µs) | Termination | Part Number |

Table 1 – Ratings & Part Number Reference cont'd


| Capacitance Value (μF) | VAC | Maximum Dimensions in mm | | dV/dt ($\text{V}/\mu\text{s}$) | Termination | Part Number |
|---|------------|--------------------------|---------------|--|--------------------|--------------------|
| | | D | H | | | |
| 3 | 470 | 30 | 48 | 20 | Double Fast-On | C878AF34300AA4J |
| 3.5 | 470 | 35 | 48 | 20 | Double Fast-On | C878AF34350AA4J |
| 4 | 470 | 35 | 48 | 20 | Double Fast-On | C878AF34400AA4J |
| 5 | 470 | 35 | 48 | 20 | Double Fast-On | C878AF34500AA4J |
| 6 | 470 | 30 | 78 | 20 | Double Fast-On | C878AF34600AA0J |
| 6 | 470 | 35 | 78 | 20 | Double Fast-On | C878AF34600AA1J |
| 7.5 | 470 | 30 | 78 | 20 | Double Fast-On | C878AF34750AA0J |
| 7.5 | 470 | 35 | 60 | 20 | Double Fast-On | C878AF34750AA2J |
| 8 | 470 | 30 | 78 | 20 | Double Fast-On | C878AF34800AA0J |
| 9 | 470 | 35 | 78 | 20 | Double Fast-On | C878AF34900AA0J |
| 10 | 470 | 35 | 78 | 20 | Double Fast-On | C878AF35100AA0J |
| 11 | 470 | 35 | 78 | 20 | Double Fast-On | C878AF35110AA0J |
| 12 | 470 | 35 | 78 | 20 | Double Fast-On | C878AF35120AA0J |
| 12 | 470 | 40 | 78 | 20 | Double Fast-On | C878AF35120AA1J |
| 12.5 | 470 | 35 | 78 | 20 | Double Fast-On | C878AF35125AA0J |
| 14 | 470 | 40 | 78 | 20 | Double Fast-On | C878AF35140AA0J |
| 15 | 470 | 40 | 78 | 20 | Double Fast-On | C878AF35150AA0J |
| 16 | 470 | 40 | 78 | 20 | Double Fast-On | C878AF35160AA0J |
| 16 | 470 | 40 | 98 | 20 | Double Fast-On | C878AF35160AA1J |
| 16 | 470 | 35 | 98 | 20 | Double Fast-On | C878AF35160AA2J |
| 18 | 470 | 45 | 78 | 20 | Double Fast-On | C878AF35180AA0J |
| 20 | 470 | 45 | 78 | 20 | Double Fast-On | C878AF35200AA0J |
| 22.5 | 470 | 45 | 78 | 20 | Double Fast-On | C878AF35225AA0J |
| 25 | 470 | 45 | 98 | 20 | Double Fast-On | C878AF35250AA0J |
| 30 | 470 | 45 | 98 | 20 | Double Fast-On | C878AF35300AA0J |
| 30 | 470 | 45 | 133 | 20 | Double Fast-On | C878AF35300AA1J |
| 31.5 | 470 | 45 | 98 | 20 | Double Fast-On | C878AF35315AA0J |
| 35 | 470 | 45 | 133 | 20 | Double Fast-On | C878AF35350AA0J |
| 40 | 470 | 45 | 133 | 20 | Double Fast-On | C878AF35400AA0J |
| 40 | 470 | 50 | 133 | 20 | Double Fast-On | C878AG35400AA2J |
| 45 | 470 | 50 | 133 | 20 | Double Fast-On | C878AG35450AA0J |
| 50 | 470 | 50 | 133 | 20 | Double Fast-On | C878AG35500AA0J |
| 50 | 470 | 55 | 133 | 20 | Double Fast-On | C878AG35500AA1J |
| 55 | 470 | 50 | 133 | 20 | Double Fast-On | C878AG35550AA0J |
| 60 | 470 | 50 | 133 | 20 | Double Fast-On | C878AG35600AA0J |
| 60 | 470 | 60 | 133 | 20 | Double Fast-On | C878AG35600AA1J |
| 80 | 470 | 60 | 133 | 20 | Double Fast-On | C878AG35800AA0J |
| Capacitance Value (μF) | VAC | B (mm) | H (mm) | dV/dt ($\text{V}/\mu\text{s}$) | Termination | Part Number |

Expected Life Hours

C878

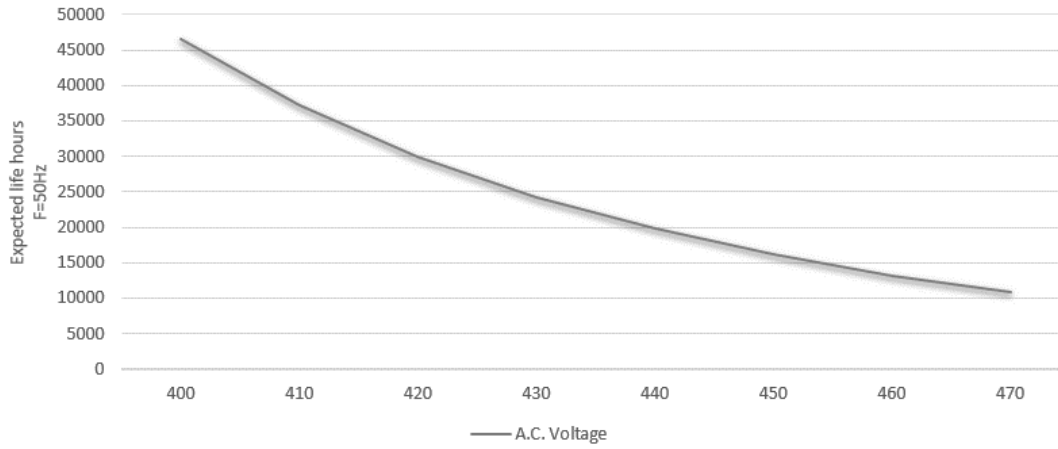

C870

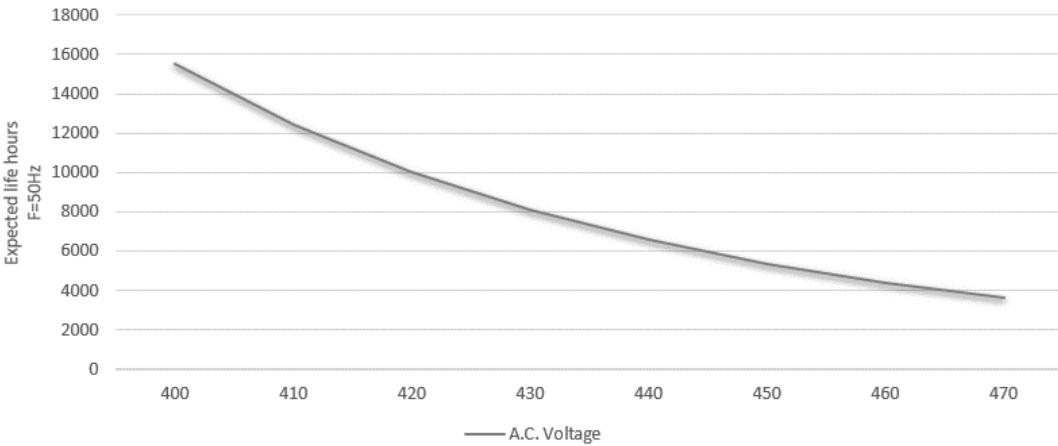

Marking

| | | | |
|-----------------------|------------------------|------------|---------------------------------------|
| A | C.87.8BF3 MKP | X | → MKP C87 |
| | $X_{\mu F} \pm 5\%$ P2 | | → Capacitance Tolerance/Safety Class |
| 420V~30000h/Class A | | D'E | → Capacitor Class |
| 470V~10000h/Class B | | | → Climate Class |
| EN60252-1 -25/85/21 | | | |
| 450VAC 60Hz -25..70°C | us | | → Rated Voltage based on UL Standards |
| PROTECTED 10000AFC | C22.2no.190 Tamb≤46°C | | → UL Approvals |
| NO PCBs | SH | CE | → Self-Healing dielectric |
| B F8 28BC 10:44 | | | → Data Code |

Dissipation Factor

Dissipation factor is a complex function involved with the inefficiency of the capacitor. The $\text{tg}\delta$ may change up and down with increased temperature. For more information, please refer to Performance Characteristics.

Sealing

Hermetically Sealed Capacitors

When the temperature increases, the pressure inside the capacitor increases. If the internal pressure is high enough, it can cause a breach in the capacitor which can result in leakage, impregnation, filling fluid or moisture susceptibility.

Resin Encased/Wrap & Fill Capacitors

The resin seals on resin encased and wrap and fill capacitors will withstand short-term exposure to high humidity environments without degradation. Resins and plastic tapes will form a pseudo-impervious barrier to humidity and chemicals. These case materials are somewhat porous and through osmosis can cause contaminants to enter the capacitor. The second area of contaminated absorption is the lead-wire/resin interface. Since resins cannot bond 100% to tinned wires, there can be a path formed up to the lead wire into the capacitor section. Aqueous cleaning of circuit boards can aggravate this condition.

Barometric Pressure

The altitude at which hermetically sealed capacitors are operated controls the voltage rating of the capacitor. As the barometric pressure decreases, the susceptibility to terminal arc-over increases. Non-hermetic capacitors can be affected by internal stresses due to pressure changes. This can be in the form of capacitance changes or dielectric arc-over as well as low insulation resistance. Heat transfer can also be affected by altitude operation. Heat generated in operation cannot be dissipated properly and can result in high R12 losses and eventual failure.

Radiation

Radiation capabilities of capacitors must be taken into consideration. Electrical degradation in the form of dielectric embitterment can take place causing shorts or opens.

Environmental Compliance

As an environmentally conscious company, KEMET is working continuously with improvements concerning the environmental effects of both our capacitors and the production of them.

In Europe (RoHS Directive) and in some other geographical areas like China, legislation has been put in place to prevent the use of some hazardous materials, like Lead (Pb), in electronic equipment. All products in this catalog are produced to help our customers' obligations to guarantee their products to fulfill these legislative requirements. The only material of concern in our products has been Lead (Pb), which has been removed from all designs to fulfill the requirement of containing less than 0.1% of Lead in any homogeneous material.

KEMET will closely follow any changes in legislation world wide and makes any necessary changes in its products, whenever needed. Some customer segments like Medical, Military and Automotive Electronics may still require the use of Lead in electrode coatings. To clarify the situation and distinguish products from each other, a special symbol is used on the packaging labels for RoHS compatible capacitors.

Because of customer requirements there may appear additional markings like LF = Lead Free or LFW = Lead Free Wires on the label.

Materials & Environment

The selection of materials used by KEMET for the production of capacitors is the result of extensive experience and constant attention to environmental protection. KEMET selects its suppliers according to ISO 9001 standards and carries out statistical analysis on the materials purchased before acceptance. All materials are, to the company's present knowledge, non-toxic and free from Cadmium, Mercury, Chrome and compounds, PCB (Polychlorine Triphenyl), Bromide and Chlorine Dioxins Bromurate Chlorurate, CFC and HCFC and Asbestos.

Green Products

All KEMET power film products are ROHS Compliant.

Insulation Resistance

When the capacitor temperature increases, the insulation resistance decreases. This is due to increased electron activity. Low insulation resistance can also be the result of moisture trapped in the windings, caused by a prolonged exposure to excessive humidity.

KEMET Corporation World Headquarters

2835 KEMET Way
Simpsonville, SC 29681

Mailing Address:
P.O. Box 5928
Greenville, SC 29606

www.kemet.com
Tel: 864-963-6300
Fax: 864-963-6521

Corporate Offices
Fort Lauderdale, FL
Tel: 954-766-2800

North America

Northeast
Wilmington, MA
Tel: 978-658-1663

Southeast
Lake Mary, FL
Tel: 407-855-8886

Central
Novi, MI
Tel: 248-994-1030

Irving, TX
Tel: 972-915-6041

West
Milpitas, CA
Tel: 408-433-9950

Mexico
Guadalajara, Jalisco
Tel: 52-33-3123-2141

Europe

Southern Europe
Sasso Marconi, Italy
Tel: 39-051-939111

Skopje, Macedonia
Tel: 389-2-55-14-623

Central Europe
Landsberg, Germany
Tel: 49-8191-3350800

Kamen, Germany
Tel: 49-2307-438110

Northern Europe
Wyboston, United Kingdom
Tel: 44-1480-273082

Espoo, Finland
Tel: 358-9-5406-5000

Asia

Northeast Asia
Hong Kong
Tel: 852-2305-1168

Shenzhen, China
Tel: 86-755-2518-1306

Beijing, China
Tel: 86-10-5877-1075

Shanghai, China
Tel: 86-21-6447-0707

Seoul, South Korea
Tel: 82-2-6294-0550

Taipei, Taiwan
Tel: 886-2-27528585

Southeast Asia
Singapore
Tel: 65-6701-8033

Penang, Malaysia
Tel: 60-4-6430200

Bangalore, India
Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.

Prototype Sample Disclaimer

The Customer acknowledges the following limitations of the prototype samples:

- (1) Prototype samples are manufactured from preliminary designs and manufacturing processes; may not represent final designs; have not been released for commercial use and are not subject to the same quality control procedures applicable to released products.*
- (2) Prototype samples are not qualified parts and are provided "as-is" by KEMET Electronics Corporation, which specifically disclaims any and all warranties and guarantees, explicit or implied, including, without limitation, the warranties of merchantability and fitness for a particular purpose or use.*
- (3) Prototype samples are not intended for commercial use; are provided for engineering evaluation only and are not recommended for use in the Customer's production line.*
- (4) The Customer assumes the risk of any and all uses that the Customer makes of the prototype samples.*

General Disclaimer

"All product specifications, statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application.

KEMET's product warranty is set forth at www.kemet.com under Terms and Conditions of Sale."