A
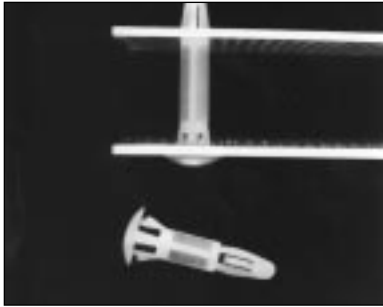
CRLCBSR Series
Cupped Reverse Locking Circuit Board Support, Round Hole

Features
- Cupped head provides tight holding in a chassis with a wide tolerance

TO SNAP−LOCK IN A .157 ±.003 (4.0 ±0.08) DIA. HOLE, IN A .063 (1.6) NOMINAL THICK BOARD

.39 (10)

"A"

.06 (1.5) REF.

.39 (10)

TO SNAP−LOCK IN A .236 ±.003 (6.0 ±0.08) DIA. HOLE, IN A .031 TO .047 (0.8 TO 1.2) PANEL THICKNESS

Part No.	Standard Pack: 1000 per bag
	"A" ± .015 (0.4)
CRLCBSR-3-01	3/16 (4.8)
CRLCBSR-4-01	1/4 (6.4)
CRLCBSR-5-01	5/16 (7.9)
CRLCBSR-6-01	3/8 (9.5)
CRLCBSR-8-01	1/2 (12.7)
CRLCBSR-12-01	3/4 (19.1)

Material: Nylon 6/ 6, RMS-01
Color: Natural

Part available in V-0 material by special order. To order, replace -01 with -19.

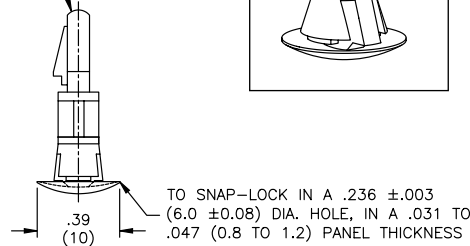**Part available in black by special order. To order, use part number CRLCBSR-XX-XX-B.**

CRLCBSRE Series
Cupped Reverse Lock Circuit Board Support, Round Hole

TO SNAP−LOCK IN A .157 ±.003 (4.0 ±0.08) DIA. HOLE, IN A .063 (1.6) NOMINAL THICK BOARD

.40 (10.2)

"A"

.06 (1.5) REF.

.50 (12.7)

TO SNAP−LOCK IN A .213 ±.003 (5.4 ±0.08) DIA. HOLE, IN A .047 TO .079 (1.2 TO 2.0) PANEL THICKNESS

Part No.	Standard Pack: 1000 per bag
	"A" ± .015 (0.4)
CRLCBSRE-4-01	1/4 (6.4)
CRLCBSRE-6-01	3/8 (9.5)
CRLCBSRE-8-01	1/2 (12.7)
CRLCBSRE-10-01	5/8 (15.9)

Material: Nylon 6/ 6, RMS-01
Color: Natural

Part available in V-0 material by special order. To order, replace -01 with -19.

Part available in black by special order. To order, use part number CRLCBSRE-XX-XX-B.

RLCBSK/RLCBSK2 Series
Reverse Locking Circuit Board Support, Pronged Round Hole - Metric
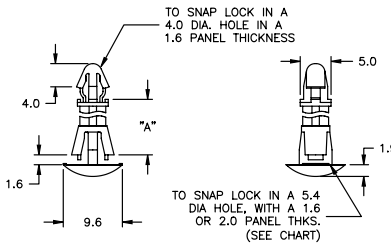
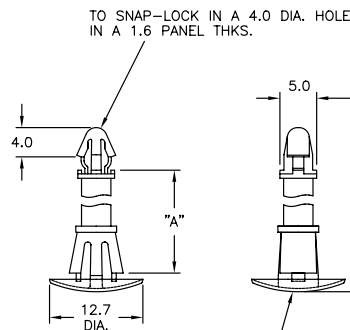TO SNAP LOCK IN A 4.0 DIA. HOLE IN A 1.6 PANEL THICKNESS

4.0

1.6

9.6

5.0

"A"

1.9

TO SNAP LOCK IN A 5.4 DIA HOLE, WITH A 1.6 OR 2.0 PANEL THKS. (SEE CHART)

Part No.	Standard Pack: 1000 per bag
Panel 1.6 mm	"A" ± 0.4 mm
RLCBSK-6-01	6.0 mm
RLCBSK-8-01	8.0 mm
RLCBSK-10-01	10.0 mm
RLCBSK-12-01	12.0 mm
Panel 2.0 mm	"A" ± 0.4 mm
RLCBSK-2-6-01	6.0 mm
RLCBSK-2-8-01	8.0 mm
RLCBSK-2-10-01	10.0 mm
RLCBSK-2-12-01	12.0 mm

Material: Nylon 6/ 6, RMS-01
Color: Natural

CRLCBSK-2 Series
Cupped Reverse Locking Circuit Board Support Metric

TO SNAP−LOCK IN A 4.0 DIA. HOLE IN A 1.6 PANEL THKS.

4.0

5.0

"A"

1.7

12.7 DIA.

TO SNAP LOCK INTO A ø5.40±0.075 mm HOLE IN A 1.0 mm TO 1.6 mm THICK CHASSIS

Part No.	Standard Pack: 1000 per bag
	"A" ± 0.4 mm
CRLCBSK-2-8-01	8 mm
CRLCBSK-2-10-01	10 mm
CRLCBSK-2-12-01	12 mm
CRLCBSK-2-14-01	14 mm

Material: Nylon 6/ 6, RMS-01
Color: Natural

Part available in V-0 material by special order. To order, replace -01 with -19.

RLCBSRS Series
Reverse Locking Circuit Board Support, Round Hole Standoff

3/8 (9.5)

11/64 (4.4)

"A"

.06 (1.5)

TO SNAP−LOCK IN A .187 ±.003 (4.75 ±0.08) DIA. HOLE, IN A .059 (1.50) TO .063 (1.60) THICK PANEL/CHASSIS

Part No.	Standard Pack: 1000 per bag
	"A" ± .015 (0.4)
RLCBSRS-4-01	1/4 (6.4)
RLCBSRS-5-01	5/16 (7.9)
RLCBSRS-6-01	3/8 (9.5)
RLCBSRS-7-01	7/16 (11.1)
RLCBSRS-8-01	1/2 (12.7)
RLCBSRS-9-01	9/16 (14.3)
RLCBSRS-10-01	5/8 (15.9)

Material: Nylon 6/ 6, RMS-01
Color: Natural

Part available in V-0 material by special order. To order, replace -01 with -19.

Features
- Supports heavy loaded PC boards; often used with Richco RLCBSR Series

---