



海宝摩打厂有限公司 HOI PO MOTOR FACTORY LIMITED

For Reference Only
仅供参考

产品规格书




MOTOR MODEL(摩打型号): F-10-16783-3(CN11518-1)强磁 DV

MOTOR OUTLINES(摩打结构图):

Print Date: 04/12/2017


MOTOR PHOTO:

DIRECTION OF ROTATION

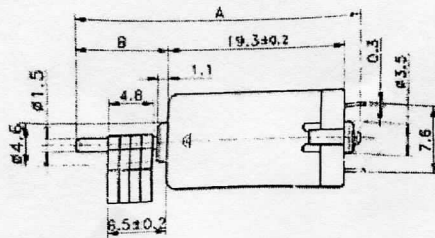

WEIGHT: 10g (APPROX)

UNIT: mm



LENGTH OF PRODUCT(产品总长)(A): 31.0mm (±0.1)	FRONT EXTENSION(前端)(B): 10.0mm (±0.5)
---	---------------------------------------

MOTOR TECHNICAL DATA(摩打技术数据): Remark: Data mark with * are average value(备注: 带有*号的数据为平均数值)

MODEL 型号	VOLTAGE(电压)		RATED LOAD(额定负载)		STALL (堵转)		
	OPERATING RANGE 操作范围	NOMINAL 额定电压	SPEED 转速 rpm	CURRENT 电流 A	TORQUE 扭力 mN.m g.cm		CURRENT 电流 A
F-10-16783-3	1.0-2.0V	1.5V	* 7000	* 0.42	—	—	* 1.2
GENERAL TEST TOLERANCE 正常测试公差			±15%	0.55MAX 最大值	—	—	1.4MAX 最大值

Standard Testing Condition(标准测试条件):

Temperature 20±5°C, relative humidity 65±15% | Parameters should be measured after motor has been running for 20 seconds

温度 20±5°C, 相对湿度 65±15% | 马达参数必需于马达运作 20 秒后才可以进行测试

备注: 额定负载为带偏心铰 R6.0*4.8mm (1.2*4片)

PRODUCE BY(制作人): INSPECT BY(审核人): CONFIRM BY(确认人):