


Specification

Housing	High Temperature Thermoplastics, UL94V-0
Color	Gray
Contact	Copper Alloy
Shell	Copper Alloy
Voltage Current Rating	1 AMP, 30V AC
Insulation Resistance	100MΩ Min.
Contact Resistance	50 mΩ Max.
Dielectric Withstanding Voltage	100V AC
Temperature Range	-50°C to +85°C

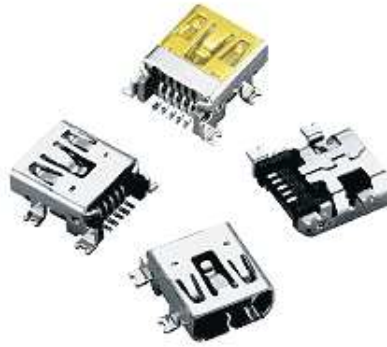


Order Information

AU8 - * * - 005 K 0


Terminal Plating
7:Sn 100 μ"
C: Au 3 μ"

E: With Tape
P: Without Tape


Detail Drawing

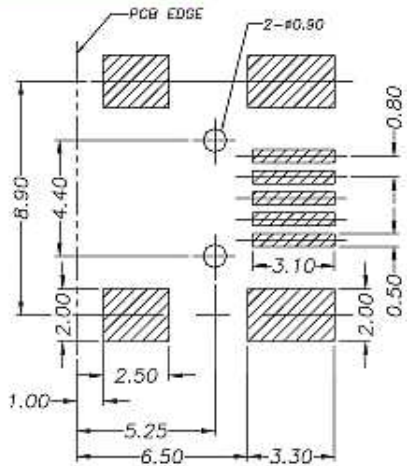

RECOMMENDED PCB LAYOUT
(PCB t=0.8)

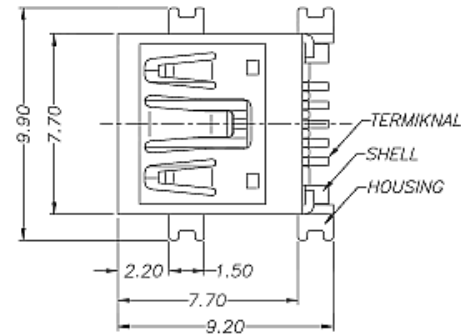

WITH TAPE

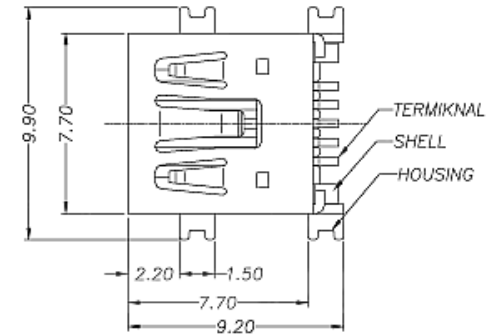

WITHOUT TAPE

