


Contact Strips
Pitch 2.54 mm, straight

Machine Pins, double row, height 7.0 mm



SPECIFICATION:

Operating Voltage (Max.): 60 V
 Operating Current (Nom.): 3 A
 Operating Temperature: -40°C to 105°C
 Insulation Resistance (Min.): 1000 MΩ
 Contact Resistance (Max.): 4 mΩ
 Dielectric Strength: 500 Vac

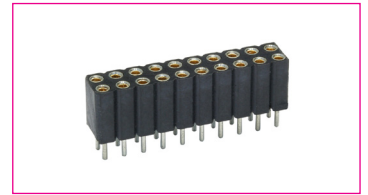

MATERIAL:





Material (Terminal): brass, tin plated
 Material (Housing): PPS
 Flammability Class: UL 94 V-0
 Material (Contact Area): beryllium copper, gold plated

HANDLING:

Processing: wave soldering
 Packaging: tube

TOLERANCE:

.X: ± 0.25
 .XX: ± 0.20

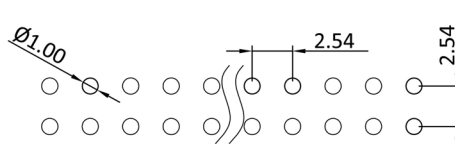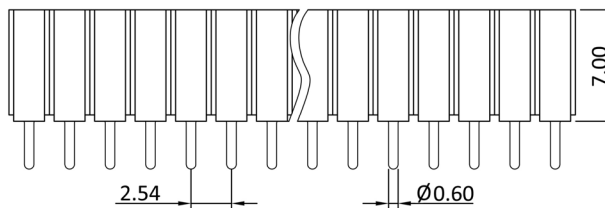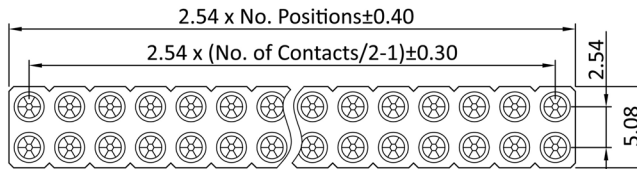

Order Information

Identifier:

MP70D

Socket connector strip pitch 2.54 mm double row height 7.0 mm

No. of Contacts:

#

4: 2 x 2

6: 2 x 3

8: 2 x 4

:

80: 2 x 40