


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

**SPECIFICATIONS:**

- 1.Switch Rating: AC250V/0.5A, DC36V/2A.
- 2.Mechanical Life:≥1,000,000cycles.
- 3.Electrical Life: ≥200,000cycles(DC 36V);  
≥50,000cycles(AC 220V).
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥1,000MΩ.
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25°C~ +55°C(No Freezing).
- 8.Operating Force: About 4N.
- 9.Operating Travel: About 2mm.
- 10.Torque: About 0.6Nm max.applied to nut.
- 11.Protection degree: IP65;IK08.
- 12.Terminal Type: Screw Terminal.

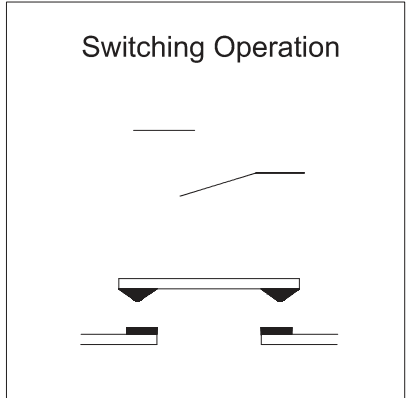

**MATERIALS:**

- 1.Contact: Silver alloy.
- 2.Button: ◎.
- 3.Body: ◎.
- 4.Base: PBT.

PANEL CUTOUT  
MAX.PANEL THICKNESS  
6 mm

Seal Ring

Part Number: GQ16F-10/◎

"◎"	Crust Material
N	Nickel Plated Brass
S	Stainless Steel
A	Al alloy(black)
G	Gold Plated Brass

BRAND 品牌 <b>ONPOW</b>		红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.		USED 用途	APPD 审核	CH 2020/04/11	
		FINISH 处理	CHKD 校对	NCH 2020/04/11	
SCALE 比例 1. □ / 1		UNIT 单位 mm	DR. 制图	ZPD 2020/04/11	
DIMENSIONS		TOLERANCE		TITLE 名称 GQ Series Anti-vandal push button	
0.00 TO 18.00mm		±0.43mm		DWG NO. 图号 GQ16F-10	
18.01 TO 30.00mm		±0.52mm			
30.01 TO 50.00mm		±0.62mm			
50.01 TO 80.00mm		±0.74mm			
FILE NAME 档案名称 GQ16-10.DWG		SHEET 张	1 / 1	REV. 更改	1
				SIZE 图纸	A4