
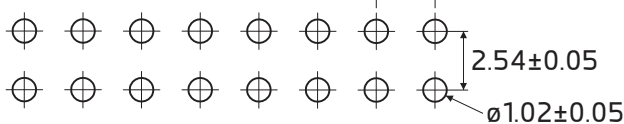
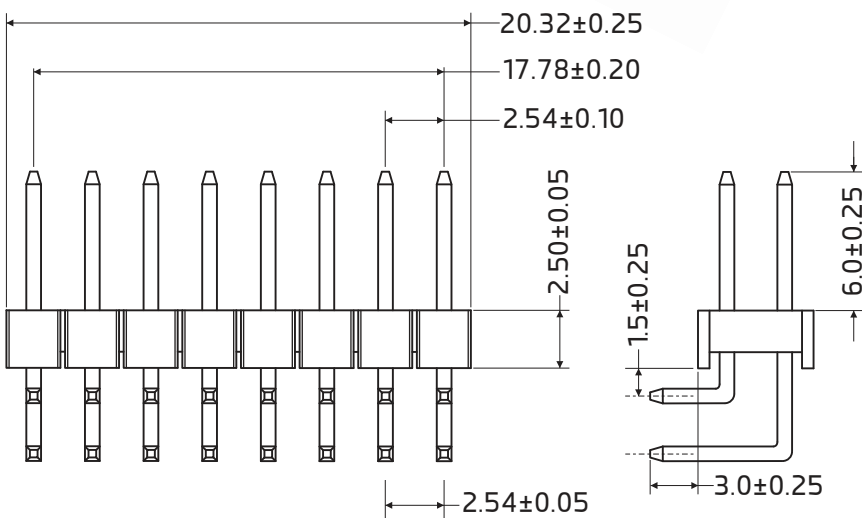
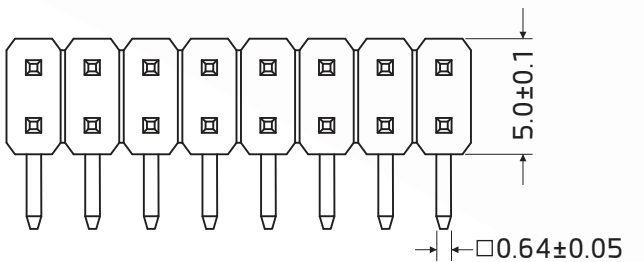



Datenblatt

Right Angle Pin Header, 2.54mm, Dual row, 2 x 8 pin

Right Angle Pin Header, Pitch: 2.54mm, Dual row, 2 x 8 Pin (16 way), 5pcs pack

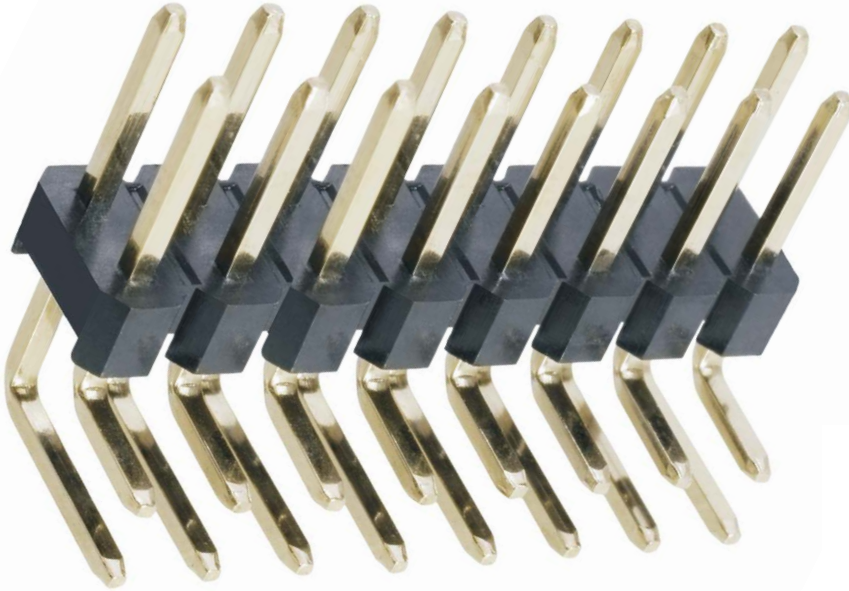

Recommended Board Hole Layout

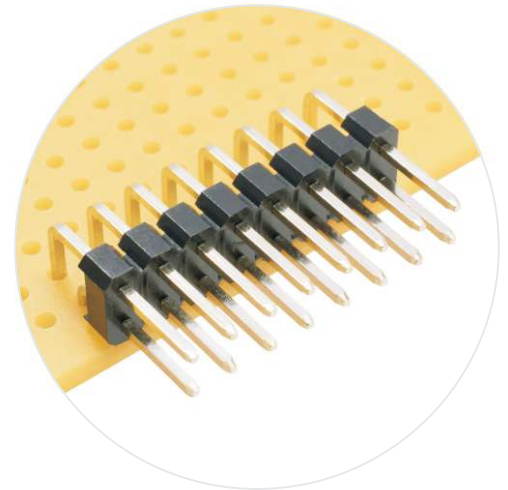

Specifications

Material:
Insulator material: Glass Fibre filled PBT
Contact material: Brass
Plating: Au/Ni 0.8µm Gold over 30µm Nickel

Electrical:
Current rating: 3 Amp/contact pin max.
Contact resistance: 20mΩ/contact pin max.
Insulation resistance: 100MΩ min. at 100V
Withstanding voltage: 500V/AC / minute

Mechanical:
Mechanical life cycle: 200cycles min.
Operating temperature: -40°C to 105°C
Soldering temperature: 260°C at 10sec. max.