


尺寸标注及检具说明: 尺寸标有以下符号的尺寸为重点尺寸!	序号	日期	变更内容	修改者
① "卡尺" ② "塞规" ③ "千分尺" ④ "高度计" ⑤ "工显或影像仪" ⑥ "齿轮啮合仪" ⑦ "齿轮检测中心" ⑧ "三次元" ⑨ "其他重检项目"				

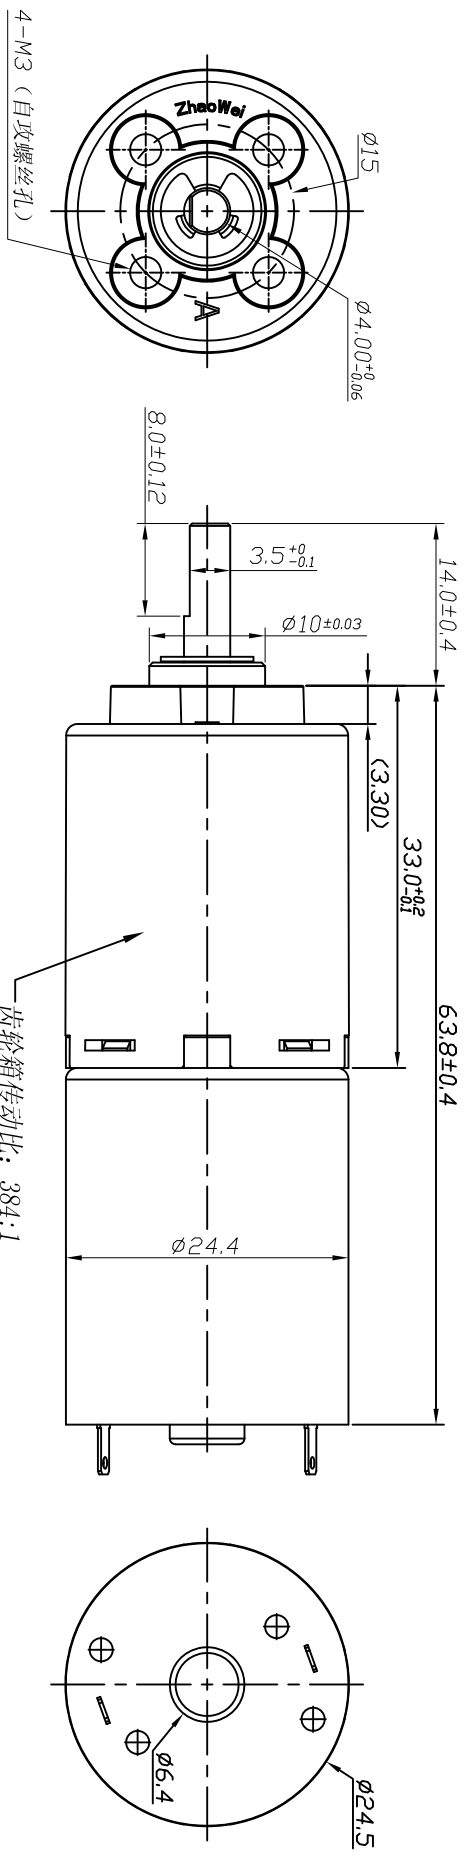

GEARBOX DATA(REF):

1	Rated Voltage	12.0 VDC	2	Idle Current	150 mA Max
3	Idle Speed	15±15% rpm	4	Rated Torque	4200g cm
5	Rated Speed	11±15% rpm	6	Rated Current	280 mA Max
7	Permit Max Torque	5.0kg.cm	8	Idle Noise	56dB(A) Max
9	Gear Ratio	384:1			

Noise Test Method: Detector with sponge to gearbox side 20cm in ambient noise under 32dB.

TECHNICAL REQUIREMENTS:

- 1.No defects such as crack, scratch, burr and deformation
- 2.No abnormal noise during testing.
- 3.RoHS compliant.

技术要求:

1. 产品表面无裂纹、划痕、擦伤等缺陷。
2. 产品测试中无异音。
3. 环保要求: 满足ROHS指令规定。

产品名称	φ24塑胶齿轮箱		产品代码	ZMPD024024-384																					
客户名称	南 奋 勇	设计	2015-03-19	审核																					
未注公差	<table border="1"> <tr> <th>公差带</th> <th>IT 11</th> <th>IT 12</th> </tr> <tr> <td>0-3</td> <td>0.06</td> <td>0.10</td> </tr> <tr> <td>3-6</td> <td>0.075</td> <td>0.12</td> </tr> <tr> <td>6-10</td> <td>0.11</td> <td>0.15</td> </tr> <tr> <td>10-18</td> <td>0.13</td> <td>0.18</td> </tr> <tr> <td>18-30</td> <td>0.13</td> <td>0.21</td> </tr> <tr> <td>30-50</td> <td>0.16</td> <td>0.25</td> </tr> </table>				公差带	IT 11	IT 12	0-3	0.06	0.10	3-6	0.075	0.12	6-10	0.11	0.15	10-18	0.13	0.18	18-30	0.13	0.21	30-50	0.16	0.25
公差带	IT 11	IT 12																							
0-3	0.06	0.10																							
3-6	0.075	0.12																							
6-10	0.11	0.15																							
10-18	0.13	0.18																							
18-30	0.13	0.21																							
30-50	0.16	0.25																							
符合《ROHS相关禁止物质标准》	<table border="1"> <tr> <td>共 1 张</td> <td>版本</td> <td>A</td> </tr> <tr> <td>第 1 张</td> <td>比例</td> <td>1:1</td> </tr> </table>				共 1 张	版本	A	第 1 张	比例	1:1															
共 1 张	版本	A																							
第 1 张	比例	1:1																							

