

[1107GU]

Typical Specifications

1. Rating : DC12V 50mA
2. Travel : 0.25 ± 0.1 mm
3. Contact Resistance : $100\text{m}\Omega$ Max.
4. Bounce : 10m SEC MAX.
5. Operating Force
 - * DJT1107GU-1 : 130 ± 30 gf [50,000Cycle]
 - * DJT1107GU-2 : 180 ± 50 gf [50,000Cycle]
 - * DJT1107GU-3 : 250 ± 50 gf [30,000Cycle]

Features


- ▶ 6.1* 3.7mm square thin type:2.5mm in height
- ▶ Excellent clear click feeling due to tactile feedback characteristic.
- ▶ Reflow soldering applicable
- ▶ Dust proof construction
- ▶ Available for tape and reel package

Application

Operating push-button switches for portable CD or MD players




Order Code Explanation

1107G ■ - ■



ITEM	CODE
Operating Force:130, 160, 250gf	1. 2. 3
Bending Type : S, U, Straight	S, U, Noitem

Outline Drawing

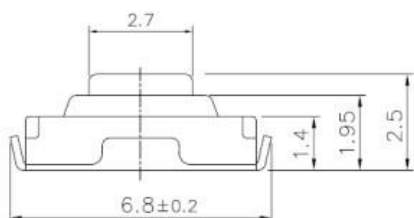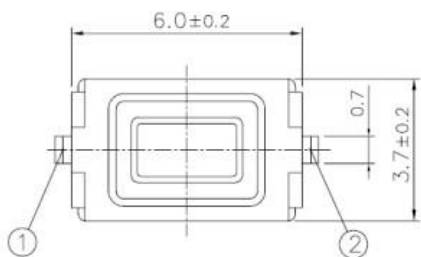

CIRCUIT DIAGRAM



P.C.B LAND PATTERN

