

**Female Headers
Pitch 2.54 mm, straight**

Single row, height 8.5 mm



SPECIFICATION:

Operating Current (Nom.):	3 A
Operating Temperature:	-40°C to 105°C
Insulation Resistance (Min.):	1000 MΩ
Contact Resistance (Max.):	20 mΩ
Dielectric Strength:	1,000 Vac

MATERIAL:





Material (Housing):	PBT
Flammability Class:	UL 94 V-0
Material (Contact Area):	copper alloy, gold plated

HANDLING:

Processing:	wave soldering
Packaging:	tray

TOLERANCE:

.X:	± 0.25
.XX:	± 0.20

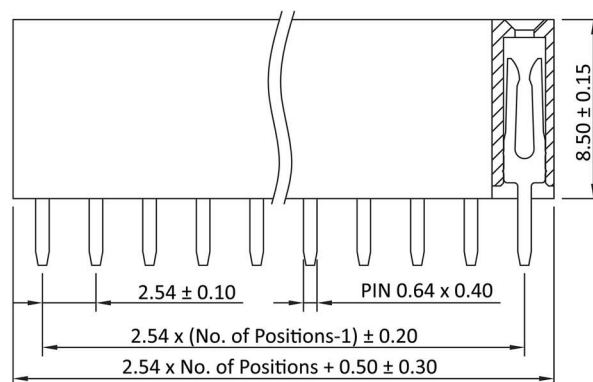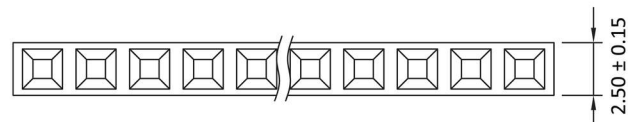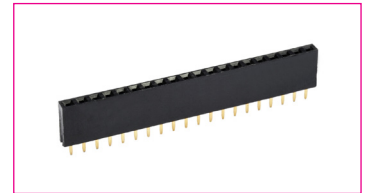

Order Information

Identifier:	Version:	No. of Contacts:
BL	G	#
Female header pitch 2.54 mm single row	straight	1X2: 1 x 2
		1X3: 1 x 3
		1X4: 1 x 4
		:
		1X40: 1 x 40