

**TOSHIBA**

Leading Innovation >>>

# Success based on quality.

LED Product catalogue 11/2014



**E-CORE™**  
LED Lighting

## Lighting increases a sense of security and well being

Light is malleable and can therefore be varied according to our needs and our environment. Light enables us to plan by being a solution in itself for even the most tailored requirements - whether traditional or innovative, practical or emotional. Toshiba has been producing lighting for over 120 years. With our wide range of products, we offer the optimal solution for perfect light.

Our LED lamps and luminaires meet the highest standards thanks to their efficiency and functionality as well as their outstanding aesthetics.

Be inspired by this product brochure with the many ways to achieve your lighting solution.

# CONTENTS

## Industrial

Lighten up your work

10



## Outdoor

Go with safety

14



## Recessed and Downlights

Light - as you like it

20



## PACK Series

Ready for the perfect light

28



## Spotlights

I want to see just that

36



## Lamps

LED - lighting for all moods

46



## Reflector Lamps

The freedom to set the tone

58



## Modules

Optimal lighting conditions

74



## Toshiba LED

History, environment, energy efficiency

4 | 56

## Glossary

General and technical features


84 | 85

## 244/2009 / 1194/2012

The EU-Regulations

57 | 73

# A 120 year history of success

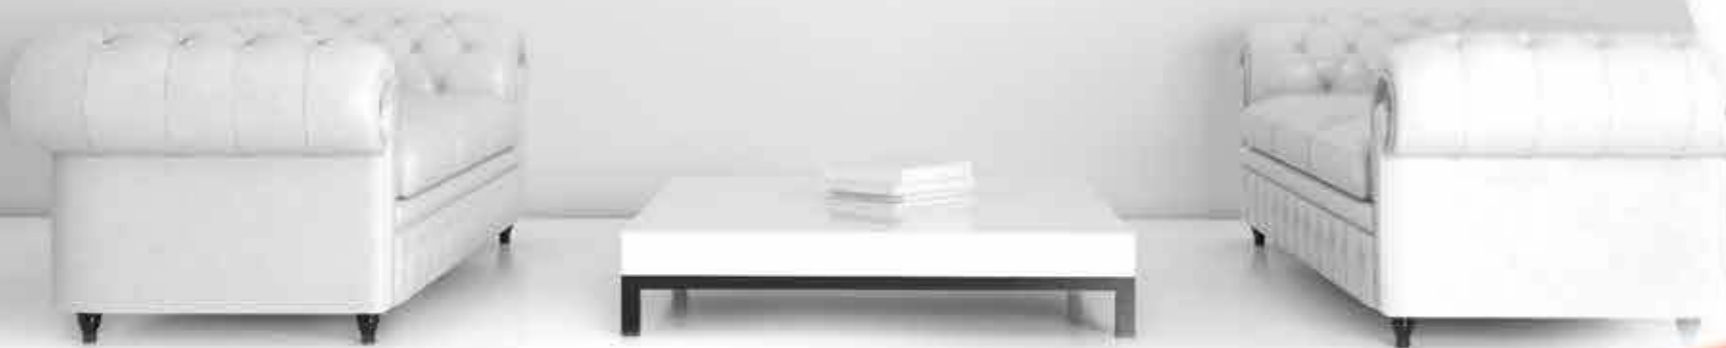

## Lighting technology from Toshiba

### 1875

Hisashige Tanaka founded the company Tanaka Engineering Works (Tanaka Seizo-sho), which was later renamed Shibaura Engineering Works (Shibaura Seisaku-sho).

### 1890

Ichisuke Fujioka founded the company Hakunetsu-sha & Co. Ltd., Japan's first incandescent lamp factory. It produced carbon filament lamps.

### 1899

Renamed Tokyo Electric Company (Tokyo Denki).

### 1939

Merger of the Tokyo Electric Company and Shibaura Engineering Works Co. Ltd. (Tanaka Seisaku-sho) in Tokyo Shibaura Electric Co. Ltd. - In short, Toshiba.

### 1940

Production of Japan's first fluorescent lamp.

### 1980

Production of the world's first compact bulb-shaped fluorescent lamp - the "NeoBall" - characterised by its low energy consumption rate.

### 2007

Development of the E-CORE LED Downlights - with a lamp life of over 40,000 hours. LED becomes a universal means of lighting.



### 2008

Toshiba's Environmental Vision 2050 seeks to harmonize the environment with a better future for people. Toshiba Lighting therefore announces the termination of the production of conventional light bulbs in 2010.

### 2009

Production E-CORE LED Lamp: LED enters a new market by becoming compliant with classical lamps.

### 2010

March 2010: termination of the production of incandescent light bulbs.

### 2012

Expand further in the european market thanks to a fixture line-up covering commercial lighting applications.

### 2014

Toshiba Lighting takes accent illumination one step further: the NEOACCENT Shoplights integrate perfectly into different indoor architecture and enable an optimized heat management.

- + VERY LOW COLOUR TOLERANCE
- + EXTREMELY LONG LIFETIME
- + NO HEAT IN BEAM
- + EXTREMELY LOW POWER CONSUMPTION
- + HARMONIOUS LIGHT COLOURS
- + NO UV OR IR RADIATION
- + LEAD AND MERCURY-FREE
- + INSTANT QUALITY LIGHT
- + DIMMABLE\* BETWEEN 10 AND 100%

\* Trailing edge dimmer; Compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)

# Toshiba's environmental vision for 2050

## "Improving our global eco-efficiency by 2050"

Do you believe it? At Toshiba, we do.

We are convinced that economy compliments ecology and that each corporation is responsible for the economical, social and environmental issues of its products.

One of many examples: after years of hard work, our LEDs use up to 80% less energy than incandescent lamps.

Environment is our priority.

Welcome to Toshiba.



## LED: 3 letters for 1 solution

With such ambitious goals, Toshiba Lighting had to find means to produce much better light bulbs than incandescent and halogen lamps. This aim combined with economic and environmental issues: we blazed our path to the solution.

In the 70's, an LED was used as a coloured indicator or warning lights.

In 1996, we obtained white light LEDs.

Today LEDs light large areas like museums, public places and parks to houses.

We began developing LEDs in the very early stages of the technology as we saw its potential for vast energy savings and long life. It was a gamble that we are now seeing a return on many years later. A true sign of our commitment to this innovative technology.



## The four "Greens" and the management supporting them

Achieving the highest level of environmental performance in all newly developed product to reduce life-cycle environmental impact

**Greening of Products**  
Creation of products with highest level of environmental performance

**Greening of Process**  
Environmentally conscious manufacturing

Achieving one of the world's lowest levels of environmental impacts by reducing all manufacturing-related environmental impact

**Greening of Technology**  
Low-carbon energy technologies

**Green Management**  
Continuous improvement of basic activities

Contributing to provision of a stable power supply and mitigation of climate change through the low-carbon energy technologies

Aiming to be the most excellent company in environmental management through the training of employees and continuous improvement in environmental communications

## Toshiba Lighting makes history

Back in 2008, we announced that we anticipated the end of the production of conventional incandescent lamps by 2010. And, as it happens we were right - with production completely shut down in 2010. Toshiba Lighting sees itself as the brand that researches, develops and manufactures with man and the environment in mind.

We have given a name to this consistent thought and action: Akari. Focus on the needs of people as well as thinking and acting sustainably. This is the driving force behind Toshiba's continuous innovation processes.

This shapes Toshiba E-CORE LED products and makes them unique and exemplary. Exemplary in: operating life, energy consumption, reduction of CO2 emissions by 80 % compared to conventional incandescent lamps, the range of the performance and colour spectrum and the resulting application possibilities. „Leading Innovation“ - in no other area is this claim of Toshiba more directly experienced than here.

# Who else but Toshiba!

## E-CORE LED Lighting, your partner for the future

From the beginning, E-CORE LED Lighting was praised by a large public composed of retailers, professionals, architects and end users, as its 73% growth over last year shows.

Whether it be „a light to see“ for your general lighting or a „light accent“ for your shop displays, E-CORE LED Lighting will meet your needs.

Let's discover our catalogue for 2014/15. Just follow the light.

## Why does everybody choose E-CORE LED Lighting?

Last year, hundreds of thousands of professionals and customers from the whole world chose our LEDs. How can we explain such a success? Let's ask them!

- + Our LEDs last up to 60,000 hours without any maintenance
- + Our LEDs use up to 80 % less energy than incandescent lamps
- + Our LEDs withstand shock and vibration
- + Our LEDs generate virtually no ultraviolet and no infra red
- + Our LEDs can reduce CO2 emissions by 80 % compared to incandescent lamps
- + Generate less heat thereby contributing towards lower air-conditioning costs
- + A very wide range with many sizes and colours offering new creative opportunities

## A very wide range for many different needs

With E-CORE LED Lighting, Toshiba wants to make as many people as possible benefit from its progress. For many years, our engineers worked altogether to develop our LED technology.

We are very demanding with ourselves in order to reach one goal: Answer all your lighting needs.

This catalogue is made for you. Read it carefully: the future is under your eyes.

# INDUSTRIAL

## Lighten up your work

For industrial companies in particular, vision is key. That's why it's all the more important to use robust, high-performance light sources – such as Toshiba industrial lighting fixtures. They meet international standards and exceed your expectations. That's because they are durable, energy-efficient and low-maintenance, making them the most reliable industrial lighting fixtures of our time.




## E-CORE LED WEATHERPROOF 2

The name says it all: designed to IP65, this robust diffuser luminaire is the ideal lighting solution for all areas with particular climatic or functional requirements. It is a replacement for T8 Lamp installations in warehouses, underground car parks, cold stores and other similar situations.


### FEATURES

- Applicable lamp: E-CORE LED TUBE GX16t-5
- Dimmable: No (DALI dimmable on request)
- Electrical class: II
- Protection rating: IP65
- Power factor: > 0.9


### LIGHT DISTRIBUTION



### DIMENSIONS

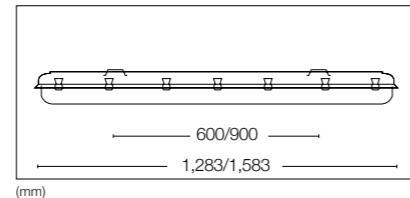

### DIMENSIONS




COVER	COLOUR TEMPERATURE	LUMINOUS FLUX	GLOW WIRE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>NEUTRAL WHITE</b>							
LEDEUP00003S40	4000 K	2,760 lm	850 °C	32 W	220 - 240 V	80	40,000 h
LEDEUP00005S40		3,320 lm		40 W	220 - 240 V	80	40,000 h
LEDEUP00007S40		2,930 lm	650 °C	32 W	220 - 240 V	80	40,000 h
LEDEUP00009S40		3,550 lm		40 W	220 - 240 V	80	40,000 h



## E-CORE LED HIGHBAY 12000

Extremely robust, absolutely homogeneous and very efficient - the E-CORE LED HIGHBAY 12000 stands for up-to-date industrial lighting. With a luminous flux of ~11,000 lm, good light quality and UGR 20 and UGR 26 this tough luminaire is ideal for illuminating different functional areas. The E-CORE LED HIGHBAY is a suspended fixture for any use where robustness and long life time is a must.


### CONSTANT LUMEN OUTPUT




### FEATURES

- Dimmable: No
- Electrical class: I
- Protection rating: IP65
- Power factor: 0.95
- Temperature range: -20 °C – +35 °C
- Constant lumen output (can be switched off if required)


### LIGHT DISTRIBUTION



### DIMENSIONS

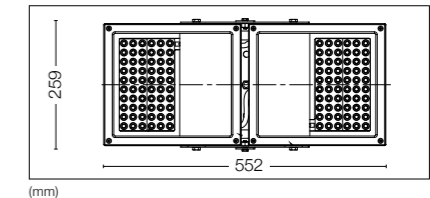

### DIMENSIONS



COLOUR TEMPERATURE	LUMINOUS FLUX	UGR	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN
<b>NEUTRAL WHITE</b>							
4000 K	• 8,470 lm	≤ 28	91°	135 W	220 - 240 V	80	60,000 h
	• 8,663 lm	≤ 22	60°		220 - 240 V	80	60,000 h
5000 K	• 10,680 lm	≤ 28	91°	135 W	220 - 240 V	70	60,000 h
	• 10,625 lm	≤ 22	60°		220 - 240 V	70	60,000 h

# Outdoor

## Go with safety

No one likes to be in dark parking lots or on unlit roads. Yet, for cost reasons, many cities practice the nightly shutdown of street lighting or the sparse lighting of car parks and public facilities.

This need not be so. Toshiba offers absolute cost-efficiency with energy-efficient outdoor lighting, a very long life and excellent design. Toshiba outdoor lighting - making cities user-friendly.






### E-CORE LED FLOODLIGHT 3000

Night-time lighting of buildings and other structures is a standard element of urban spatial design. This pivoting facade spotlight is the suitable tool for the job. Unbreakable, long-lasting and with an impressively uniform light output, it makes modern architectural lighting a reality. In figures, this represents upto 2,880 lumen at a power consumption of just 35 W and a nominal service life of 60,000 hours.


**FEATURES**

- Dimmable: No / Yes (CLO)
- Electrical class: II
- Protection rating: IP65
- Power factor: 0.9
- Temperature range: -20 °C – +35 °C
- Constant lumen output (can be switched off if required)
- ENEC


**CONSTANT LUMEN OUTPUT**




**DIMENSIONS**



**DIMENSIONS**



**DIMENSIONS**



FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	IK	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN
<b>WARM WHITE</b>								
Silver	3000 K	LEDEUF00019I30N	2,015 lm	Narrow - 11°	07	30 - 40 W	220 - 240 V	60,000 h
		LEDEUF00020I30N	1,860 lm	Middle - 25°	07	30 - 40 W	220 - 240 V	60,000 h
		LEDEUF00021I30N	1,845 lm	Wide - 43°	07	30 - 40 W	220 - 240 V	60,000 h
		LEDEUF00022I30N	1,775 lm	Asym - 58° x 127°	07	30 - 40 W	220 - 240 V	60,000 h
<b>NEUTRAL WHITE</b>								
Silver	4000 K	LEDEUF00019I40N	2,015 lm	Narrow - 11°	07	30 - 40 W	220 - 240 V	60,000 h
		LEDEUF00020I40N	1,860 lm	Middle - 25°	07	30 - 40 W	220 - 240 V	60,000 h
		LEDEUF00021I40N	1,845 lm	Wide - 43°	07	30 - 40 W	220 - 240 V	60,000 h
	5000 K	LEDEUF00022I40N	1,775 lm	Asym - 58° x 127°	07	30 - 40 W	220 - 240 V	60,000 h
		LEDEUF00019I50N	2,880 lm	Narrow - 11°	07	30 - 40 W	220 - 240 V	60,000 h
		LEDEUF00020I50N	2,655 lm	Middle - 25°	07	30 - 40 W	220 - 240 V	60,000 h
LEDEUF00021I50N	2,640 lm	Wide - 43°	07	30 - 40 W	220 - 240 V	60,000 h		
LEDEUF00022I50N	2,540 lm	Asym - 58° x 127°	07	30 - 40 W	220 - 240 V	60,000 h		




### E-CORE LED FLOODLIGHT 5500

The swivelling architecture light called the E-CORE LED FLOODLIGHT 5500 ensures impressive, bright and thus very cost-effective lighting. You enjoy tremendous flexibility with your light design thanks to the large choice of lumen packages, three different colour temperatures and various beam angles. Furthermore, the constant luminous flux control over the entire operational life offers unvarying brightness.


**FEATURES**

- Dimmable: No / Yes (CLO)
- Electrical class: II
- Protection rating: IP65
- Power factor: 0.9
- Temperature range: -20 °C – +35 °C
- Constant lumen output (can be switched off if required)
- ENEC


**CONSTANT LUMEN OUTPUT**




**DIMENSIONS**



**DIMENSIONS**



**DIMENSIONS**




FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	IK	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN
<b>WARM WHITE</b>								
Silver	3000 K	LEDEUF00023I30N	4,035 lm	Narrow - 11°	07	57 - 75 W	220 - 240 V	60,000 h
		LEDEUF00024I30N	3,720 lm	Middle - 25°	07	57 - 75 W	220 - 240 V	60,000 h
		LEDEUF00025I30N	3,695 lm	Wide - 43°	07	57 - 75 W	220 - 240 V	60,000 h
		LEDEUF00026I30N	3,555 lm	Asym - 58° x 127°	07	57 - 75 W	220 - 240 V	60,000 h
<b>NEUTRAL WHITE</b>								
Silver	4000 K	LEDEUF00023I40N	4,035 lm	Narrow - 11°	07	57 - 75 W	220 - 240 V	60,000 h
		LEDEUF00024I40N	3,720 lm	Middle - 25°	07	57 - 75 W	220 - 240 V	60,000 h
		LEDEUF00025I40N	3,695 lm	Wide - 43°	07	57 - 75 W	220 - 240 V	60,000 h
	5000 K	LEDEUF00026I40N	3,555 lm	Asym - 58° x 127°	07	57 - 75 W	220 - 240 V	60,000 h
		LEDEUF00023I50N	5,760 lm	Narrow - 11°	07	57 - 75 W	220 - 240 V	60,000 h
		LEDEUF00024I50N	5,315 lm	Middle - 25°	07	57 - 75 W	220 - 240 V	60,000 h
LEDEUF00025I50N	5,280 lm	Wide - 43°	07	57 - 75 W	220 - 240 V	60,000 h		
LEDEUF00026I50N	5,080 lm	Asym - 58° x 127°	07	57 - 75 W	220 - 240 V	60,000 h		




### Accessories for E-CORE LED FLOODLIGHT 3000/5500

These practical accessories are the perfect complement to the LED Floodlight 3000 and 5500 models. The ground spike is designed for securing the LED Floodlight to the ground, and provides a secure and stable support for all applications close to the ground. The wall-mounting boom is the ideal solution for securing the LED Floodlight to facades or buildings. With this boom, the LED Floodlight can easily be offset from walls at a 60 cm distance, providing perfect illumination. Both accessories are available in white or silver.

WALL MOUNTING ARM - DIMENSIONS

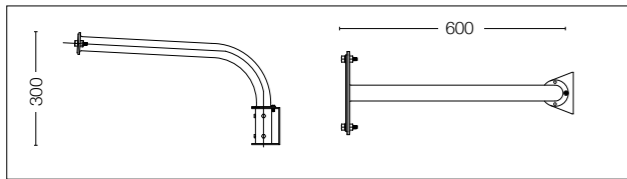

GRASS MOUNTING SPIKE - DIMENSIONS

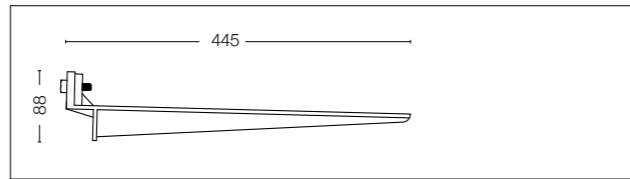


(mm)

(mm)

	FINISH	DESCRIPTION
<b>WARM WHITE</b>		
LEDEUFX0004	White	Grass Mounting Spike
LEDEUFX0005	Silver	
LEDEUFX0002	White	Wall mounting Arm
LEDEUFX0003	Silver	

BEAM ANGLE

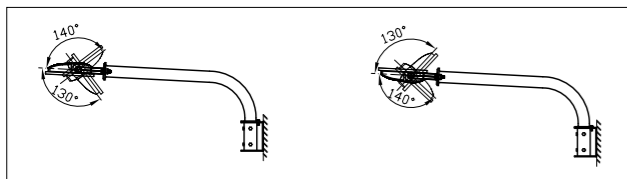

### E-CORE LED FLOODLIGHT 3000



30-40W - up to 2,880 lm  
warm or neutral white  
3000 K/4000 K/5000 K  
60,000 hours life  
beam angle 11°/25°/43°/58° x 127°  
silver

### E-CORE LED FLOODLIGHT 5500



57-75 W - up to 5,760 lm  
warm or neutral white  
3000 K/4000 K/5000 K  
60,000 hours life  
beam angle 11°/25°/43°/58° x 127°  
silver

# Recessed and Downlights

## Light - as you like it

Anyone who wants to be able to use all possible means to save energy uses LED lighting solutions. In particular, our recessed luminaires and downlights inspire and save in many ways, because they are used almost universally - in large offices, classrooms, auditoriums, halls and corridors, shops and homes.

They combine an inspiring atmosphere of light, functional lighting and the highest energy and cost saving potential. A lighting solution could hardly be more complete.



## NEOGRID

Energy efficiency on a completely new level – with up to 122 lm/W the LED Baselight NEOGRID out-ranges even modern fluorescent lamp technologies. DALI controllable lumen packages of up to 3,650 lm combined with excellent light quality and compliance to the EN 12464 make this unobtrusive louvre luminaire the perfect solution for today's office environments. All this is rounded off with a comprehensive product line-up, offering optimized flexibility and meeting various application requirements.


DIMMABLE




### FEATURES

- Dimmable: Yes / DALI
- Electrical class: I
- Protection rating: IP20
- Power factor: > 0.9
- ENEC
- White or aluminium specular reflector surface
- DC capability: Yes


### LIGHT DISTRIBUTION



### DIMENSIONS

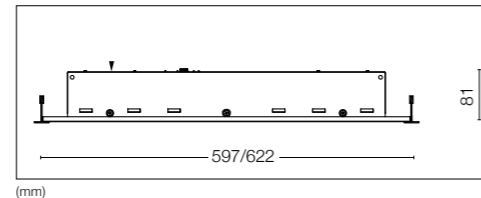

SYSTEM  
CEILING  
MODULE  
600 x 600 mm  
625 x 625 mm



REFLECTOR	COLOUR TEMPERATURE	UGR	GRID CEILINGS	LUMINOUS FLUX	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>								
LEDEUR00004D30N	White	≤ 19	600 x 600 mm	• 3,100 lm	30 W	220 - 240 V	80	50,000 h
LEDEUR00005D30N	White		625 x 625 mm	• 3,100 lm	30 W	220 - 240 V	80	50,000 h
LEDEUR00006D30N	Aluminium	≤ 16	600 x 600 mm	• 3,370 lm	30 W	220 - 240 V	80	50,000 h
LEDEUR00007D30N	Aluminium		625 x 625 mm	• 3,370 lm	30 W	220 - 240 V	80	50,000 h
<b>NEUTRAL WHITE</b>								
LEDEUR00004D40N	White	≤ 19	600 x 600 mm	• 3,350 lm	30 W	220 - 240 V	80	50,000 h
LEDEUR00005D40N	White		625 x 625 mm	• 3,350 lm	30 W	220 - 240 V	80	50,000 h
LEDEUR00006D40N	Aluminium	≤ 16	600 x 600 mm	• 3,650 lm	30 W	220 - 240 V	80	50,000 h
LEDEUR00007D40N	Aluminium		625 x 625 mm	• 3,650 lm	30 W	220 - 240 V	80	50,000 h




## E-CORE LED PANEL 2

Extremely thin, absolutely homogenous and very efficient – the edge-lit ECORE LED Panel 2 stands for up-to-date general lighting. With a luminous flux of up to 3,500 lm, excellent light quality and compliance to the EN 12464 this unobtrusive luminaire is the ideal fit for a wide range of functional and representative areas. The E-CORE LED Panel 2 is suitable for standard 600 mm and 625 mm grid ceilings, furthermore it can be easily converted into an elegant suspended panel by using the additional suspension kit.


### FEATURES

- Dimmable: No
- Electrical class: II
- Protection rating: IP20
- Power factor: > 0.9
- Temperature range: 5 °C – 40 °C


### LIGHT DISTRIBUTION




### DIMENSIONS



### DIMENSIONS



SYSTEM  
CEILING  
MODULE  
600 x 600 mm  
625 x 625 mm



REFLECTOR	COLOUR TEMPERATURE	UGR	GRID CEILINGS	LUMINOUS FLUX	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>								
LEDEUR00008N30	3000 K	≤ 19	597 x 597 mm	• 3,300 lm	41 W	220 - 240 V	80	30,000 h
LEDEUR00009N30		≤ 19	622 x 622 mm	• 3,300 lm	41 W	220 - 240 V	80	30,000 h
<b>NEUTRAL WHITE</b>								
LEDEUR00008N40	4000 K	≤ 19	597 x 597 mm	• 3,500 lm	41 W	220 - 240 V	80	30,000 h
LEDEUR00009N40		≤ 19	622 x 622 mm	• 3,500 lm	41 W	220 - 240 V	80	30,000 h
LEDEURX0002	Suspension Kit (2 x 1350 mm)							






### E-CORE LED DOWNLIGHT 6000

Brilliant, controllable light even with high ceilings: the DOWNLIGHT 6000 is the contemporary replacement light for areas where 70 W HID were traditionally used. High foyers, large auditoriums, open staircases or shops – with up to 5,800 lumen this effective powerhouse covers all the bases in lighting design for public and commercial buildings.

DIMMABLE


DALI




**FEATURES**

- Dimmable: Yes / DALI
- Electrical class: II
- Protection rating: IP20
- Power factor: > 0.9
- Temperature range: 5 °C – 40 °C
- 2 drivers have to be ordered separately


**LIGHT DISTRIBUTION**




**DIMENSIONS**



**DIMENSIONS**



**CUT-OUT**



	FINISH	COLOUR TEMPERATURE	UGR	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>									
LEDEUD00129D30	White	3000 K	28	5,650 lm	72°	92 W	220 - 240 V	80	50,000 h
<b>NEUTRAL WHITE</b>									
LEDEUD00129D40	White	4000 K	28	5,945 lm	72°	92 W	220 - 240 V	80	50,000 h
LEK-50001CA010	50 W CC Driver (separately order, 2 drivers required)								




### E-CORE LED BANKLIGHT

The basis of the DALI dimmable E-CORE LED BANKLIGHT is the E-CORE LED DOWNLIGHT 6000. Integrated into robust housing, simple surface mounting is possible. On account of its high light intensity and its long service life, the E-CORE LED BANKLIGHT is good for lighting in shopping malls, theatres, industrial plants or entryways.


**FEATURES**

- Dimmable: Yes / DALI
- Electrical class: II
- Protection rating: IP20
- Power factor: > 0.95
- Temperature range: 0 °C – 40 °C
- 2 drivers have to be ordered separately

**LIGHT DISTRIBUTION**



**DIMENSIONS**



**DIMMABLE**

DALI

	FINISH	COLOUR TEMPERATURE	UGR	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>									
LEDEUD00130D30	White	3000 K	28	5,650 lm	72°	92 W	220 - 240 V	80	50,000 h
<b>NEUTRAL WHITE</b>									
LEDEUD00130D40	White	4000 K	28	5,945 lm	72°	92 W	220 - 240 V	80	50,000 h
LEDEUDX0007	Cylinder case								
LEDEUDX0008	Surface-mounting frame								
LEK-50001CA010	50 W CC Driver (separately order, 2 drivers required)								



# PACK Series

## Ready for the good light

Interior designer popular classic: when it is not the luminaire but the light that is key, the Toshiba PACK Series products are ideal for restaurants, shops, and for hall or room lighting.

They can be integrated into the wall or ceiling, swivelled and dimmed at will, and have a wide beam angle or spot light depending on the application.




### PACK omni mini 2


Small, efficient, simple – the all new PACK omni mini 2 opens up great opportunities for design integration and the easy step to efficiency, light quality and flexibility. Featuring the next generation of GX53-1 lamps, this compact downlight now appears in minimalistic dimensions, still with fixed and adjustable versions. The PACK omni mini 2 can replace up to 1 x 18 W conventional downlights and offers a replaceable light source – making it the easy and future-proof choice for energy saving in many applications.

**FEATURES**


- Applicable lamp: E-CORE GX53-1
- Dimmable: No
- Electrical class: II
- Protection rating: IP20
- Power factor: 0.55
- Temperature range: 5 °C – 35 °C
- Fix and adjustable (30°)




**DIMENSIONS ADJUSTABLE**



**DIMENSIONS FIX**



**CUT-OUT**



	COMPLETE WITH LAMP	FINISH	CEILING CUT-OUT	ADJUSTABLE	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>											
LEDEUD00152S27	Yes	White	100 mm	No	2700 K	• 405 lm	100°	5.7 W	220 - 240 V	> 80	40,000 h
LEDEUD00156S27	Yes	White	100 mm	No		• 560 lm	100°	8.3 W	220 - 240 V	> 80	40,000 h
LEDEUD00153S27	Yes	White	125 mm	Yes		• 485 lm	40°	5.7 W	220 - 240 V	> 80	40,000 h
LEDEUD00157S27	Yes	White	125 mm	Yes		• 650 lm	40°	8.3 W	220 - 240 V	> 80	40,000 h
<b>NEUTRAL WHITE</b>											
LEDEUD00156S40	Yes	White	100 mm	No	4000 K	• 600 lm	100°	8.3 W	220 - 240 V	> 80	40,000 h
LEDEUD00143C	No	White	100 mm	No	Fixture only - Order lamp separately (see page 79)						
LEDEUD00144C	No	White	125 mm	Yes (30°)	Fixture only - Order lamp separately (see page 79)						




### PACK omni 2


The classic downlight, reinvented. With its unobtrusive white housing, wide beam angles and powerful luminous flux, the PACK omni 2 is a suitable replacement for compact fluorescent lamps up to 2 x 26 W and a good allrounder in all secondary areas of buildings. What's new: the redesigned PACK omni 2 comes in two sizes and incorporates the next generation of the Toshiba LED LIGHT ENGINE – a light source that can be replaced in an instant and now offers 2,200 lm and DALI controllable versions (on demand).

**FEATURES**


- Applicable lamp: E-CORE LED LIGHT ENGINE 2
- Dimmable: No / DALI controllable types on demand
- Electrical class: I
- Protection rating: IP20
- Power factor: 0.9
- Temperature range: 5 °C – 35 °C




**DIMENSIONS**



**DIMENSIONS**



**CUT-OUT**



	COMPLETE WITH LAMP	FINISH	CEILING CUT-OUT	UGR	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>											
LEDEUD00145S30	Yes	White	150 mm	≤ 22	3000 K	970 lm	55°	12.7 W	220 - 240 V	> 80	40,000 h
LEDEUD00147S30	Yes	White		≤ 22		1,410 lm	55°	17.5 W	220 - 240 V	> 80	40,000 h
LEDEUD00149S30	Yes	White	≤ 22	1,940 lm		55°	24.0 W	220 - 240 V	> 80	40,000 h	
LEDEUD00165S30	Yes	White	≤ 22	1,020 lm		53°	12.7 W	220 - 240 V	> 80	40,000 h	
LEDEUD00167S30	Yes	White	200 mm	≤ 22	1,480 lm	53°	17.5 W	220 - 240 V	> 80	40,000 h	
LEDEUD00169S30	Yes	White	200 mm	≤ 22	2,040 lm	53°	24.0 W	220 - 240 V	> 80	40,000 h	
<b>NEUTRAL WHITE</b>											
LEDEUD00146S40	Yes	White	150 mm	≤ 22	4000 K	1,010 lm	76°	12.7 W	220 - 240 V	> 80	40,000 h
LEDEUD00148S40	Yes	White		≤ 22		1,480 lm	76°	17.5 W	220 - 240 V	> 80	40,000 h
LEDEUD00150S40	Yes	White	≤ 25	2,030 lm		76°	24.0 W	220 - 240 V	> 80	40,000 h	
LEDEUD00166S40	Yes	White	≤ 22	1,100 lm		78°	12.7 W	220 - 240 V	> 80	40,000 h	
LEDEUD00168S40	Yes	White	200 mm	≤ 22	1,600 lm	78°	17.5 W	220 - 240 V	> 80	40,000 h	
LEDEUD00170S40	Yes	White	200 mm	≤ 25	2,190 lm	78°	24.0 W	220 - 240 V	> 80	40,000 h	
LEDEUD00141C	No	White	150 mm	Non-dim fixture only – order lamp separately (see page 82)							
LEDEUD00161C	No	White	200 mm	Non-dim fixture only – order lamp separately (see page 82)							
LEDEUD00142C	No	White	150 mm	DALI fixture only – order lamp separately (see page 83)							
LEDEUD00162C	No	White	200 mm	DALI fixture only – order lamp separately (see page 83)							






### PACK omni mini

LED Downlights made easy and simple – the PACK omni mini opens up great opportunities for the small step to energy efficiency, light quality and flexibility. Next to fixed and adjustable luminaires, this compact line-up is rounded off with different colour temperatures and beam angles. Replacing up to 1 x 18 W conventional downlights and offering a replaceable light source, the PACK omni mini is the easy and future-proof choice for energy saving in many applications.


**FEATURES**

- Applicable lamp: E-CORE GX53
- Dimmable: No
- Electrical class: I
- Protection rating: IP20
- Power factor: 0.55
- Temperature range: 5 °C – 35 °C


**LIGHT DISTRIBUTION**



**DIMENSIONS**



**CUT-OUT**



	COMPLETE WITH LAMP	FINISH	ADJUSTABLE	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>										
LEDEUD00110S27	Yes	White	No	2700 K	• 445 lm	104°	6.9 W	220 - 240 V	80	25,000 h
LEDEUD00111S27	Yes	White	Yes		• 480 lm	44°				
LEDEUD00112S27	Yes	White	No		• 615 lm	105°	8.9 W	220 - 240 V	80	25,000 h
LEDEUD00113S27	Yes	White	Yes		• 660 lm	48°				
<b>NEUTRAL WHITE</b>										
LEDEUD00110S40	Yes	White	No	4000 K	• 480 lm	104°	6.9 W	220 - 240 V	80	25,000 h
LEDEUD00111S40	Yes	White	Yes		• 515 lm	44°				
LEDEUD00112S40	Yes	White	No		• 660 lm	105°	8.9 W	220 - 240 V	80	25,000 h
LEDEUD00113S40	Yes	White	Yes		• 695 lm	48°				
LEDEUD00126C	No	White	No	Fixture only -						
LEDEUD00127C	No	White	Yes	For information about suitable modules, please see our website: <a href="http://www.toshiba.eu/lighting">www.toshiba.eu/lighting</a>						

More information about the GX53 module on our website: [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)




### PACK omni

This product is a classic downlight. With its neutral white light colour, wide angle of radiation and powerful luminous flux, it is a suitable replacement for compact fluorescent lamps and a good all rounder in all secondary areas of buildings, such as access and waiting areas and corridors. The advantages of its economical, eco-friendly design become clear after 40,000 hours of operation with the Toshiba LED LIGHT ENGINE, a light source that can be replaced in an instant.


**FEATURES**

- Applicable lamp: LED LIGHT ENGINE
- Dimmable: Yes / Trailing Edge phase control
- Electrical class: I
- Protection rating: IP20
- Power factor: 0.7
- Temperature range: 5 °C – 35 °C


**LIGHT DISTRIBUTION**




**DIMENSIONS**



**CUT-OUT**



**DIMMABLE**



	COMPLETE WITH LAMP	FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>NEUTRAL WHITE</b>									
LEDEUD00076S40N	Yes	White	4000 K	1,040 lm	90°	18 W	220 - 240 V	> 80	40,000 h
LEDEUD00077S40N				1,560 lm		23 W			
LEDEUD00131C	No	White	Fixture only - For information about suitable modules, please see our website: <a href="http://www.toshiba.eu/lighting">www.toshiba.eu/lighting</a>						

More information about the LED LIGHT ENGINE module on our website: [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)






### PACK accent 3

This miniaturized downlight range features the latest Toshiba PAR16 lamps and offers great flexibility for an attractive accent lighting in various application fields. Where in the past halogen lamps up to 50 W have been widely used, now this simple but highly efficient 5.4 W LED solution makes an appropriate alternative - convincing through brilliance, precise beam angles, excellent light quality and a very long lifetime of 40,000 h. The lighting head can be swiveled by 30°, allowing to target the light where it is needed, different beam angles and housing colours round off the portfolio.

**FEATURES**

- Applicable lamp: E-CORE PAR16
- Dimmable: Yes / Phase control
- Electrical class: II
- Protection rating: IP20
- Power factor: 0.64
- Temperature range: 5 °C – 40 °C



	FINISH	COLOUR TEMPERATURE	LAMP LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>								
	White	3000 K	• 355 lm	40°	5.4 W	220 - 240 V	> 80	40,000 h
	Silver		• 355 lm		5.4 W	220 - 240 V	> 80	40,000 h
	Black	3000 K	• 355 lm	25°	5.4 W	220 - 240 V	> 80	40,000 h
	White		• 355 lm		5.4 W	220 - 240 V	> 80	40,000 h
	Silver		• 355 lm		5.4 W	220 - 240 V	> 80	40,000 h
	Black		• 355 lm		5.4 W	220 - 240 V	> 80	40,000 h
	White							
	Silver							
	Black							

Fixture only - For information about suitable modules, please see our website: [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)






### PACK accent track

This miniaturised spotlight convinces through brilliant light quality, precise light distribution and a long life-time – all combined in an appealing compact shape. Where in the past halogen lamps up to 50W have been widely used, now this simple but highly efficient LED solution makes an appropriate alternative. It features the latest Toshiba PAR16 lamp and offers an attractive accent lighting for many applications.

**FEATURES**

- Applicable lamp: E-CORE PAR16
- Dimmable: No
- Electrical class: I
- Protection rating: IP20
- Power factor: 0.7
- Temperature range: 5 °C – 35 °C
- With 3-circuit universal adapter
- Fixture is rotating 330°, pivoting 90°



	FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>								
	White	3000 K	350 lm	36°	5.5 W	220 - 240 V	> 80	15,000 h
	Silver		350 lm		5.5 W	220 - 240 V	> 80	15,000 h
	White	Fixture only - Order lamp separately (see page 62)						
	Silver	Fixture only - Order lamp separately (see page 62)						

# Spotlights

## I want to see just that

To specifically set the scene, to put the focus on what deserves it, to emphasize what is important - these are the strengths of the spotlight. Our spotlights are highly-efficient products for effective lighting effects - from subtle to obvious.

Their broad functionality and excellent design give you a great deal of leeway in the design of your spaces.




## NEOACCENT Tracklight

Dynamic design, powerful accents, full flexibility - the NEOACCENT series offers everything to enable a timeless, high quality accent illumination with LED. The tracklight convinces through its discrete streamline look that perfectly integrates into different indoor architecture and enables an optimized heat management. With lumen packages of up to 2,600 lm the NEOACCENT series can efficiently replace 20 W and 35 W HID systems.


### FEATURES

- Dimmable: Yes / Control on gear box
- Protection rating: IP20
- Temperature range: 5 °C – 35 °C
- Driver included in gear box
- Lighting head rotates 355°, pivots 90°
- With 3-circuit universal adapter


### LIGHT DISTRIBUTION



### DIMENSIONS



### DIMENSIONS

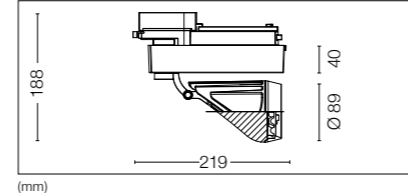

FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>								
LEDEUS00045B30	White	1,600 lm	15°	13,830 cd	22 W	220 - 240 V	85	40,000 h
LEDEUS00046B30	White	1,600 lm	25°	8,000 cd		220 - 240 V	85	40,000 h
LEDEUS00047B30	White	1,500 lm	35°	3,300 cd		220 - 240 V	85	40,000 h
LEDEUS00054B30	White	2,420 lm	15°	21,170 cd	32 W	220 - 240 V	85	40,000 h
LEDEUS00055B30	White	2,370 lm	25°	10,970 cd		220 - 240 V	85	40,000 h
LEDEUS00056B30	White	2,340 lm	35°	4,885 cd		220 - 240 V	85	40,000 h
<b>NEUTRAL WHITE</b>								
LEDEUS00045B40	White	1,700 lm	15°	14,830 cd	22 W	220 - 240 V	85	40,000 h
LEDEUS00046B40	White	1,700 lm	25°	8,700 cd		220 - 240 V	85	40,000 h
LEDEUS00047B40	White	1,600 lm	35°	3,700 cd		220 - 240 V	85	40,000 h
LEDEUS00054B40	White	2,600 lm	15°	22,780 cd	32 W	220 - 240 V	85	40,000 h
LEDEUS00055B40	White	2,550 lm	25°	11,800 cd		220 - 240 V	85	40,000 h
LEDEUS00056B40	White	2,520 lm	35°	5,260 cd		220 - 240 V	85	40,000 h

Exists also in black and silver. Please see our website or contact your representative for further information. Additional High CRI filter available as accessory (see page 41)



## NEOACCENT Battery

The NEOACCENT Battery recessed luminaires enable solutions that can be combined individually to meet even the most unusual challenges. The single, double and triple installation frames can be fitted, according to the customer's wishes and needs, with any of the varied range of light heads. These integrate seamlessly into the ceiling design, still offering maximum flexibility through adjustability - always projecting the light to where it is needed.


### DIMMABLE




### FEATURES

- Dimmable: Yes / DALI
- Protection rating: IP20
- Temperature range: 5 °C – 35 °C
- Independent driver included
- Individual lighting heads swivel out 30°, rotate 360°


### LIGHT DISTRIBUTION



### DIMENSIONS



### DIMENSIONS

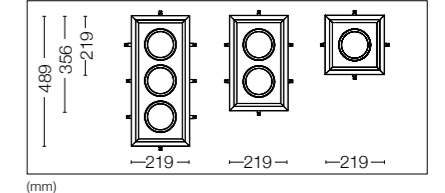

FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>LIGHT HEAD - WARM WHITE</b>								
LEDEUS00072D30	White	1,600 lm	15°	13,830 cd	22 W	220 - 240 V	85	40,000 h
LEDEUS00073D30	White	1,600 lm	25°	8,000 cd		220 - 240 V	85	40,000 h
LEDEUS00074D30	White	1,500 lm	35°	3,300 cd		220 - 240 V	85	40,000 h
LEDEUS00082D30	White	2,420 lm	15°	21,170 cd	32 W	220 - 240 V	85	40,000 h
LEDEUS00083D30	White	2,370 lm	25°	10,970 cd		220 - 240 V	85	40,000 h
LEDEUS00084D30	White	2,340 lm	35°	4,885 cd		220 - 240 V	85	40,000 h
<b>LIGHT HEAD - NEUTRAL WHITE</b>								
LEDEUS00072D40	White	1,700 lm	15°	14,830 cd	22 W	220 - 240 V	85	40,000 h
LEDEUS00073D40	White	1,700 lm	25°	8,700 cd		220 - 240 V	85	40,000 h
LEDEUS00074D40	White	1,600 lm	35°	3,700 cd		220 - 240 V	85	40,000 h
LEDEUS00082D40	White	2,600 lm	15°	22,780 cd	32 W	220 - 240 V	85	40,000 h
LEDEUS00083D40	White	2,550 lm	25°	11,800 cd		220 - 240 V	85	40,000 h
LEDEUS00084D40	White	2,520 lm	35°	5,260 cd		220 - 240 V	85	40,000 h
LEDEUS00063C	Installation frame for 1 Light head / White / Ceiling cut-out: 200 x 200 mm							
LEDEUS00066C	Installation frame for 2 Light heads / White / Ceiling cut-out: 200 x 337 mm							
LEDEUS00069C	Installation frame for 3 Light heads / White / Ceiling cut-out: 200 x 468 mm							

Exists also in black and silver. Please see our website or contact your representative for further information. Additional High CRI filter available as accessory (see page 41)




## NEOACCENT Extractable

Individual shop architectures, diverse colour concepts and different ceiling designs: NEOACCENT Extractable recessed spotlights, with their two different colour temperatures, three housing colours and optional High CRI Filter, can be integrated perfectly into any retail space. Meanwhile, the light head's ability to be rotated and pivoted ensures optimum flexibility, even where space is limited. In addition, the Extractable spotlights can always be combined with the other products in the NEOACCENT series to create integrated lighting concepts.


### FEATURES

- Dimmable: Yes / DALI
- Protection rating: IP20
- Temperature range: 5 °C – 35 °C
- Independent driver included
- Lighting head swivels out 45°, rotates 360°


### LIGHT DISTRIBUTION



### DIMENSIONS



### CUT-OUT



### DIMMABLE



	FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>									
	LEDEUS00027D30	White	1,600 lm	15°	13,830 cd	22 W	220 - 240 V	85	40,000 h
	LEDEUS00028D30	White	1,600 lm	25°	8,000 cd		220 - 240 V	85	40,000 h
	LEDEUS00029D30	White	1,500 lm	35°	3,300 cd		220 - 240 V	85	40,000 h
	LEDEUS00036D30	White	2,420 lm	15°	21,170 cd	32 W	220 - 240 V	85	40,000 h
	LEDEUS00037D30	White	2,370 lm	25°	10,970 cd		220 - 240 V	85	40,000 h
	LEDEUS00038D30	White	2,340 lm	35°	4,885 cd		220 - 240 V	85	40,000 h
<b>NEUTRAL WHITE</b>									
	LEDEUS00027D40	White	1,700 lm	15°	14,830 cd	22 W	220 - 240 V	85	40,000 h
	LEDEUS00028D40	White	1,700 lm	25°	8,700 cd		220 - 240 V	85	40,000 h
	LEDEUS00029D40	White	1,600 lm	35°	3,700 cd		220 - 240 V	85	40,000 h
	LEDEUS00036D40	White	2,600 lm	15°	22,780 cd	32 W	220 - 240 V	85	40,000 h
	LEDEUS00037D40	White	2,550 lm	25°	11,800 cd		220 - 240 V	85	40,000 h
	LEDEUS00038D40	White	2,520 lm	35°	5,260 cd		220 - 240 V	85	40,000 h

Exists also in black and silver. Please see our website or contact your representative for further information.  
Additional High CRI filter available as accessory (see page 41)



## NEOACCENT CRI Filter

Please find here an indication of the colour rendition values when using the additional high CRI filter, as well as detailed photometric information:

	CCT (K)	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
22 W	3000 K	3,000	85	82	91	98	83	83	88	88	67	18	75	79	69	83	97	76
	3000 K with filter	3,060	96	98	97	89	94	99	96	97	97	87	89	94	83	99	92	98
	4000 K	4,000	85	84	90	94	83	83	86	88	71	29	78	82	66	87	97	81
	4000 K with filter	4,230	96	97	97	89	97	97	94	97	97	98	90	96	74	99	93	95
32 W	3000 K	3,000	85	82	91	98	83	83	88	88	67	18	75	79	69	83	97	76
	3000 K with filter	3,060	96	98	97	89	94	99	96	97	97	87	89	94	83	99	92	98
	4000 K	4,000	85	84	90	94	83	83	86	88	71	29	78	82	66	87	97	81
	4000 K with filter	4,230	96	97	97	89	97	97	94	97	97	98	90	96	74	99	93	95

	CCT (K)	LUMEN OUTPUT (lm)			CBCP (cd)			
		15°	25°	35°	15°	25°	35°	
22 W	3000 K	3,000	1,600	1,600	1,500	13,800	8,000	3,300
	3000 K with filter	3,060	1,215	1,215	1,140	10,210	5,920	2,440
	4000 K	4,000	1,700	1,700	1,600	14,830	8,700	3,700
	4000 K with filter	4,230	1,290	1,290	1,215	10,970	6,435	2,735
32 W	3000 K	3,000	2,420	2,370	2,340	21,170	10,970	4,885
	3000 K with filter	3,060	1,835	1,800	1,775	15,665	8,115	3,615
	4000 K	4,000	2,600	2,550	2,520	22,780	11,800	5,260
	4000 K with filter	4,230	1,975	1,935	1,915	16,855	8,730	3,890

DESCRIPTION	SIZE OF PACKAGING (L x H x W)	GROSS WEIGHT
<b>HIGH CRI FILTER</b>		
LEDEUSX0002	Box of 10 pcs.	150 x 150 x 100 mm 374 g




## E-CORE LED TRACKLIGHT 1200

This elegant spotlight range stands for demanding lighting solutions with its high-tech components. Whether for the high-quality presentation of goods or for displaying art, the spectrum of different colour and reflected beam characteristics offers exemplary creative leeway. The excellent colour reproduction makes it a suitable substitute for previous applications of 20 W HID lamps. As a chip-on-board design, the appealing eye-catcher ups the ante in the quality stakes with a multi shadow-free spotlight, the greatest power density and optimised thermo-management.


### FEATURES

- Dimmable: No
- Electrical class: I
- Protection rating: IP20
- Temperature range: 5 °C – 35 °C
- ENEC
- Twist & Lock cover
- With 3-circuit universal adapter


### LIGHT DISTRIBUTION



### DIMENSIONS



### DIMENSIONS



	FINISH	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)
<b>WARM WHITE</b>									
LEDEUS00006N30	White	3000 K	1,000 lm	40°	2,200 cd	21 W	220 - 240 V	80	40,000 h
LEDEUS00005N30	White		1,100 lm	22°	4,700 cd	21 W	220 - 240 V	80	40,000 h
<b>NEUTRAL WHITE</b>									
LEDEUS00006N40	White	4000 K	1,300 lm	40°	2,600 cd	21 W	220 - 240 V	80	40,000 h
LEDEUS00005N40	White		1,300 lm	22°	5,600 cd	21 W	220 - 240 V	80	40,000 h

Exists also in black and silver. Please contact your representative for further information.

LEDEUSX0001 Colour rendering improvement filter (R9)

COLOUR RENDERING	Ra	R9
3000 K	80	32
3000 K with filter	90	94
4000 K	80	24
4000 K with filter	87	92




## GIMBAL TRACK SPOT111

The multitalented gimbal for row lighting systems. Like its mounting pendants, the spotlight relies on the intense-beam AR111 E-CORE illuminants and its gimbal mounting ensures limitless freedom in use. The harmonious union of the light and illuminant are convincing thanks to their masterful radiation and they guarantee excellent structural integration.


### FEATURES

- Applicable lamp: E-CORE AR111
- Dimmable: No
- Protection rating: IP20
- Temperature range: 5 °C – 35 °C
- With 3-circuit universal adapter


### LIGHT DISTRIBUTION



### DIMENSIONS




### DIMENSIONS



	FINISH	RATED VOLTAGE	FREQUENCY	BASE
<b>FIXTURE</b>				
LEDEUS00001C	White	230 - 240 V	50 Hz	G53
LEDEUS00002C	Silver			
LEDEUS00003C	Black			

AR111 lamp to be ordered separately (see pages 68/69)

Our AR111 10,5W and AR111 14,5W offer a wide range of colour temperatures, beam angles and wattages.



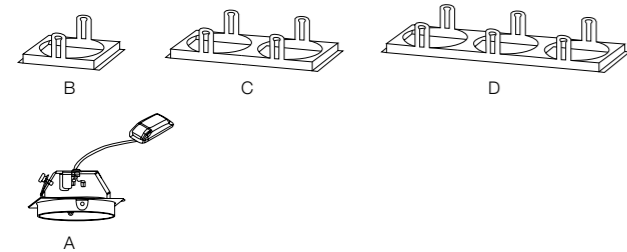


### GIMBAL RECESSED SPOT111

As a logical addition to the TRACK SPOT the RECESSED SPOT111 is the perfect downlight insert solution. It creates a discrete lighting architecture – even with low ceilings – and allows you to design the ceilings whichever way you like. The modular structure of this system has room for up to three spots. In this way you create an individual, friendly and balanced lighting atmosphere in shops, hotels and restaurants.

**FEATURES**

- Applicable lamp: E-CORE AR111
- Dimmable: No
- Protection rating: IP20
- Temperature range: 5 °C – 35 °C



DESCRIPTION	FINISH	CEILING CUTOUT (mm)	RATED VOLTAGE	FREQUENCY	BASE
<b>FIXTURE</b>					
LEDEUS00013C	Lamp Fitting (A)	White	-	-	-
LEDEUS00014C	including SELV transformer	Silver	230 - 240 V	50 Hz	G53
LEDEUS00015C	Frame for 1 Lamp Fitting (B)	White	-	-	-
LEDEUS00016C		Silver	-	-	-
LEDEUS00017C	Frame for 2 Lamp Fitting (C)	White	-	-	-
LEDEUS00018C		Silver	-	-	-
LEDEUS00019C	Frame for 3 Lamp Fitting (D)	White	-	-	-
LEDEUS00020C		Silver	-	-	-

AR111 lamp to be ordered separately (see pages 68/69)  
 Our AR111 10,5W and AR111 14,5W offer a wide range of colour temperatures, beam angles and wattages.

## Spotlights

### NEOACCENT Tracklight



22/32 W - up to 2,600 lm  
 warm or neutral white  
 3000 K/4000 K  
 40,000 hours life (L70)  
 beam angle 15°/25°/35°  
 with 3-circuit universal adapter  
 dimmable on gear box

### E-CORE LED TRACKLIGHT 1200



21 W - up to 1,300 lm  
 warm or neutral white  
 3000 K/4000 K  
 40,000 hours life (L70)  
 beam angle 22°/40°  
 with 3-circuit universal adapter

### NEOACCENT Battery



22/32 W - up to 2,600 lm  
 warm or neutral white  
 3000 K/4000 K  
 40,000 hours life (L70)  
 beam angle 15°/25°/35°  
 frame for 1/2/3 lamp fittings  
 DALI controllable

### GIMBAL TRACK SPOT111



fixture for 3-circuit tracks  
 white / silver / black  
 base G53  
 for E-CORE AR111

### NEOACCENT Extractable



22/32 W - up to 2,600 lm  
 warm or neutral white  
 3000 K/4000 K  
 40,000 hours life (L70)  
 beam angle 15°/25°/35°  
 DALI controllable

### GIMBAL RECESSED SPOT111



fixture for recessed installation  
 frame for 1/2/3 lamp fittings  
 white / silver  
 base G53  
 for E-CORE AR111

# Lamps

## LED - lighting for all moods

It is time to change because conventional incandescent lamps are a thing of the past. With the modern E-CORE LED lamps from Toshiba, you can create the atmosphere you want in the private and commercial sector - indoors and outdoors.

With all the advantages that LED lamps offer you:

- ⊕ Very low energy consumption
- ⊕ Extremely long life
- ⊕ Low heat production
- ⊕ Shock and vibration resistant








### E-CORE GLS WIDE 13W

With 1,060 lumen, Toshiba's design classic is way ahead from an aesthetic and performance perspective. As a lamp with an intense beam of the retrofit segment, it is the substitute for all fields of application of 75 W bulbs. Its broad reflected beam angle makes it the ideal light source even for large rooms – in brief: powerful, elegant and unbeatably efficient.

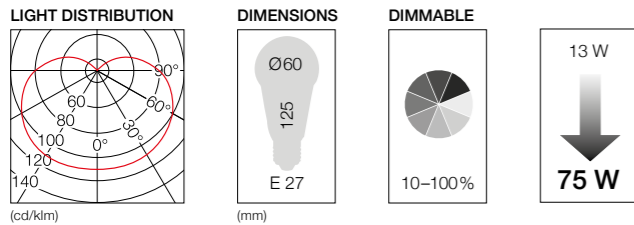


	COLOUR TEMPERATURE	LUMINOUS FLUX	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>								
LDAEU004C2710D	2700 K	1,060 lm	13 W	220 - 240 V	> 80	25,000 h	E27	A+



### E-CORE GLS WIDE 10,5W

The new version of the popular archetype offers light in a familiar shape. However, this is the perfect product to replace the very popular 60 W incandescent bulb. With 806 lm, a warm color temperature and a good dimming capability this lamp offers the most comfortable ambience at your place.

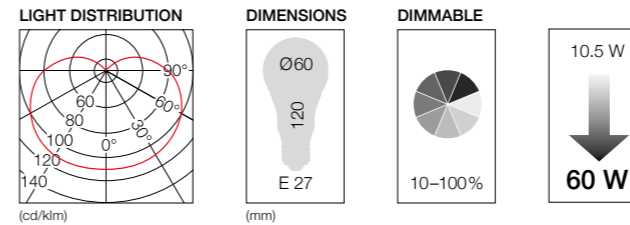


	COLOUR TEMPERATURE	LUMINOUS FLUX	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>								
LDAEU003C2710D	2700 K	806 lm	10.5 W	220 - 240 V	> 80	25,000 h	E27	A+



### E-CORE GLS WIDE 7W

Less is more. A real light source whose design combines efficiency with classically styling. However, its revolutionary inner workings marry minimal technology and the maximum angle of radiation perfectly. A light that can be seen.

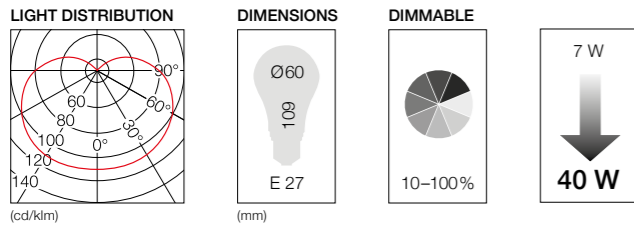


	COLOUR TEMPERATURE	LUMINOUS FLUX	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>								
LDAEU007C2710D	2700 K	470 lm	7 W	220 - 240 V	> 80	25,000 h	E27	A+
<b>NEUTRAL WHITE</b>								
LDAEU007C4010D	4000 K	500 lm	7 W	220 - 240 V	> 80	25,000 h	E27	A+

Dimmable on suitable dimmers. Please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting).



### E-CORE SPHERICAL E27

The E-CORE SPHERICAL E27 combines compact shape and tremendous decorative specifications. Up to 470 lm it will fit perfectly all your nice and small fittings.

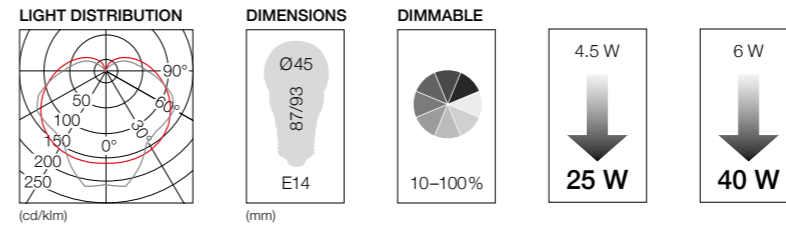

	COLOUR TEMPERATURE	LUMINOUS FLUX	FINISH	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>									
LDG007D2760DEU	2700 K	• 270 lm	frosted	4.5 W	220 - 240 V	> 80	20,000 h	E27	A+
LDG009D2760DEU		• 250 lm	clear	4.5 W	220 - 240 V	> 80	20,000 h		A+
LDG011D2760DEU		• 470 lm	frosted	6 W	220 - 240 V	> 80	20,000 h		A+

Dimmable on suitable dimmers. Please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting).




240° Light Distribution



### E-CORE CANDLE

With its faceted crystal optics, the E-CORE CANDLE is a real head-turner. Smooth dimming, this light is the magic every chandelier needs.

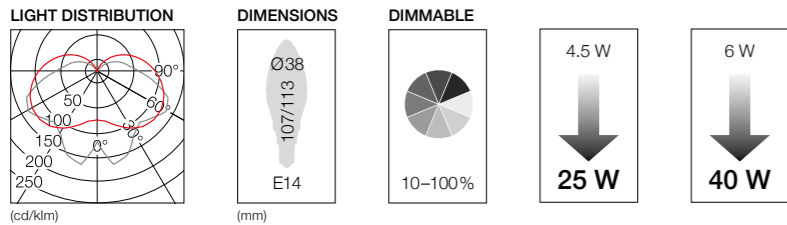


	COLOUR TEMPERATURE	LUMINOUS FLUX	FINISH	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	DISTRIBUTION	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDC004D2760DEU	2700 K	• 270 lm	frosted	4.5 W	220 - 240 V	> 80	20,000 h	200°	E14	A+
LDC005D2760DEU		• 250 lm	clear	4.5 W	220 - 240 V	> 80	20,000 h	200°		A+
LDC006D2760DEU		• 470 lm	frosted	6 W	220 - 240 V	> 80	20,000 h	240°		A+



### E-CORE SPHERICAL E14

This is what the master of directed accent lighting looks like: dimmable and compact in size, the ideal light source for ambient lighting.

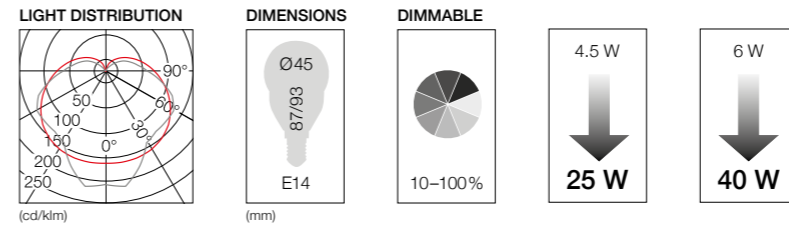


	COLOUR TEMPERATURE	LUMINOUS FLUX	FINISH	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	DISTRIBUTION	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDG006D2760DEU	2700 K	• 270 lm	frosted	4.5 W	220 - 240 V	> 80	20,000 h	200°	E14	A+
LDG008D2760DEU		• 250 lm	clear	4.5 W	220 - 240 V	> 80	20,000 h			A+
LDG010D2760DEU		• 470 lm	frosted	6 W	220 - 240 V	> 80	20,000 h			A+



## E-CORE HIGH LUMEN TUBE

E-CORE HIGH LUMEN TUBE is your best partner for tube relamping project in any high ceiling applications. Thanks to its high lumen output and its incredible efficiency it enables to save a big amount of energy without compromising on light level and quality.

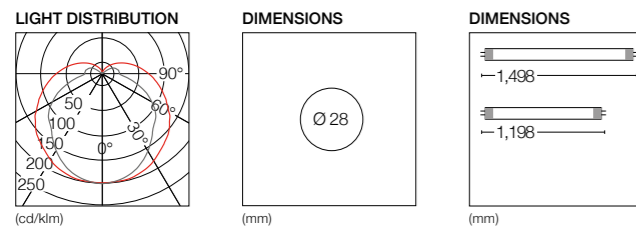


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	SIZE (mm)	ENERGY LABEL
<b>WARM WHITE</b>									
LDL002D3074-EU	3000 K	2,160 lm	160°	23 W	220 - 240 V	> 80	40,000 h	1,198	A+
LDL002D3075-EU		2,700 lm	160°	24 W	220 - 240 V	> 80	40,000 h	1,498	A+
<b>NEUTRAL WHITE</b>									
LDL002D4074-EU	4000 K	2,400 lm	160°	23 W	220 - 240 V	> 80	40,000 h	1,198	A+
LDL002D4075-EU		3,000 lm	160°	24 W	220 - 240 V	> 80	40,000 h	1,498	A++
<b>COOL WHITE</b>									
LDL002D6574-EU	6500 K	2,400 lm	160°	23 W	220 - 240 V	> 80	40,000 h	1,198	A+
LDL002D6575-EU		3,000 lm	160°	24 W	220 - 240 V	> 80	40,000 h	1,498	A++



## LED TUBE

The LED TUBE lets you perfectly light up large rooms and offices. It will ensure bright light and a low consumption of energy. It is available either in neutral white or cold white, in 800 to 2,300 lm.

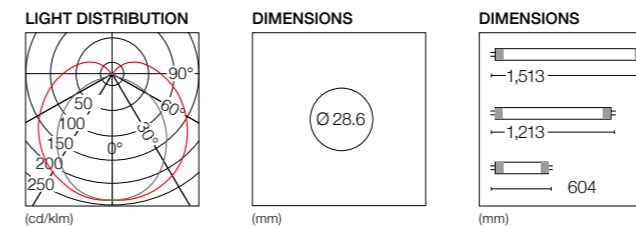

	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	SIZE (mm)	ENERGY LABEL
<b>NEUTRAL WHITE</b>									
LDL003D4072EU	4000 K	800 lm	150°	9 W	220 - 240 V	80	40,000 h	604	A+
LDL003D4074EU		1,700 lm	150°	18 W	220 - 240 V	80	40,000 h	1,213	A+
LDL003D4075EU		2,100 lm	150°	23 W	220 - 240 V	80	40,000 h	1,513	A+
<b>COOL WHITE</b>									
LDL003D6572EU	6500 K	900 lm	150°	9 W	220 - 240 V	80	40,000 h	604	A+
LDL003D6574EU		1,800 lm	150°	18 W	220 - 240 V	80	40,000 h	1,213	A+
LDL003D6575EU		2,300 lm	150°	23 W	220 - 240 V	80	40,000 h	1,513	A+

# Energy efficient lighting solutions

## It is time to upgrade

All over the world, solutions are being sought for efficient use of energy. One key area is lighting. In Europe, its share in total energy consumption is about 14%.

Already back in 2008, Toshiba announced the cessation of the production of conventional incandescent lamps because their energy efficiency is too low - they only reach efficiency classes D, E, F and G.

And in 2010, Toshiba actually ceased manufacturing incandescent lamps worldwide.

Since then, we have replaced incandescent lamps with modern LED lamps in almost all areas of lighting. Their low energy consumption and optimal light quality and excellent design make the transition so simple.

No matter where you need light, there is an energy-and cost-saving solution using Toshiba LED lamps and luminaires. Check for yourself, because this is the only way we can achieve the ambitious goals of energy reduction.

## So simply take advantage of LED

Save on the cost of electricity - with our LED lamps and luminaires, this can be up to 85%.

Your investment will pay for itself sooner than you think. Modern LED lighting solutions offer a very long operating life. They pay for themselves over a very short period of time.

You also avoid the heat of conventional incandescent lamps. And, depending on the number of incandescent lamps used, this reduces the need for additional cooling.

And, you reduce unnecessary CO2 pollution of our environment.

Thus, we are in a position to do something ourselves - for ourselves and for the environment.

Let's enter our world!

# Did you know?

## What are Lumens?

Lumen (or Luminous flux) is the standard measure for the amount of light emitted by a light source.

Unlike light intensity (Candela), Lumens is a measure of the amount of light rather than its intensity.

## How do I compare incandescent lamp using Lumens?

Using the table below you can see the Lumen values to be reached by LED Lamps and their incandescent equivalent (for non-directional lamp, as defined by EC244/2009).

## Equivalence ratings for non-directional lamps (EC244/2009)

Rated lamp luminous flux $\phi$ [lm]			Claimed equivalent incandescent lamp power
CFL	Halogen	LED and other lamps	
125	119	136	15 W
229	217	249	25 W
432	410	470	40 W
741	702	806	60 W
970	920	1,055	75 W
1,398	1,326	1,521	100 W
2,253	2,137	2,452	150 W
3,172	3,009	3,452	200 W

## Watts vs Lumens – Which should I use?

Lumens are the new way to measure and compare the light output from a lamp. Wattage is a measure of power consumed not light delivered. As lights are designed to emit light, the correct measurement is Lumen.

With LEDs it is not necessarily the wattage that tells you if it is more powerful than another LED lamp. Two LED lamps with the same wattage could have different Lumen values. To adequately compare the two lamps it is best compare Lumen output.

LED offers a true alternative to incandescent lamps and the drawbacks of other existing technologies.

LED lamps last longer, are more efficient, can be dimmed, and switch on instantly.

# Reflector Lamps

## The freedom to set the tone

Lighting offers so many possibilities for the illumination of spaces, scenes and objects. With the rich variety of our reflector lamps, you can set the tone you want.


Whether as a ceiling or wall spotlight - Toshiba reflector lamps are available with various beam angles at the desired lighting levels and with plug-in or bayonet plugs. Just as you please.





## E-CORE PAR16 9W

These elegant mains voltage spotlights with robust GU10 base shine with their excellent energy-saving credentials and ease of use. Suitable for a multitude of uses, they can be dimmed to offer atmospheric lighting or daylight-brightness accents – even at considerable distance. That is in brief the best-in-class lumen and light quality in the GU10 world.

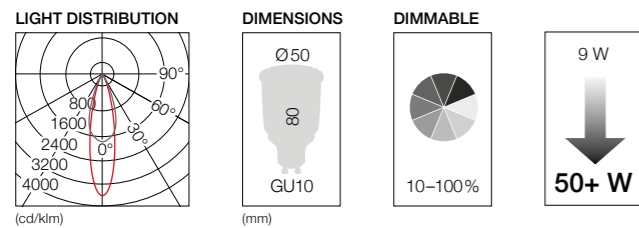


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDRC0927MU1EUD2	2700 K	520 lm	25°	• 1,900 cd	9 W	220 - 240 V	> 80	40,000 h	GU10	A
LDRC0927WU1EUD2			40°	• 950 cd						
LDRC0930MU1EUD2	3000 K	550 lm	25°	• 2,000 cd	9 W	220 - 240 V	> 80	40,000 h	GU10	A
LDRC0930WU1EUD2			40°	• 1,000 cd						
<b>NEUTRAL WHITE</b>										
LDRC0940MU1EUD2	4000 K	580 lm	25°	• 2,000 cd	9 W	220 - 240 V	> 80	40,000 h	GU10	A+
LDRC0940WU1EUD2			40°	• 1,000 cd						

Dimmable product: please see the compatibility list available on our webpage. [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



## E-CORE PAR16 8W

The E-CORE PAR16 8W sets a new standard among LED GU10 lamps. Thanks to its compact size and the high lumen output, this lamp will enable tremendous energy savings and intense light in all kinds of applications.

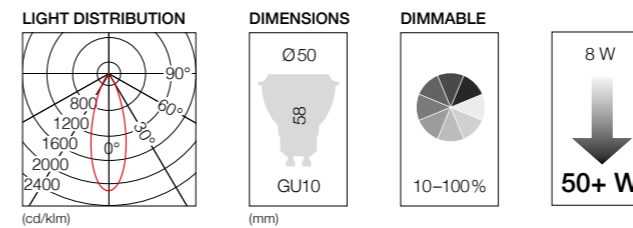


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDP006D27M40DEU	2700 K	460 lm	36°	1,000 cd	8 W	220 - 240 V	> 80	25,000 h	GU10	A
LDP006D27W40DEU			60°	500 cd						
LDP006D30M40DEU	3000 K	460 lm	36°	1,000 cd	8 W	220 - 240 V	> 80	25,000 h	GU10	A
LDP006D30W40DEU			60°	500 cd						
<b>NEUTRAL WHITE</b>										
LDP006D40M40DEU	4000 K	460 lm	36°	1,000 cd	8 W	220 - 240 V	> 80	25,000 h	GU10	A
LDP006D40W40DEU			60°	500 cd						

Dimmable product: please see the compatibility list available on our webpage. [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



## E-CORE PAR16 7W

The new E-CORE PAR16 7W is the perfect product to replace any 50 W GU10 halogen lamp and saves up to 86% energy. The wide range that includes different beam angles and color temperatures will adapt to all the installation requirements.

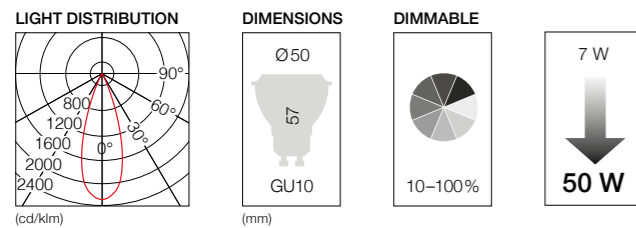


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDP005D27M40DEU	2700 K	350 lm	36°	800 cd	7 W	220 - 240 V	> 80	25,000 h	GU10	A
LDP005D27W40DEU			60°	400 cd						
LDP005D30M40DEU	3000 K	350 lm	36°	800 cd	7 W	220 - 240 V	> 80	25,000 h	GU10	A
LDP005D30W40DEU			60°	400 cd						
<b>NEUTRAL WHITE</b>										
LDP005D40M40DEU	4000 K	350 lm	36°	800 cd	7 W	220 - 240 V	> 80	25,000 h	GU10	A
LDP005D40W40DEU			60°	400 cd						

Dimmable product: please see the compatibility list available on our webpage. [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



## E-CORE PAR16 4,5W

The E-CORE PAR16 4,5W is here to replace the halogen GU10 lamps of 35 W. On top of that the product is now dimmable to create nice and cosy ambiances.

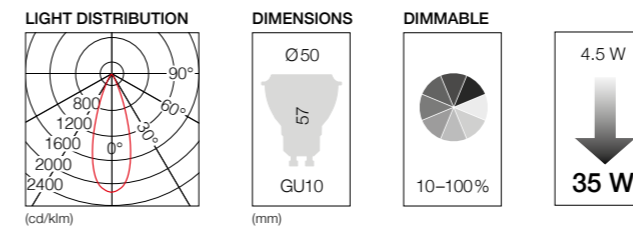

	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDP004D27M40DEU	2700 K	230 lm	36°	500 cd	4.5 W	220 - 240 V	> 80	25,000 h	GU10	A+
LDP004D30M40DEU			60°	500 cd						
<b>NEUTRAL WHITE</b>										
LDP004D40M40DEU	4000 K	230 lm	36°	500 cd	4.5 W	220 - 240 V	> 80	25,000 h	GU10	A+


Dimmable product: please see the compatibility list available on our webpage. [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)





## E-CORE MR16 7,5W

The new E-CORE MR16 7,5W despite its compact size offers 450 lm. It combines brightness and energy savings. As dimmable and available in different beam angles (up to 60°) it will convert itself into your best partner for any relamping projects with GU5.3 lamps.

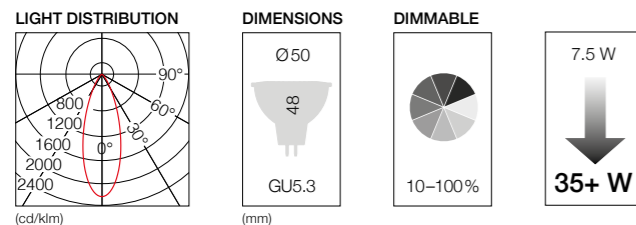


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDM005A27M30DEU	2700 K	450 lm	36°	1,000 cd	7.5 W	12 V	> 80	25,000 h	GU5.3	A
LDM005A27W30DEU			60°	500 cd						
LDM005A30M30DEU	3000 K	450 lm	36°	1,000 cd	7.5 W	12 V	> 80	25,000 h	GU5.3	A
LDM005A30W30DEU			60°	500 cd						
<b>NEUTRAL WHITE</b>										
LDM005A40M30DEU	4000 K	450 lm	36°	1,000 cd	7.5 W	12 V	> 80	25,000 h	GU5.3	A
LDM005A40W30DEU			60°	500 cd						

Dimmable product: please see the compatibility list available on our webpage. [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)  
SELV 12V transformers: please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



## E-CORE MR16 6,5W

The new E-CORE MR16 6,5W lamp reaches 345 lm. As dimmable, it will replace easily any 35W halogen GU5.3 lamp and enables you to save up to more than 80% energy.

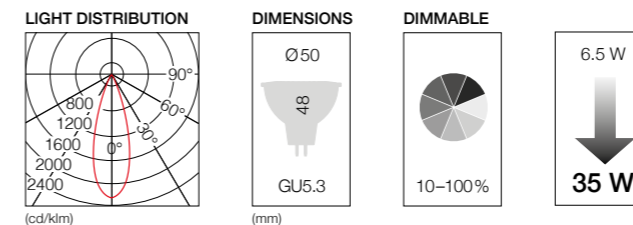


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDM004A27M30DEU	2700 K	350 lm	36°	800 cd	6.5 W	12 V	> 80	25,000 h	GU5.3	A
LDM004A30M30DEU			60°	800 cd						
<b>NEUTRAL WHITE</b>										
LDM004A40M30DEU	4000 K	350 lm	36°	800 cd	6.5 W	12 V	> 80	25,000 h	GU5.3	A

Dimmable product: please see the compatibility list available on our webpage. [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)  
SELV 12V transformers: please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



## E-CORE MR16 5,2W

Thanks to the 40,000 hours that offers this lamp, it will suit any kinds of high maintenance application that include GU5.3 25 W halogen lamps.

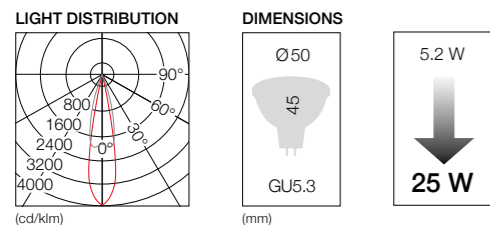


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDRA0527MU5EU3	2700 K	280 lm	25°	• 1,200 cd	5.2 W	12 V	> 80	40,000 h	GU5.3	A
LDRA0527WU5EU3			35°	• 650 cd						
LDRA0530MU5EU3	3000 K	290 lm	25°	• 1,250 cd	5.2 W	12 V	> 80	40,000 h	GU5.3	A
LDRA0530WU5EU3			35°	• 700 cd						
<b>NEUTRAL WHITE</b>										
LDRA0540MU5EU3	4000 K	300 lm	25°	• 1,250 cd	5.2 W	12 V	> 80	40,000 h	GU5.3	A
LDRA0540WU5EU3			35°	• 700 cd						

SELV 12V transformers: please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



## E-CORE MR16 4,6W

The E-CORE MR16 4,6W is the perfect replacement for halogen GU5.3 20W lamps. The different color temperatures will enable you to create the right lighting ambience your installation needs.

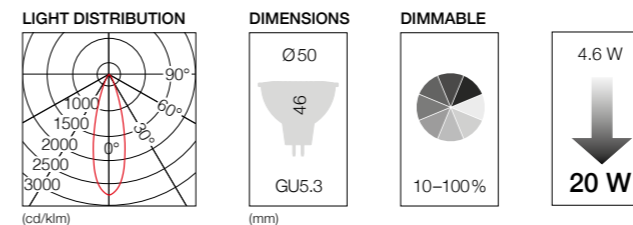


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDM003A27M30DEU	2700 K	230 lm	36°	650 cd	4.6 W	12 V	> 80	25,000 h	GU5.3	A
LDM003A30M30DEU	3000 K	230 lm	36°	650 cd						
<b>NEUTRAL WHITE</b>										
LDM003A40M30DEU	4000 K	230 lm	36°	650 cd	4.6 W	12 V	> 80	25,000 h	GU5.3	A

Dimmable product: please see the compatibility list available on our webpage. [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)  
SELV 12V transformers: please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



### E-CORE AR111 14,5W

Thanks to the light quality, the light intensity and the beam angle variety, this range is the ideal solution to replace AR111 halogen lamps. It will convert any space into the most appealing one.

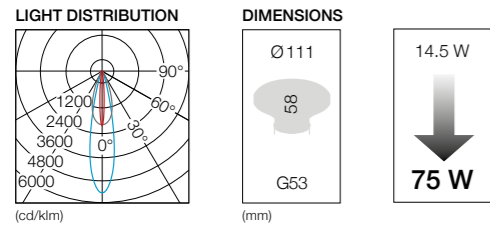


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDREU002A27NA0	2700 K	• 810 lm	8°	16,000 cd	14.5 W	12 V	80	40,000 h	G53	A
LDREU002A27MA0		• 810 lm	24°	4,500 cd						
LDREU002A27WA0	3000 K	• 810 lm	40°	1,600 cd	14.5 W	12 V	80	40,000 h	G53	A
LDREU002A30NA0		• 860 lm	8°	16,700 cd						
LDREU002A30MA0		• 860 lm	24°	4,700 cd						
LDREU002A30WA0		• 860 lm	40°	1,700 cd						
<b>NEUTRAL WHITE</b>										
LDREU002A40NA0	4000 K	• 920 lm	8°	17,900 cd	14.5 W	12 V	80	40,000 h	G53	A
LDREU002A40MA0		• 920 lm	24°	5,000 cd						
LDREU002A40WA0		• 920 lm	40°	1,800 cd						

SELV 12V transformers: please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting).



### E-CORE AR111 10,5W

The AR111 pin-base lamps are in a class of their own in the low-voltage sector: pure luminosity for downlights, gimbal and catenary lights. Their potential for savings is also as eye catching as it is impressive.

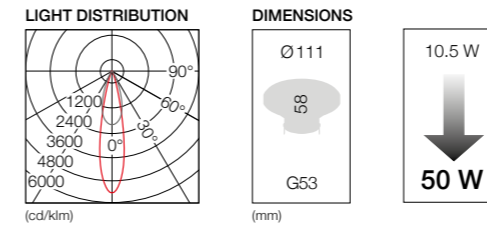


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDREU001A27MA0	2700 K	• 600 lm	24°	3,400 cd	10.5 W	12 V	80	40,000 h	G53	A
LDREU001A27WA0		• 600 lm	40°	1,200 cd						
LDREU001A30MA0	3000 K	• 640 lm	24°	3,600 cd	10.5 W	12 V	80	40,000 h	G53	A
LDREU001A30WA0		• 640 lm	40°	1,300 cd						
<b>NEUTRAL WHITE</b>										
LDREU001A40MA0	4000 K	• 690 lm	24°	3,800 cd	10.5 W	12 V	80	40,000 h	G53	A
LDREU001A40WA0		• 690 lm	40°	1,300 cd						

SELV 12V transformers: please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting).



## E-CORE PAR38 18,8W

If you need even more light, then you can choose the E-CORE PAR38 18,8W. With 980 lm, its wide range of colour temperatures and a service life of up to 40,000 hours makes it a true all-rounder.

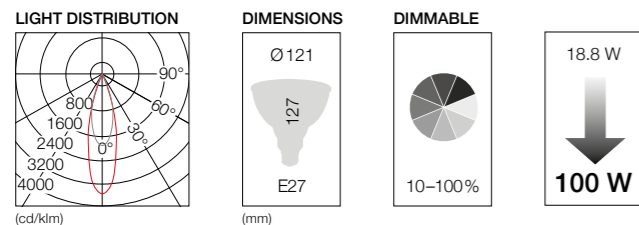


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDRC1627ME7EUD2	2700 K	950 lm	25°	• 3,200 cd	18.8 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC1627WE7EUD2			35°	• 1,650 cd						
LDRC1630ME7EUD2	3000 K	980 lm	25°	• 3,300 cd	18.8 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC1630WE7EUD2			35°	• 1,700 cd						
<b>NEUTRAL WHITE</b>										
LDRC1640ME7EUD2	4000 K	980 lm	25°	• 3,300 cd	18.8 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC1640WE7EUD2			35°	• 1,700 cd						
<b>COOL WHITE</b>										
LDRC1665ME7EUD2	6500 K	980 lm	25°	• 3,300 cd	18.8 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC1665WE7EUD2			35°	• 1,700 cd						

Dimmable on suitable dimmers. Please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



## E-CORE PAR30 14W

It can be used in almost all areas: Since you will receive the E-CORE PAR30 14W in warm white, neutral white and cold white. It can be dimmed and equipped with an E27 screw base to work as a high-voltage reflector lamp.

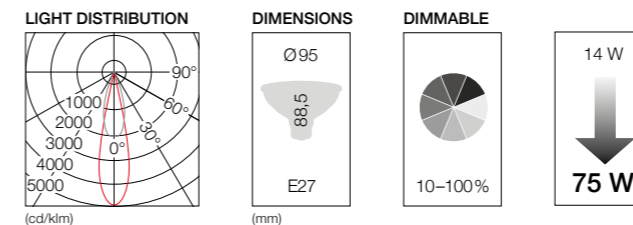


	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDRC1327ME7EUD	2700 K	770 lm	23°	• 3,400 cd	14 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC1327WE7EUD			32°	• 1,500 cd						
LDRC1330ME7EUD	3000 K	780 lm	23°	• 3,400 cd	14 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC1330WE7EUD			32°	• 1,600 cd						
<b>NEUTRAL WHITE</b>										
LDRC1340ME7EUD	4000 K	780 lm	23°	• 3,400 cd	14 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC1340WE7EUD			32°	• 1,600 cd						
<b>COOL WHITE</b>										
LDRC1365ME7EUD	6500 K	780 lm	23°	• 3,400 cd	14 W	220 - 240 V	> 65	40,000 h	E27	A
LDRC1365WE7EUD			32°	• 1,600 cd						

Dimmable on suitable dimmers. Please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



### E-CORE PAR20 9W

The E-CORE PAR range's performance class, beam distribution characteristics and light quality leave no lighting wish unanswered. With its high efficiency, it provides the suitable way in to contemporary room lighting.

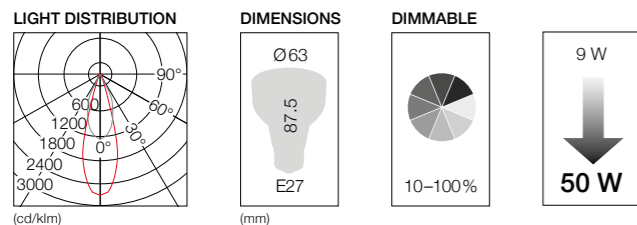

	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	LUMINOUS INTENSITY	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	ENERGY LABEL
<b>WARM WHITE</b>										
LDRC0927ME7EUD	2700 K	370 lm	25°	• 950 cd	9 W	220 - 240 V	> 80	40,000 h	E27	A
LDRC0927WE7EUD			40°	• 450 cd						
<b>NEUTRAL WHITE</b>										
LDRC0940WE7EUD	4000 K	380 lm	40°	• 460 cd	9 W	220 - 240 V	> 80	40,000 h	E27	A

Dimmable on suitable dimmers. Please see compatibility list at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)

## Commission Regulation EU No 1194/2012

# The Ecodesign Directive

Europe is taking another step on the road to an energy-efficient future. With this purpose in mind, the EU issued the ErP Directive 2009/125/EC for energy-related products in 2009.

It is up to all of us to live up to this ambitious objective, which is why the EU is giving this responsibility to both consumers and manufacturers.


The Directive also outlines the changeover from non-directional lighting such as light bulbs for private use to energy-saving alternatives. Commission Regulation EU No 1194/2012 has been in force since September 1st 2013.

With its lamps, Toshiba is offering a range of products that is 100% ErP-compliant. All our products already hold the „greenest“ energy efficiency ratings, A, A+ or A++.

This Directive introduces regulations for lamps with directional light and comes along with a new one for lamp packaging (EU/874/2012). The focus of the ErP Directive is our environment and the best way to look after it.

Even though the consumer will have to get used to working with different units - lumens instead of Watts - the new Directive will make a considerable contribution to the ecological protection of our environment. We are pleased to be making this journey with you.

### Equivalence table for directional lamps

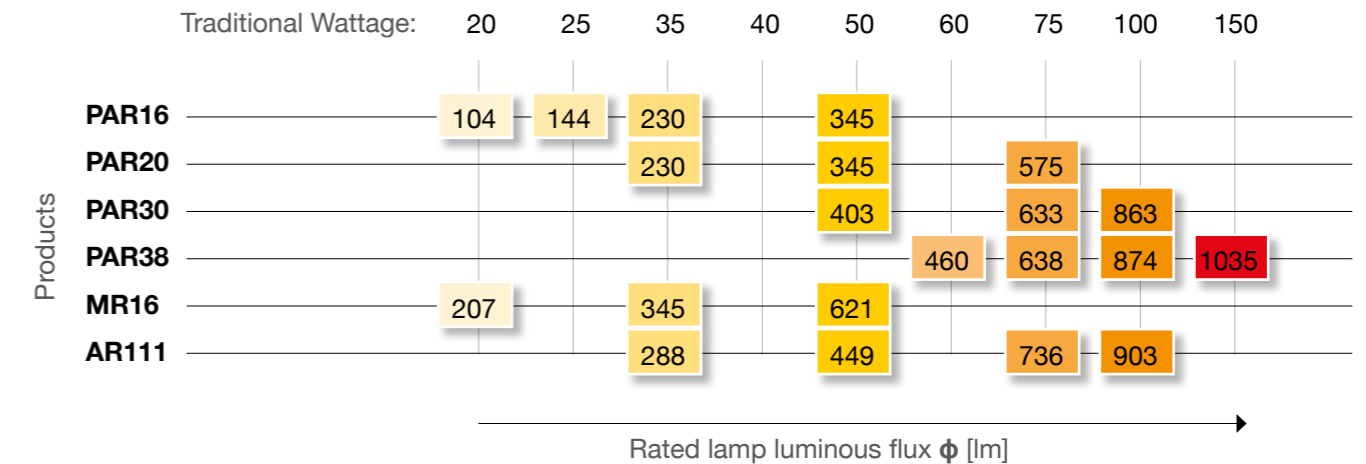

The energy efficiency label, in force since September 1st 2013, introduces the two new energy efficiency ratings A+ and A++. The older, lower classes F and G have been discontinued.

# Modules

## Optimal lighting conditions, minimal energy consumption.

In public spaces in particular, such as offices, presentation areas, and production sites, LED technology provides an important contribution to the environmental friendliness of your company. Here, Toshiba has just the right solution for every requirement – LED modules that can be easily integrated into your lighting system.

Depending on your requirements, these also come with dimmer drivers, allowing you not only to adjust your lighting conditions but also to optimise your heat management. No matter which solution you opt for, with our LED modules you not only provide the best possible lighting conditions for your company but also contribute to climate protection.

# E-CORE LED TUBE GX16t-5

**An innovation is conquering offices, presentation areas, and production sites.**

Toshiba leads the field when it comes to environmental protection. So it is no surprise that the E-CORE LED TUBE GX16t-5 impress through top performance and are competitively priced.

It's the ideal time for a switch-over – don't you think?



## Every feature of the E-CORE LED TUBE GX16t-5 represents a good investment:

- + Their 40,000-hour lifespan is double that of conventional fluorescent lamps.
- + An external LED driver ensures especially high performance.
- + The modules can be easily integrated into your existing lighting system.
- + They impress thanks to an approximately 1.7 x greater lumen output than conventional LED lamps with integrated drivers.

## THE LED evolution for professionals.

The E-CORE LED TUBE GX16t-5 are more than just a competitively priced entry-level model. Their output and optimal performance are just as impressive as other innovative LED concepts from Toshiba. And because their fittings are identical to those of conventional fluorescent lamps, using them is particularly easy.

Do you wish to present your sales area in an impressive way? This is also easily achieved with the E-CORE LED TUBE GX16t-5, because they are available in all lengths and a great variety of colours.

The choice is yours! Choose modern LED technology that is durable, highly efficient, and that features full luminance immediately after being switched on.




External LED driver



### E-CORE LED TUBE GX16t-5

The E-CORE LED TUBE GX16t-5 is the perfect linear module to upgrade the linear fluorescent fixtures to LED. This module has been designed for manufacturers willing to implement LED technology at an affordable cost. Available in all lengths and many colour temperatures of traditional linear lamps, it enables to keep the same fixture bodies and makes the switch to LED very easy. As it works with a separated Toshiba driver, the light flux can be dimmed and it prevents from many disadvantages of other solutions like heat management or over load risks.

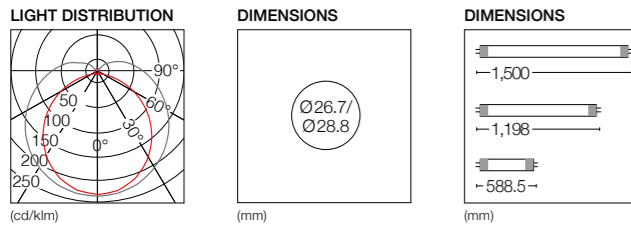


	COLOUR TEMPERATURE	LUMINOUS FLUX	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	DIAMETER (mm)	SIZE (mm)	ENERGY LABEL
<b>WARM WHITE</b>									
LDL82D1530X1EU	3000 K	1,550 lm	14.5 W	45 - 190 V	83	40,000 h	26.7	588.5	A+
LDL84D2830X1EU	3000 K	3,100 lm	28 W	45 - 190 V	83	40,000 h	26.7	1,198	A+
LDL95D3630X1EU	3000 K	3,800 lm	36 W	90 - 190 V	83	40,000 h	28.8	1,500	A+
<b>NEUTRAL WHITE</b>									
LDL82D1540X1EU	4000 K	1,650 lm	14.5 W	45 - 190 V	83	40,000 h	26.7	588.5	A+
LDL84D2840X1EU	4000 K	3,300 lm	28 W	45 - 190 V	83	40,000 h	26.7	1,198	A+
LDL95D3640X1EU	4000 K	4,000 lm	36 W	90 - 190 V	83	40,000 h	28.8	1,500	A+
<b>COOL WHITE</b>									
LDL84D2865X1EU	6500 K	3,350 lm	28 W	45 - 190 V	83	40,000 h	26.7	1,198	A+
LDL95D3665X1EU	6500 K	4,000 lm	36 W	90 - 190 V	83	40,000 h	28.8	1,500	A+

Working on separated driver: LEK-3301CA02, LEK-3301CA02D, LEK-330S02CA02, LEK-330S02CA02D  
Please see connection details at [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)



### E-CORE GX53-1

This LED MODULE is compact and offers a great light output. Use this module with GX53-1 socket in your creations and get an economical and sustainable light source.

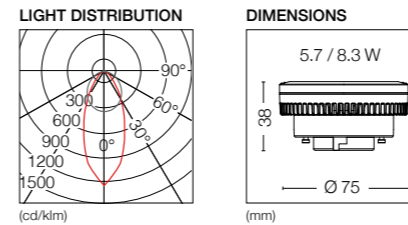

	COLOUR TEMPERATURE	LUMINOUS FLUX	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE
<b>WARM WHITE</b>								
LDFEU009C27M50D	2700 K	• 510 lm	40°	5.7 W	220 - 240 V	80	40,000 h	GX53-1
LDFEU009C27W50D		• 510 lm	100°					
LDFEU010C27M50D	2700 K	• 700 lm	40°	8.3 W	220 - 240 V	80	40,000 h	GX53-1
LDFEU010C27W50D		• 700 lm	100°					
<b>NEUTRAL WHITE</b>								
LDFEU009C40M50D	4000 K	• 550 lm	40°	5.7 W	220 - 240 V	80	40,000 h	GX53-1
LDFEU009C40W50D		• 550 lm	100°					
LDFEU010C40M50D	4000 K	• 750 lm	40°	8.3 W	220 - 240 V	80	40,000 h	GX53-1
LDFEU010C40W50D		• 750 lm	100°					



# Toshiba LED LIGHT ENGINE

## A revolutionary new LED light source designed around the LED to maximise performance and efficiency

LED LIGHT ENGINE enables you to make choices with your lighting, and change your mind later.

This interchange ability allows you to extend the possibilities of your lit space and easily change the look and feel of the room depending on what you are lighting.

LIGHT ENGINE is a lamp in the traditional sense of the word.

- ⊕ You don't need to attach a driver.
- ⊕ You don't need to add optical controls.

## Concept

LIGHT ENGINE from Toshiba has been designed as an evolution to conventional lighting to maximise the potential of LED and provide long life, high efficiency, instant light and higher luminous flux.


LIGHT ENGINE is a new generation of replaceable light sources, using LED. Just as you would replace your fluorescent tube, the LIGHT ENGINE too can be replaced or exchanged. This means that you do not have to replace the entire luminaire should the LED fail but simply untwist the old lamp and replace it.



## Design for Life and Efficiency

Without effective thermal management, LEDs will not operate well and could fail prematurely or operate inefficiently. The LIGHT ENGINE has been designed to take all that worry off your shoulders.

With its 40 mm cross-sectional silicon heat pad, the LIGHT ENGINE ensures that all the heat generated is driven directly to the heatsink, away from the LED chip.

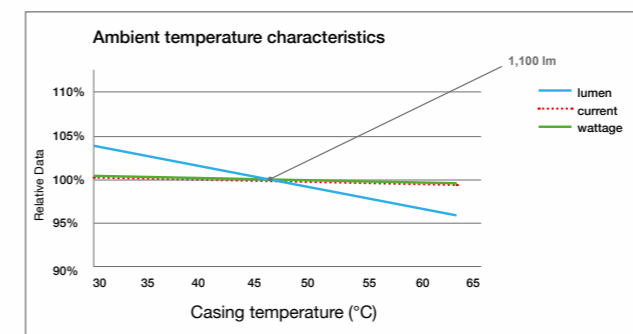

Note: The values above is the relation of T<sub>c</sub> and engines' specifications where the product is turned on the following conditions:  
 · the input voltage is 230 V  
 · base-up positioned

LIGHT ENGINE uses a special connector that presses the LIGHT ENGINE's silicon heat pad down with exact pressure to the heatsink to ensure a good thermal connection with no air gaps.

LIGHT ENGINE offers 40,000 hours of life (L70), that's up to 4 times longer than CFL, dramatically reducing maintenance costs.

Delivering 91 lm/W, the LIGHT ENGINE offers high light output without draining your wallet. Combined with its dimming capabilities, the LIGHT ENGINE is the perfect choice for efficient, flexible, low energy lighting.


## Reduce Investment Risk

TOSHIBA LED LIGHT ENGINE is a future-proof solution. Indeed through this engine, we created a new standardized socket: GH76p-5. Thus, the LED engine becomes a lamp allowing end-users to upgrade their luminaires with the latest technology.



## E-CORE LED LIGHT ENGINE 2

The unusual LED LIGHT ENGINE 2 from Toshiba offers creative users unlimited opportunities for a large number of lighting solutions. Depending on the application, you have a choice between different beam angles and luminous fluxes. The LIGHT ENGINE 2 is easy and safe to assemble.

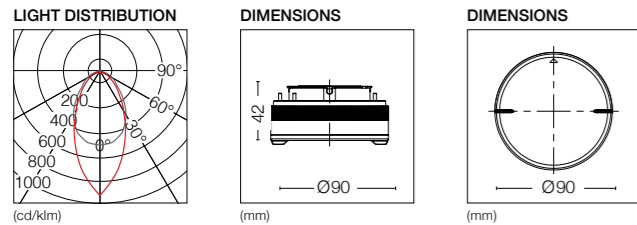


	COLOUR TEMPERATURE	LUMINOUS FLUX	USEFUL OUTPUT	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	DIMMABLE
<b>WARM WHITE</b>										
LEV112313M830E	3000 K	• 1,020 lm	• 765 lm	50°	12.7 W	220 - 240 V	> 80	40,000 h	GH76p-5	No
LEV112313W830E		• 1,020 lm	• 690 lm	80°		220 - 240 V	> 80	40,000 h		
LEV162318M830E		• 1,480 lm	• 1,110 lm	50°	17.5 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV162318W830E		• 1,480 lm	• 965 lm	80°		220 - 240 V	> 80	40,000 h		
LEV222324M830E		• 2,040 lm	• 1,465 lm	50°	24 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV222324W830E		• 2,040 lm	• 1,285 lm	80°		220 - 240 V	> 80	40,000 h		
<b>NEUTRAL WHITE</b>										
LEV112313M840E	4000 K	• 1,100 lm	• 825 lm	50°	12.7 W	220 - 240 V	> 80	40,000 h	GH76p-5	No
LEV112313W840E		• 1,100 lm	• 745 lm	80°		220 - 240 V	> 80	40,000 h		
LEV162318M840E		• 1,600 lm	• 1,200 lm	50°	17.5 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV162318W840E		• 1,600 lm	• 1,045 lm	80°		220 - 240 V	> 80	40,000 h		
LEV222324M840E		• 2,200 lm	• 1,580 lm	50°	24 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV222324W840E		• 2,200 lm	• 1,390 lm	80°		220 - 240 V	> 80	40,000 h		



## E-CORE LED LIGHT ENGINE DALI

The LED LIGHT ENGINE from Toshiba is the perfect module to development LED downlight systems and to adapt them to all the application requirements thanks to the wide range and the DALI dimming capability.

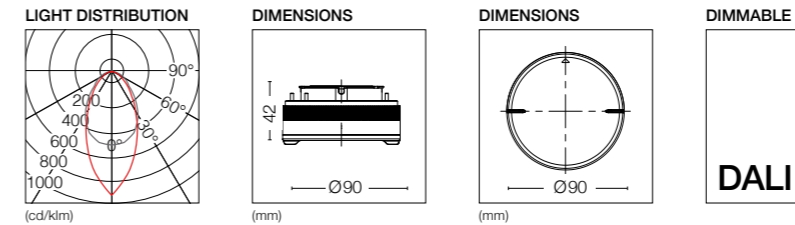


	COLOUR TEMPERATURE	LUMINOUS FLUX	USEFUL OUTPUT	BEAM ANGLE	WATTAGE	VOLTAGE 50/60 Hz	Ra (min)	LIFESPAN (L70)	BASE	DIMMABLE
<b>WARM WHITE</b>										
LEV112313M830ME	3000 K	• 1,020 lm	• 765 lm	50°	12.9 W	220 - 240 V	> 80	40,000 h	GH76p-5	0 / 5-100%
LEV112313W830ME		• 1,020 lm	• 690 lm	80°		220 - 240 V	> 80	40,000 h		
LEV162318M830ME		• 1,480 lm	• 1,110 lm	50°	17.8 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV162318W830ME		• 1,480 lm	• 965 lm	80°		220 - 240 V	> 80	40,000 h		
LEV222324M830ME		• 2,040 lm	• 1,465 lm	50°	24.2 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV222324W830ME		• 2,040 lm	• 1,285 lm	80°		220 - 240 V	> 80	40,000 h		
<b>NEUTRAL WHITE</b>										
LEV112313M840ME	4000 K	• 1,100 lm	• 825 lm	50°	12.9 W	220 - 240 V	> 80	40,000 h	GH76p-5	0 / 5-100%
LEV112313W840ME		• 1,100 lm	• 745 lm	80°		220 - 240 V	> 80	40,000 h		
LEV162318M840ME		• 1,600 lm	• 1,200 lm	50°	17.8 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV162318W840ME		• 1,600 lm	• 1,045 lm	80°		220 - 240 V	> 80	40,000 h		
LEV222324M840ME		• 2,200 lm	• 1,580 lm	50°	24.2 W	220 - 240 V	> 80	40,000 h	GH76p-5	
LEV222324W840ME		• 2,200 lm	• 1,390 lm	80°		220 - 240 V	> 80	40,000 h		

DC capability: Yes

## DIMMABILITY

### Dimming of lights

**DIMMABLE** LED lights can be dimmed without sacrificing light quality. This is the main difference from lights fitted with fluorescent or high-pressure discharge lamps. Dimming also saves more energy. There are different types of dimming.




### DALI

**DIMMABLE** Luminaires are controlled by the digital DALI (Digital Addressable Lighting Interface). This standard, adopted by all manufacturers, overcomes the disadvantages of the 1 – 10 V principle and is being used increasingly, particularly in more complex installations. DALI offers a two-wire line that is protected against polarity reversal, with noise-resistant digital signal transmission, direct addressability, compact instruction set, error feedback and defined brightness values which are independent of line length. DALI is also supported by building and light management systems.



### 1 – 10 V

**DIMMABLE** Luminaires can be dimmed via the 1 – 10 V interface. A voltage level between 1 V and 10 V is converted into corresponding lamp brightness.



### Phase control


Phase control widely used for incandescent and halogen lamps dimming this analogic control method apply also to LED lamps. Because there is no general compatibility between all dimmers available on the market, Toshiba has provided a list of recommended dimmers on its website [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting).

## CONSTANT LUMEN OUTPUT


### Constant luminous flux over the life of the lamp

The drop in luminous flux due to the LED technology over the service life of the system is compensated by increasing the power input. This results in constant and uniform photometric performance differentiating strongly TOSHIBA products from standard LED systems whose lumen output drastically drops over time lighting.

**WITH CONSTANT LUMEN OUTPUT**  
=> STABLE PHOTOMETRIC PERFORMANCE  
OPTIMUM POWER CONSUMPTION

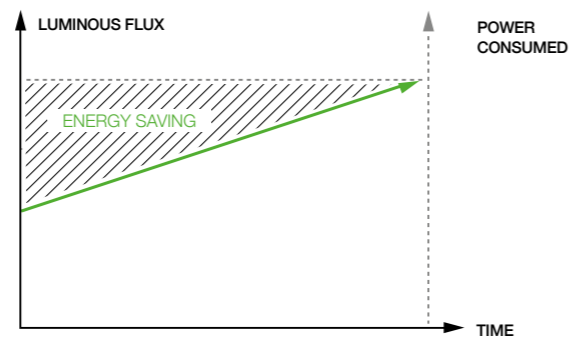


**WITHOUT CONSTANT LUMEN OUTPUT**  
=> DECREASING PHOTOMETRIC PERFORMANCE  
ENERGY WASTE

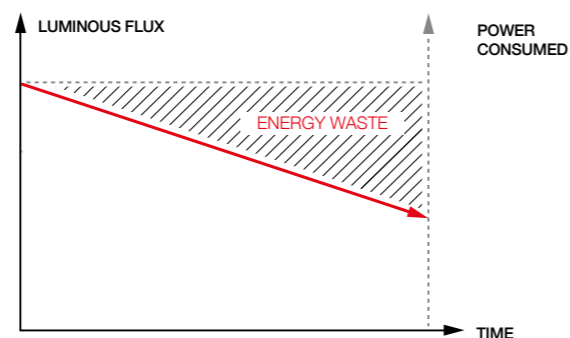

### Basic Photometric Units

There are several photometric base quantities in the definition of light sources, which characterise different qualities.


#### LUMINOUS FLUX (Phi/lm)



#### Luminous flux $\phi$ in lm (Lumen)

The total radiating power emitted by a light source, which the eye perceives as light.


#### LUMINOUS INTENSITY (I/cd)



#### Luminous intensity I in cd (candela)

The luminous flux of a light source per solid angle. With the same luminous flux, the light intensity increases the more the light source focuses the light.

#### ILLUMINANCE (E/lx)



#### Illuminance E in lx (Lux)


A measure of lighting power per lit surface. A minimum luminance is specified for many visual tasks and must be considered in the planning of the visual task and choice of light source.

### Colour Rendering Index Ra

Colour Rendering Index (CRI) is a measure of how well a light source is able to accurately reproduce colours of objects being lit respective to the colour temperature (CCT) of the light source. The higher the colour rendering index, the more naturally the colours of an object are reproduced and therefore perceived by the observer. The sun has the highest CRI of 100. Most artificial light source are below that. The colour rendering index is determined using 8 standardised test colour references.

### Dimmability by trailing edge phase control

**DIMMABLE** Luminaires can be dimmed very easily using trailing edge phase control. The advantage of trailing edge phase control compared with circuits in which the voltage is controlled by a resistance is that they have a very low power loss and are widely used in existing installations. The main disadvantage of trailing edge phase control is the non-sinusoidal current profile. Because current and voltage do not have the same shape, so-called distortion reactive power occurs. Shifting the current backwards compared with the voltage curve has the same effect as an inductive load, which electricity supply companies can only tolerate at low power levels. Leading edge phase control is not recommended for Toshiba lamps. Because there is no general compatibility between all dimmers available on the market, Toshiba has provided a list of recommended dimmers on its website [www.toshiba.eu/lighting](http://www.toshiba.eu/lighting).



### Colour temperature (K Kelvin)


Colour temperature is a measure of the colour effect of a light source. Colour temperature is defined as the temperature of a black body which belongs to a particular light colour of this emission source.

Typical colour temperatures for light sources are:

- below 3300 K = warm white, preferred for interior lighting
- 3300 K to 5300 K = neutral white, typical light colour for office, industrial and exterior lighting
- above 5300 K = cool white, especially common in exterior lighting.


### L70 service life of LED light sources

LEDs are characterised by their excellent service life. Because LEDs hardly ever fail completely, the service life is defined as having an L70 value. Their useful life is considered to be over when the luminous flux has dropped to 70% of the initial luminous flux. After this time the LEDs age at a dramatically accelerated rate. The service life of an LED light source is not set by the LEDs alone, the other electrical components and the thermal design are also a factor. Therefore the given service life varies from product to product.

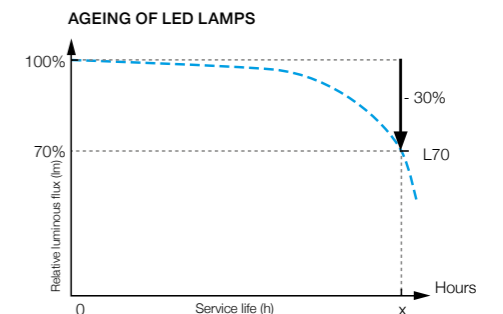


### Power factor $\lambda = \cos \phi$

The LED light sources need driver modules to operate which act capacitively from an electrical point of view. This leads to a phase shift between voltage and current consumption and consequently the apparent power S (given in Volt Amperes VA) has an effective power P (Watts) and a reactive power Q (Volt Ampere reactive VAR). The relationship between effective power P and apparent power S is represented as the power factor  $\lambda$ .

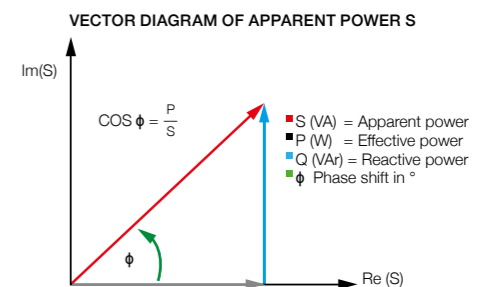

**TOSHIBA**  
Leading Innovation >>>

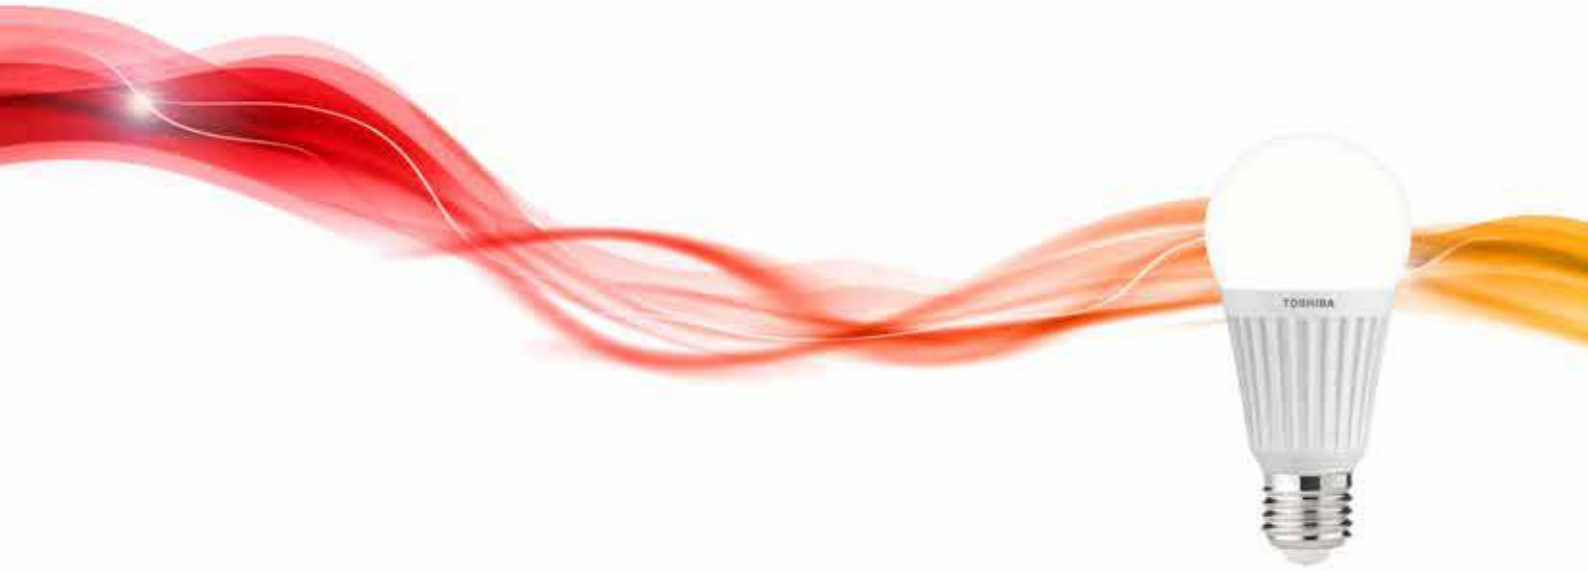

[www.toshiba.eu/lighting](http://www.toshiba.eu/lighting)

Specifications and design as of november 2014.  
Specifications and design may change without further notice.

PP\_ENG\_11/14

**E-CORE™**  
LED Lighting