

## **TECHNOLOGY DATA SHEET & SPECIFICATIONS**

MODEL: 2534R1D-KHC-E

#### **Features**

'High efficiency

Low Power consumption

General purpose leads

'Selected minimum intensities

'Available on tape and reel

'Pb free



The series is specially designed for applications requiring higher brightness

The LED lamps are available with different colors, intensities, epoxy colors, etc

Superior performance in outdoor environment

### **Usage Notes:**

Surge will damage the LED

When using LED, it must use a protective resistor in series with DC current about 20mA

## **Applications**

Status indicators

'Commercial use

Advertising Signs

Back lighting






## **TECHNOLOGY DATA SHEET & SPECIFICATIONS**

MODEL: 2534R1D-KHC-E

### **Device Selection Guide**

LED Part No.	Cr	nip	Lens Color	
	Material	Emitted Color		
2534R1D-KHC-E	AlGalnP	Red	Diffused	

## **Package Dimensions**

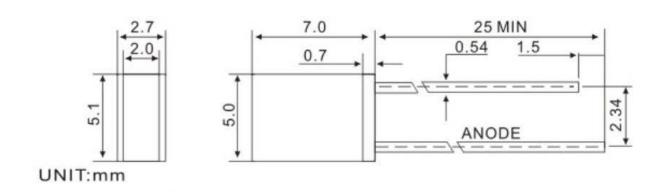

#### Notes:

Other dimensions are in millimeters, tolerance is 0.25mm except being specified.

Protruded resin under flange is 1.5mm Max LED.

Bare copper alloy is exposed at tie-bar portion after cutting.



## **TECHNOLOGY DATA SHEET & SPECIFICATIONS**

**MODEL: 2534R1D-KHC-E** 

## **Electro-Optical Characteristics (Ta=25**□)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition
Luminous Intensity	lv	500		1000	mcd	IF=20mA(Note1)
Viewing Angle	2θ <sub>1/2</sub>		120		Deg	(Note 2)
Peak Emission Wavelength	λр	620		635	nm	IF=20mA
Spectral Line Half-Width	Δλ	15	20	25	nm	IF=20mA
Forward Voltage	V <sub>F</sub>	1.9		2.3	V	IF=20mA
Reverse Current	I <sub>R</sub>			10	μA	VR=5V

#### Note:

- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- 2.  $\theta$ 1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.



## **TECHNOLOGY DATA SHEET & SPECIFICATIONS**

#### MODEL: 2534R1D-KHC-E

### **Typical Electro-Optical Characteristics Curves**

Relative Intensity VS. Wavelength


(n e) 0.8


0.6


0.6


0.700


Wavelength (nm)













## **TECHNOLOGY DATA SHEET & SPECIFICATIONS**

**MODEL: 2534R1D-KHC-E** 

#### **Notes**

- 1. Above specification may be changed without notice. HYLED will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. HYLED assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- These specification sheets include materials protected under copyright of HYLED corporation. Please don't reproduce or cause anyone to reproduce them without HYLED's consent.