

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

- UL Standard
 1. Rated voltage/current : 300V / 8A
 2. Withstanding voltage : AC1600V/1Min.
 3. Torque value : M2 , 1.77Lb.in
 4. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A

2. Torque value : M2 , 0.2N·m
 3. Wire range : 0.5~1.5mm²



NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 3.5/3.81mm, Poles : N=02~24P
 3. Stripping length : 6~7mm
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:


Pitch range in mm		Nominal dimension range in mm						0.1/10
TO	Over TO	Over TO	Over TO	Over TO	Over TO	Over TO	0.1/10	
6	6 TO 10	10 TO 24	30 TO 30	60 TO 60	100 TO 100	150 TO 150	<	
	±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	
							±2*	

6. RoHS Compliance



15EDGK - 3.5/3.81 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Color): 1.(Grey)
 (Single Pitch) 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)



2.15
2.30
3.5
3.81
3.5x(N-1)
3.81x(N-1)
3.5x(N-1)+4.3
3.81x(N-1)+4.6



02~06P have this card point

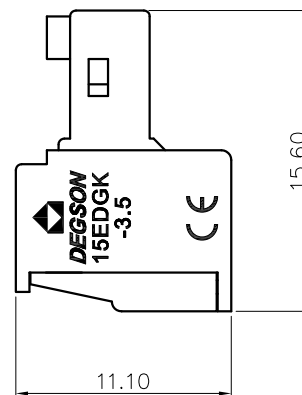

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	THIRD ANGLE PROJECTION		DRAWING NO.:		/
		MM (INCH)		DO NOT SCALE DRAWING	
		TITLE: CUSTOMER DRAWING		REV	DO
				SHEET	1/1
				SCALE	1:1

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

15EDGK-3.5/3.81-XXP-1Y-00A(H)

CUSTOMER DRAWING

REV DO

DRAWING NO.:

/

SHEET 1/1

MM (INCH)

DO NOT SCALE DRAWING

SCALE 1:1