



产品规格书



MOTOR MODEL(摩打型号):F-M4-15751-3(CN10859-2)

Print Date:08/10/2015

MOTOR OUTLINES(摩打结构图):


MOTOR PHOTO:

DIRECTION OF ROTATION

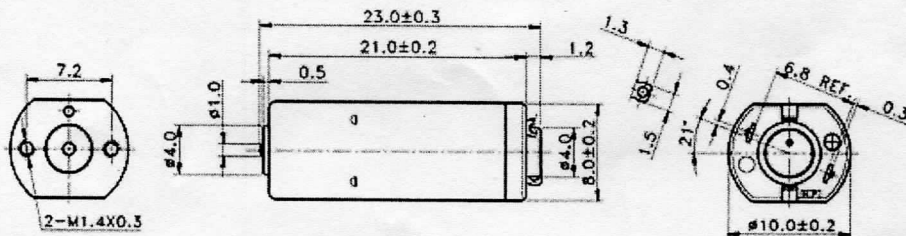

WEIGHT:5g(APPROX)

UNIT:mm



MOTOR TECHNICAL DATA(摩打技术数据):

MODEL 型号	VOLTAGE(电压)		RATED LOAD(额定负载)	TESTING COITIONS (测试条件)
	OPERATING RANGE 操作范围	NOMINAL 额定电压	CURRENT 电 流 A	
F-M4-15751-3	1.5-4.5V	3.0V	0.12MAX 最大值	用手的拇指与食指捏住电机导线 (距电机端盖约2cm处)
GENERAL TEST TOLERANCE 正常测试公差				

Standard Testing Condition(标准测试条件):

Temperature 20±5°C,relative humidity 65±15% | Parameters should be measured after motor has been running for 20 seconds

温度20±5°C,相对湿度65±15% | 马达参数必须于马达运作20秒后方可以进行测试

备注: 加内置偏心轮Φ4.5*5mm

Hold wire position by hand
when test motor
current
(20mm from end cap side)

PRODUCE BY(制作人):

INSPECT BY(审核人):

CONFIRM BY(确认人):