


Hochleistungs-Spezialbohrer

aus neuem verschleißfestem Hartmetall, lange Ausführung, mit Schaft-Ø 1/8" (3,175 mm), Gesamtlänge 1 1/2" (38 mm), rechtsschneidend


High performance special drills

in new wear resisting solid carbide, long type, shank dia. 1/8" (3,175 mm), total length 1 1/2" (38 mm), right-hand cut

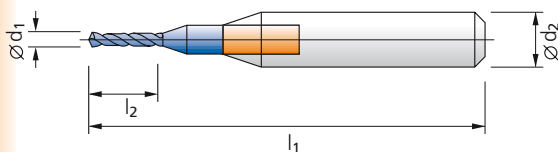

CNS Ø 0,55 – 1,20 mm


d ₁ mm	l ₂ mm	d ₂ mm	l ₁ mm
0,55	7,0	3,175	38
0,55	8,5	3,175	38
0,60	7,0	3,175	38
0,60	8,5	3,175	38
0,65	7,0	3,175	38
0,65	8,5	3,175	38
0,70	10,5	3,175	38
0,75	10,5	3,175	38
0,80	10,5	3,175	38
0,85	10,5	3,175	38
0,90	10,5	3,175	38
0,95	10,5	3,175	38
1,00	10,5	3,175	38
1,05	10,5	3,175	38
1,10	10,5	3,175	38
1,15	10,5	3,175	38
1,20	10,5	3,175	38



SBR Ø 1,25 – 3,175 mm



d ₁ mm	l ₂ mm	d ₂ mm	l ₁ mm
1,25	10,5	3,175	38
1,30	10,5	3,175	38
1,35	10,5	3,175	38
1,40	10,5	3,175	38
1,45	10,5	3,175	38
1,50	10,5	3,175	38
1,55	10,5	3,175	38
1,60	10,5	3,175	38
1,65	10,5	3,175	38
1,70	10,5	3,175	38
1,80	10,5	3,175	38
1,90	10,5	3,175	38
2,00	10,5	3,175	38
2,10	10,5	3,175	38
2,20	10,5	3,175	38
2,30	10,5	3,175	38
2,40	10,5	3,175	38
2,50	10,5	3,175	38
2,60	10,5	3,175	38
2,70	10,5	3,175	38
2,80	10,5	3,175	38
2,90	10,5	3,175	38
3,00	10,5	3,175	38
3,10	10,5	3,175	38
3,175	14,0	3,175	38




Hochleistungs-Spezialbohrer

lange Ausführung, mit Schaft-Ø 1/8" (3,175 mm),
Gesamtlänge 1 1/2" (38 mm), rechtsschneidend

High performance special drills

long type, shank dia. 1/8" (3,175 mm),
total length 1 1/2" (38 mm), right-hand cut

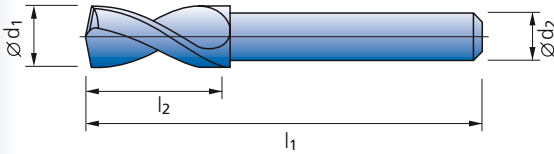

VHM Ø 3,20 – 10,00 mm

d1 mm	l2 mm	d2 mm	l1 mm	d1 mm	l2 mm	d2 mm	l1 mm
3,20	12	3,175	38	5,00	12	3,175	38
3,25	12	3,175	38	5,05	12	3,175	38
3,30	12	3,175	38	5,10	12	3,175	38
3,35	12	3,175	38	5,15	12	3,175	38
3,40	12	3,175	38	5,20	12	3,175	38
3,45	12	3,175	38	5,25	12	3,175	38
3,50	12	3,175	38	5,30	12	3,175	38
3,55	12	3,175	38	5,35	12	3,175	38
3,60	12	3,175	38	5,40	12	3,175	38
3,65	12	3,175	38	5,45	12	3,175	38
3,70	12	3,175	38	5,50	12	3,175	38
3,75	12	3,175	38	5,55	12	3,175	38
3,80	12	3,175	38	5,60	12	3,175	38
3,85	12	3,175	38	5,65	12	3,175	38
3,90	12	3,175	38	5,70	12	3,175	38
3,95	12	3,175	38	5,75	12	3,175	38
4,00	12	3,175	38	5,80	12	3,175	38
4,05	12	3,175	38	5,85	12	3,175	38
4,10	12	3,175	38	5,90	12	3,175	38
4,15	12	3,175	38	5,95	12	3,175	38
4,20	12	3,175	38	6,00	12	3,175	38
4,25	12	3,175	38	6,05	12	3,175	38
4,30	12	3,175	38	6,10	12	3,175	38
4,35	12	3,175	38	6,15	12	3,175	38
4,40	12	3,175	38	6,20	12	3,175	38
4,45	12	3,175	38	6,25	12	3,175	38
4,50	12	3,175	38	6,30	12	3,175	38
4,55	12	3,175	38	6,35	12	3,175	38
4,60	12	3,175	38	6,40	12	3,175	38
4,65	12	3,175	38	6,45	12	3,175	38
4,70	12	3,175	38	6,50	12	3,175	38
4,75	12	3,175	38	7,00	12	3,175	38
4,80	12	3,175	38	7,50	12	3,175	38
4,85	12	3,175	38	8,00	12	3,175	38
4,90	12	3,175	38	9,00	12	3,175	38
4,95	12	3,175	38	10,00	12	3,175	38

VHM Vollhartmetall / solid carbide

SBR Stahlschaft gelötet / steel shank brazed

CNS Stahlschaft gefügt / steel shank inserted