



HDB15 M

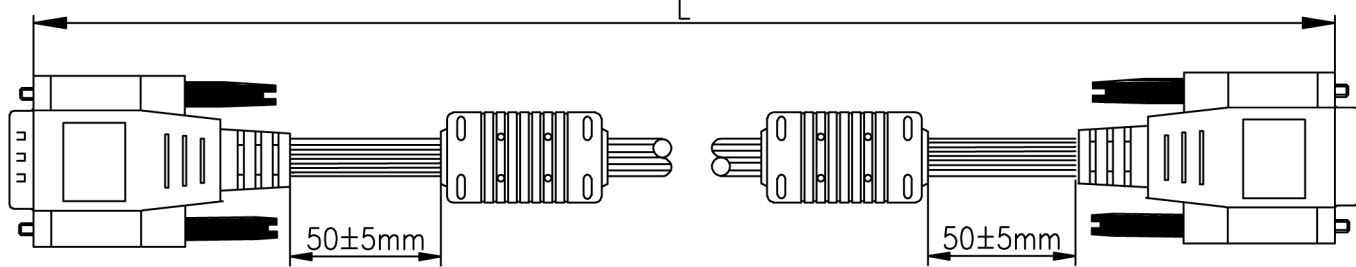

HDB15 F

NOTES:

1. MATERIALS

1.1 CABLE: [7/0.12TC*1C+7/0.12CCS+AM+PVC]*3COAX+(7/0.12CCS+PVC)*7C+AM+7/0.12CCS
+B(128/0.12ALM)+BLACK PVC JACKET

OD:8.2±0.2MM.

CABLE MARKING: E324703 AWM STYLE 2919 80°C 30V LOW VOLTAGE COMPUTER CABLE

1.2 P1: HDB 15PIN MALE: SOLDER TYPE, BLUE PBT

INSULATION, EMPTY NINE PIN, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.3 P2: HDB 15PIN FEMALE: SOLDER TYPE, BLUE PBT

INSULATION, GOLD FLASH CONTACTS, NICKEL PLATED SHELL;

1.4 HOOD MOLDED BLACK PVC.

1.5 THUMB SCREW TO BE MOLDED BLACK PVC.

1.6 FERRITE TO BE MOLDED BLACK PVC.







2 TESTING:100% OPEN AND SHORT TEST.

3. PACKING:1PCS/PE BAG.

4. ALL MATERIAL BE REACH COMPLIANT.

PIN OUT


P1 ——— P2





SHELL ——— DRAIN ——— SHELL

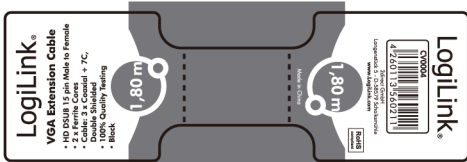

CUSTOMER NO	L (MM)	EAN code
CV0004	1800±50	4260113560211
CV0005	3000±70	4260113560228
CV0006	5000±70	4260113560235
CV0021	15000±200	4260113563007
CV0019	10000±150	4260113563014
CV0022	20000±300	4260113563021



Partone Cool Gray 9C
Partone 255C Black
Partone 255C Black
Partone 255C Black
Partone 255C Black

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME: 
ANGLE TOLERANCE: X° ± 3° .X° ± 1°	UNIT: mm	
VERSION: 00	PAGE: 1/1	

2direct GmbH		ENG: XIAO	
		PRODUCT NO:	CUSTOMER NO:
DRAWING NO: 1035	PRODUCT DESCRIPTION: VGA 3+7, HDB15P M/F+FERRITE		APPROVED:

00	NEW ISSUE	2014-09-06
REV.	MODIFY DESCRIPTION	DATE