


Vu+ SOLO²

Your **Smart Linux TV Player**

Der **Vu+ SOLO²** ist der erste FULL HD Twin Receiver der **Vu+** Gerätefamilie mit dem neuen 1,3GHz Dual-Core-Prozessor. Diese Rechengeschwindigkeit, verbunden mit Gigabit LAN und einem Twin-Tuner, eröffnet völlig neue Möglichkeiten der Nutzung. Funktionen, wie Web-Browser, HDTV PiP und Transcoding, erlauben hohe Konnektivität und Komfort. Streamen Sie erstmals auch HD Inhalte auf Ihr Android oder iOS Gerät.

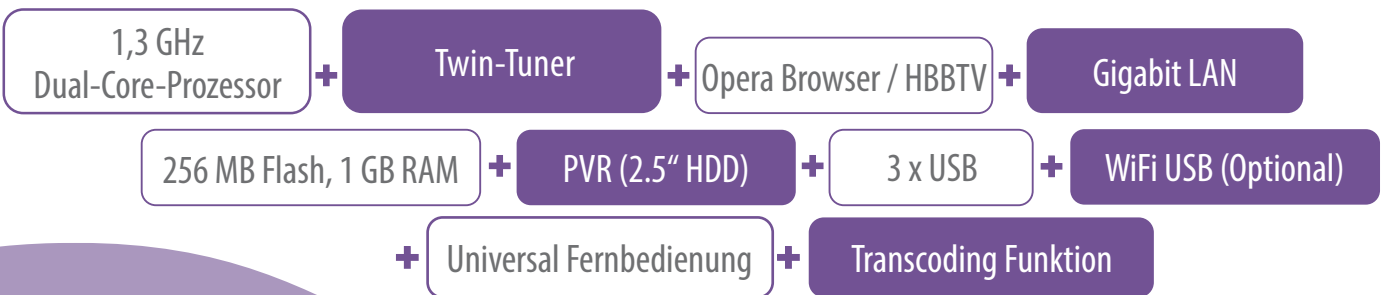

Vu⁺ SOLO²

Your **Smart** Linux TV Player



Technische Daten

Front Panel	Display	12-digit Dot Matrix display with status icons displaying channel names and program information
	USB 2.0	2
	Smart card slot	2
	Common Interface	1
Rear Panel	Key	"1 Touch"
	Power switch	1
	Sat-IF input/output	2 x F-type socket
	Connection TV	1 x Scart socket
	Video output (analogue)	1 x Cinch-socket
	Video/audio output (digital)	1 x HDMI
	Audio output (analogue)	2 x Cinch socket
	Audio output (digital)	Standard optical (SPDIF)
	USB 2.0	2
	Ethernet	1
RS 232	1	
Power	Mains voltage (external power supply)	100-250/50-60 V/Hz
	Power consumption (typ. operation/stand-by)	30 W/ 0,5 W
RF	RF range	950-2,150 MHz
	FEC, de-multiplexer	DVB-S/DVB-S2 Standard
Video	Video resolution	CCIR 601 (720 x 576 lines), 576p, 720p, 1080i, 1080p
	Video decoding	MPEG-2, MPEG-4 compatible
	Input data rate	2-45 MSymb/s
	S/N	>53 dB
Audio	Decoding	AC 3, MPEG-4 (AAC-HE), MPEG-1, Layer 1, 2 and 3
	Sampling rate	32/4.1/48 KHz
	S/N	>65 dB
LNB	LNB supply (horiz./vert.)	14/18; Max. 400 V/mA
	Control Signal	22kHz ; ToneBurst; DiSEqC 1.0/1.1/1.2 ; USALS
General	Dimensions (WxHxD)	280 x 50 x 200 mm
	Weight (without HDD)	2 kg

