



**NOTE:**


1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
2. FLUKE Channel TEST:  
TEST LIMIT:ISO11801 Channel Class E (Length≤50m)
3. Working temperature:-40℃~+65℃  
Storage temperature:-10℃~+50℃
4. RoHS3.0 AND REACH compliant
5. Spray WORD (White):LAN CABLE 24AWG/4PRS UTP TO TIA/EIA-568B.2 CAT6 FOR OUTDOOR ###762### 0001m .....

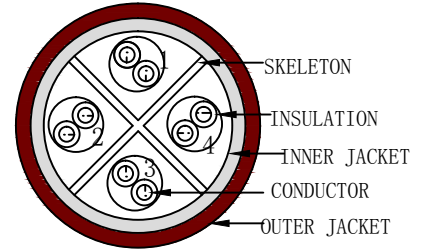


with neutral package, w/o other company's logo  
Crimping Tool

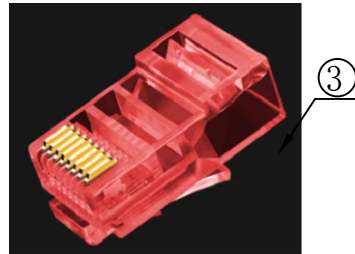

CAT6 UTP RJ45 Plug  
Transparent red  
100pcs/bag

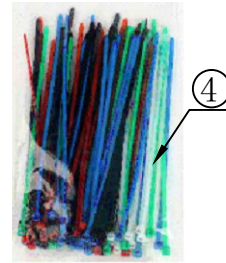

Cable tie:3.6\*200mm  
100pcs/bag



Packing:Cable, tool, plug, cable tie put in the box

Standard single label

**DE:** Dieses Produkt ist nicht für den dauerhaften Einbau in Gebäuden zugelassen.  
**EN:** This product is not approved for permanent installation in buildings.  
**FR:** Ce produit ne approuvé pas pour une installation permanente dans les bâtiments.  
**IT:** Questo prodotto non è approvato per l'installazione permanente negli edifici.  
**Kindly note:**  
 Zubehör innen liegend! / Accessories inside!

**MATERIAL LIST**

④	CABLE TIE	3*200mm	100PCS	
③	Plug	CAT6 UTP Plug, Pin gold plated Fu", Transparent red	100PCS	
②	Tool	see the picture	1	
①	CABLE	CAT.6 U/UTP 24AWG(1/0.5±0.008mm BC*1P)*4+ Cross+PVC+PE/Black(Pantone black 3C) OD:6.0±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

Item No.	Length(m)
55440	100.0
55441	305.0

ARVIN	NEW	2020-06-05	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE
			REV.

CUSTOMER NO.	WA	ITEM NO.	
PRODUCT NAME	CAT.6 U/UTP LAN CABLE PVC+PE	UNO ITEM NO.	UNIT MM
DRAWNBY	CHECKBY	APPOBY	DATE
Arvin	Alvan		2020-06-05