



Art No. WC0022

## Internet Indoor IP Camera IVS 1.3 Megapixel

### Feature:

- Easy network setup with your laptop / PC, and iPhone
- 1.3 Megapixel live MOS sensor with HDTV 720p quality, allowing users to notice minor details more easily
- SD card support for video storage
- Push Notification support to send an event notification to your iPhone and Android phones immediately once the specified event type is triggered, and play video recording once you confirm the receipt.
- White LED built-in to illuminate the scene manually, scheduled by a timer, or triggered by a motion, an alarm, or an audio event
- External alarm I/O device connection
- Microphone & speaker built-in for two-way audio transmission
- Complete Remote Surveillance Compatibility
  - 2 major computer operating systems, Microsoft Windows & Apple Mac
  - 5 commonly-used web browsers, Internet Explorer®, Mozilla Firefox®, Safari®, Google Chrome™ and Opera
  - 7 mobile platforms, iPad®, iPod®, iPhone®, BlackBerry®, Symbian, Windows® Mobile & Android™ (with their built-in web browsers, or our self-developed mobile program, EagleEyes)
  - For multiple device control, our self-developed program, Video Viewer, is provided for free for Windows-based and Mac-based operating systems

### Specification:

|  |  |
|--|--|
| <b>• Network</b>   |  |
| Network Compression                                      | H.264 / MPEG4 / MJPEG  |
| Multiple Video streaming (Encode Modes, IPS, Resolution) | 3 (H.264, MJPEG, MPEG4)  |
| LAN Port   | YES  |
| LAN Speed  | 10/100 Based-T Ethernet  |
| Supported Protocols                                      | DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP, UPnP |

\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered trademark of their respective owners.



Made in China



Art No. WC0022

## Internet Indoor IP Camera IVS 1.3 Megapixel

### Specification:

|                        |   |
|------------------------|---|
| ONVIF Compatible       | YES   |
| Frame Rate             | NTSC: 30, PAL: 25   |
| Number of Online Users | 10  |
| Security               | Multiple user access levels with password protection  |
| Web management         | (1) Web browsers, such as Internet Explorer, Mozilla Firefox, Google Chrome, Safari & Opera for single device access, or (2) Free CMS software, Video Viewer, for up to 16 network cameras control simultaneously |
| <b>• Camera</b>        |   |
| Image Sensor           | 1/3" live MOS image sensor  |
| Resolution             | SXGA, SXVGA, 720P, VGA, QVGA  |
| Min Illumination       | 0.1 Lux / F1.5, 0 Lux (LED ON)  |
| Shutter Speed          | 1 / 60 (1/50) to 1 / 100,000 sec.   |
| S/N Ratio              | More than 48dB (AGC off)  |
| Lens                   | f3.8mm / F1.5   |
| Viewing Angle          | 75°   |
| White LED              | YES (1W, 10 meters)   |
| White Balance          | ATW   |
| AGC                    | Auto  |
| IRIS Mode              | AES   |
| PIR Sensor             | Detection Range 76° wide angle with 5m long distance at 2m height (under 25°C)  |
| Micro SD Card Slot     | YES   |
| External Alarm I/O     | YES   |
| Microphone             | YES   |
| Speaker                | YES   |
| Power Source (±10%)    | 5V / 2A   |
| Operating Temperature  | 0°C~40°C  |



\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered trademark of their respective owners.



Made in China



Art No. WC0022


## Internet Indoor IP Camera IVS 1.3 Megapixel

### Specification:

| • Others                          |   |
|-----------------------------------|---|
| Mobile Surveillance               | iPad, iPod, iPhone, BlackBerry, Windows Mobile, Symbian & Android   |
| Push Notification                 | YES   |
| Audio Detection                   | YES   |
| RTC (real-time clock)             | YES   |
| Motion Detection                  | YES   |
| Digital Pan/Tilt/Zoom             | YES   |
| Event Notification                | FTP / Email   |
| Minimum Web Browsing Requirements | - Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD<br>- 256 MB RAM<br>- AGP graphics card, Direct Draw, 32MB RAM<br>- Windows 7, Vista & XP, DirectX 9.0 or later<br>- Internet Explorer 7.x or later |

### Package Contents

- 1 x IP Camera
- 1 x Camera Bracket
- 1 x Quick Installation Guide
- 1 x Adapter
- 1 x CD (User manuals + CMS software "Video Viewer")

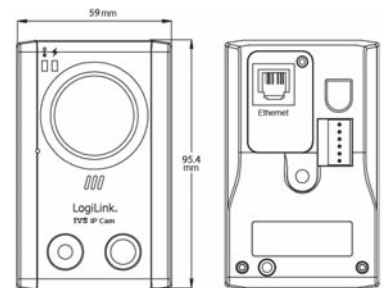

### Packaging Information:

- Packing Dimension: 208x104x99 mm
- Packing Weight: 0.5kg
- Carton Dimension: 514x440x345 mm
- Carton Q'ty: 30pcs
- Carton Weight: 15.6kgs



\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered trademark of their respective owners.



Made in China