


RoHS Compliant

HDMI A TYPE MALE

HDMI A TYPE MALE

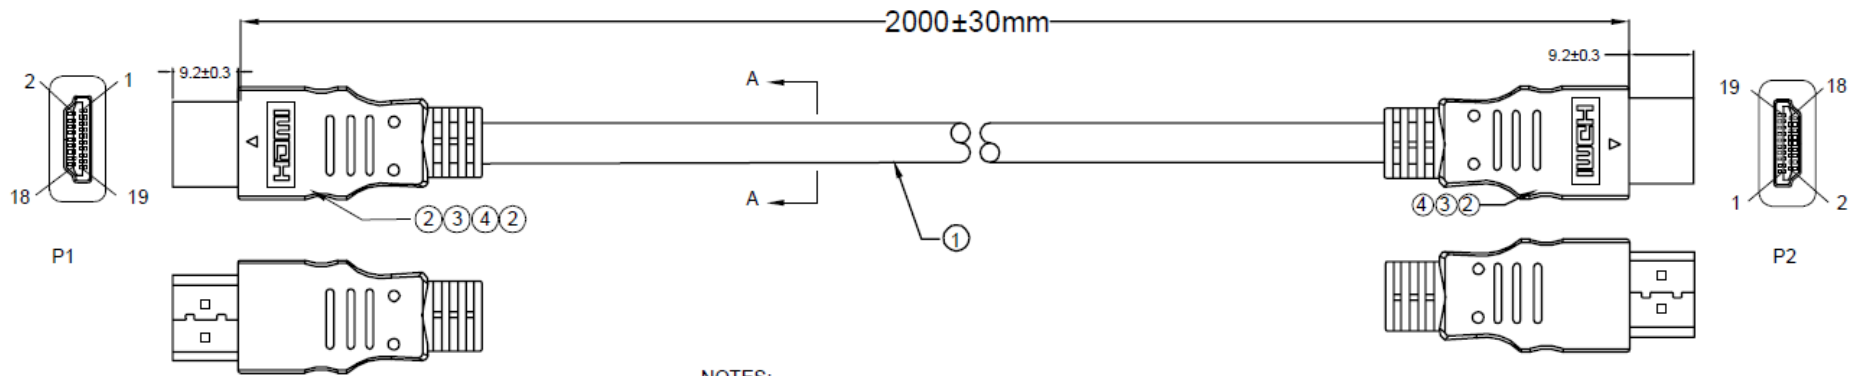

NOTES:

1. CABLE: NONUL[30AWG(7/0.10CCS)*1PR+AL+Mylar]*4C+30AWG(7/0.10CCS)*1pr+30AWG(7/0.10CCS)*4C
 +D30AWG(7/0.10CCS)+AL/MY OD=5.0±0.20mm ;Jacket Color: Black
 CABLE MUST PRINT: HIGH SPEED HDMI® CABLE AWM STYLE 20276 80°C 30V VW-1

2. CONNECTOR:

P1&P2: HDMI A/M 19P,SOLDER,BLACK INSULATION, PIN GOLD, NICKEL PLATED SHELL

3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BLACK.


4.INSIDE MOLDING: TRANSPARENT PE.

5.HEED: P1&P2 SIDE: NO Copper Foil Cover

6.ELECTRICLE TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
- (2)CONTACT RESISTANCE 5 ohm Max .
- (3)INSULATION RESISTANCE 10M ohm Min .
- (4)HI-POT TEST:DC 300V/10ms

7.COPPER OD TOLERANLE: ±0.008mm

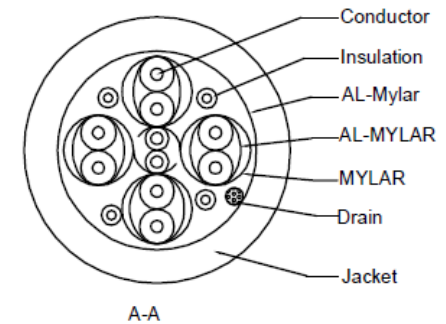

PIN Assignment		
P1	P2	CABLE FUNCTION
1	1	TMDS Data2+
3	3	TMDS Data2-
4	4	TMDS Data1+
6	6	TMDS Data1-
7	7	TMDS Data0+
9	9	TMDS Data0-
10	10	TMDS Clock+
12	12	TMDS Clock-
13	13	CEC
15	15	SCL
16	16	SDA
17	17	DDC/CEC Ground
18	18	+5v Power
19	19	Hot Plug Detect
Shell	Shell	Ground