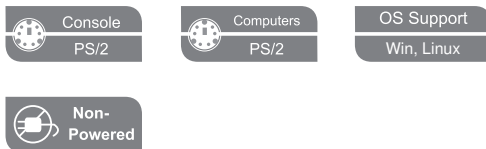# CS62 / CS62S

2-Port PS/2 KVM Switch

The CS62/CS62S Switch is a control unit that allows access to two computer systems from a single console (keyboard, monitor, and mouse). The CS62/CS62S improves on previous models with a 50% smaller desktop footprint plus attached custom KVM cables for hassle-free installation and a neat and tidy workspace.

Setup is fast and easy; plugging cables into their appropriate ports is all that is entailed. There is no software to configure, no installation routines, and no incompatibility problems.
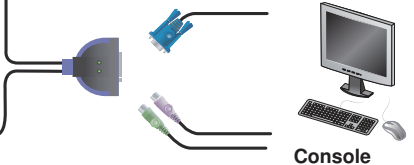
Computer 1

Computer 2

Console

Console	Computers	OS Support
PS/2	PS/2	Win, Linux

Non-Powered

Specification

Function			CS62	CS62S
Computer Connections			2	
Port Selection			Hotkey	
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)	
		Video	1 x HDB-15 Female (Blue)	
		Mouse	1 x 6-pin Mini-DIN Female (Green)	
	KVM Ports	Keyboard	2 x 6-pin Mini-DIN Male (Purple)	
		Video	2 x HDB-15 Male (Blue)	
		Mouse	2 x 6-pin Mini-DIN Male (Green)	
LEDs	Selected		2 (Green)	
Cable Length	Computers		1.2m	0.9m
Emulation	Keyboard/Mouse		PS/2	
Video			2048 x 1536; DDC2B	
Scan Interval			3, 5, 10, 20 Seconds	
Environment	Operating Temp.		0-50°C	
	Storage Temp.		-20-60°C	
	Humidity		0-80% RH, Non-condensing	
Physical Properties	Housing		Plastic	
	Weight		0.33 kg	0.33 kg
	Dimensions (L x W x H)		7.30 x 6.24 x 2.25 cm	7.30 x 6.24 x 2.25 cm

* The specifications and pictures are subject to change without notice.

Features

• One PS/2 console controls two PS/2 computers
• Compact design, built in 1.2m cables(CS62),0.9m Cables(CS62S)
• All-in-one design
• Superior video quality- up to 2048 x 1536; DDC2B
• Auto Scan function to monitor computer operation
• Non-powered